


Place in Rose of Manxham

HOTELS AT THE FOLLOWING STATIONS
ARE UNDER
THE COMPANY'S MANAGEMENT.

EUSTON, LONDON.
LIVERPOOL.
BIRMINGHAM.
PRESTON.
CREWE.
HOLYHEAD.
GREENORE.
NORTH WALL, DUBLIN.
BLETCHLEY.

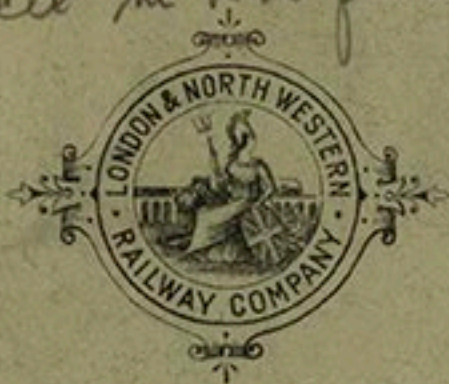

QUEEN'S HOTEL.

BIRMINGHAM.

Lloyd's British Testing
Co¹⁹⁰
Directors Sir Geo Stingley
John Green

G. F. Simms

H. M. Stingley

H. Dickinson, Secy

visited Cradley Heath Proving
House.

— Dudley Super.

met Mr Sampson.

Tested three links of 1 3/4
shd link chain to breaking



© 2018

Lloyd's Register
Foundation

test then broke the link
clear of the weld.

Tested a Sykes Anchor
of ^{cwt} 61.2. 12 lbs total weight
for tensile strain.

The head was made at the
Greenock works, Magdeburg
Netherston Diving House
St Green. L. per.

Tested 3 links of $3\frac{3}{4}$ stud
link chain cable left from
the chains of the Lusitania.
tested to 350 tons without flaw
then tested 3 other links which
had also been tested to 350 tons.
One of these links had been
partly sawn through ^{the weld} (say about
one fifth of area) this link
broke at 261 tons. The
break fracture showed that
the weld had been excellent.

15 fms of $3\frac{3}{8}$ stud chain was
tested to the tensile strain of
169 $\frac{1}{2}$ tons.

4 per cent of the number of
lengths of all chains have
the shackle end link and enlarged
link tested.

Swivels are enlarged like the
open link and tested to the
breaking test of the chains
they are intended for.

N. Hingley & Sons made all
the anchors for L & M and
the chains for L. making
special use



© 2018

Lloyd's Register
Foundation