

# Lloyd's Register of Shipping.


## SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

F. 221

Ship's Name Dalkey Coast Port of Survey Lübeck  
Travewerft No 194 N.N. CITY of GERMANY  
 Official Number 40029 Surveyor's Signature Arno Jaar  
 Nationality and Port of Registry Ireland - Dublin Date of Survey Whilst building

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement :-

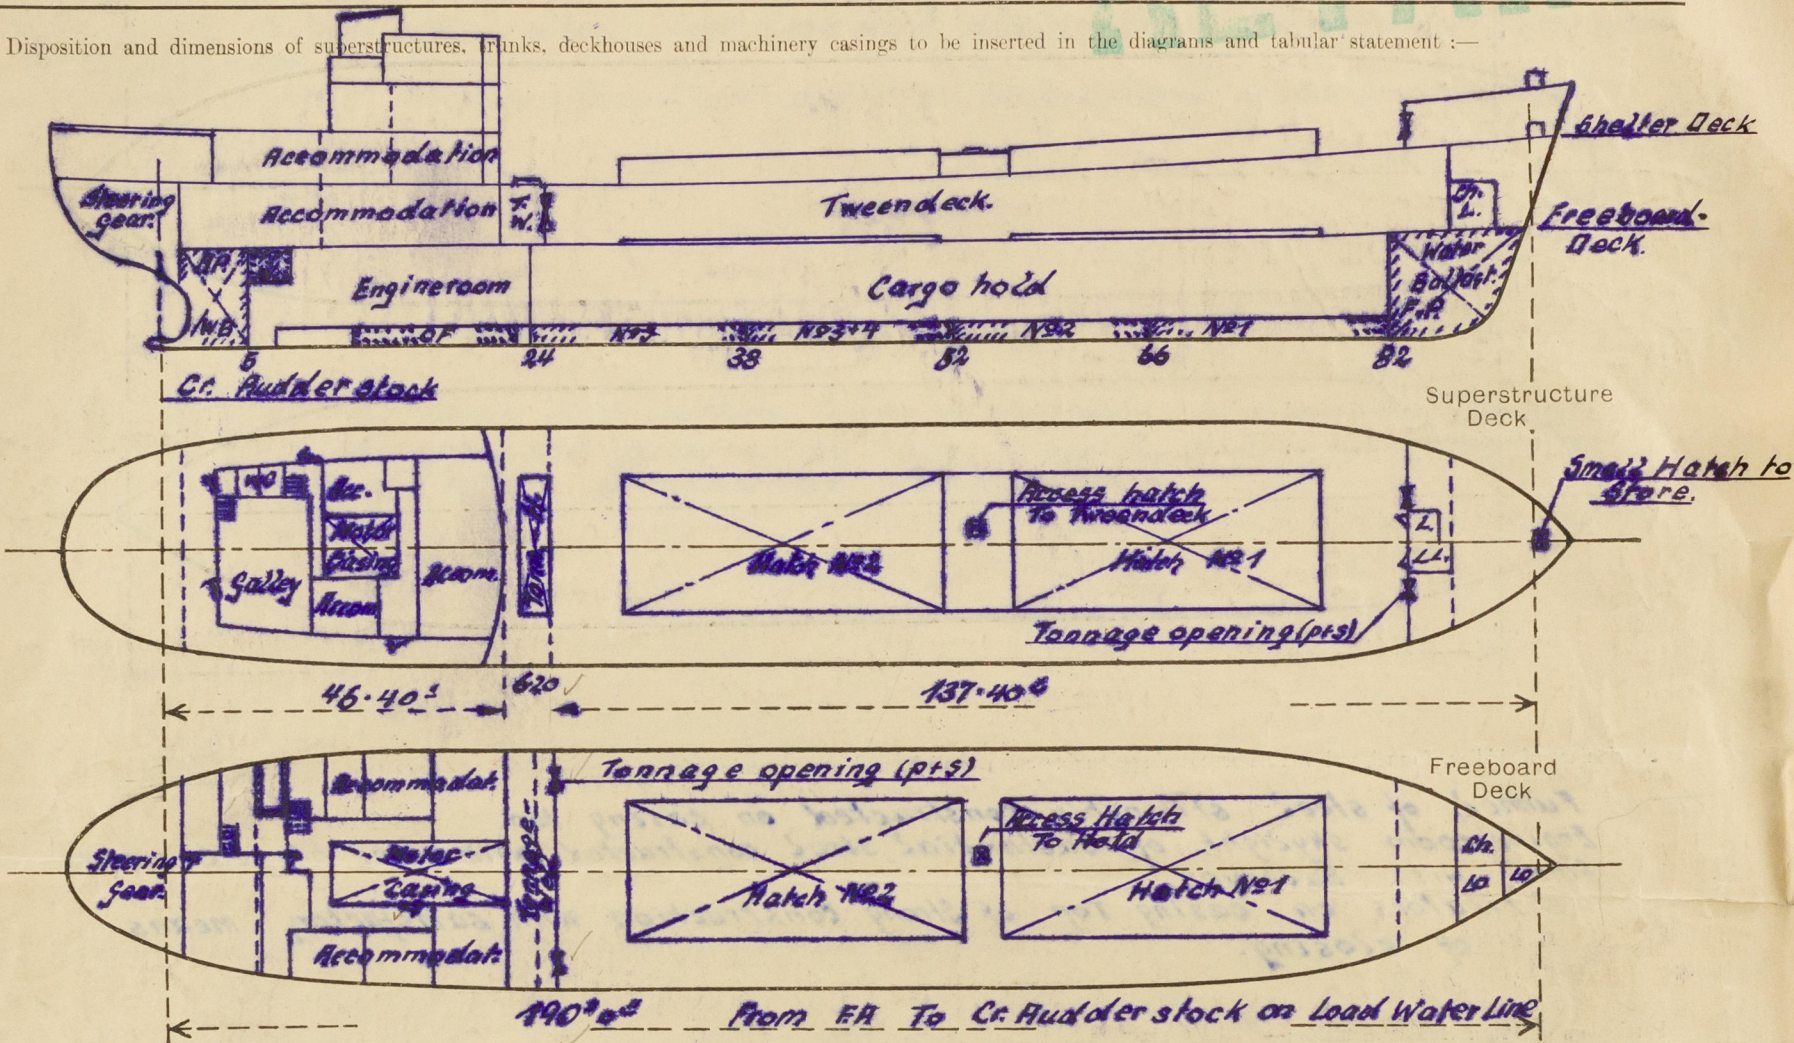

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead <i>in Tonnage Well</i>	-	.24	4 1/2 x 24	29 1/8"	Top + Bottom EW.	-	-	9' 2 1/4"
Raised Quarter Deck Bulkhead ...	-	-	-	-	-	-	-	-
Bridge, After Bulkhead ...	-	-	-	-	-	-	-	-
Bridge, Forward Bulkhead... <i>in Tonnage Well</i>	-	.24	3 1/8 x 26	30"	Top + Bottom EW.	3' x 4'	24"	9' 6 1/2"
Forecastle Bulkhead...	-	-	-	-	-	-	-	-
Trunk, Aft ...	-	-	-	-	-	-	-	-
Trunk, Forward ...	-	-	-	-	-	-	-	-
Exposed Machinery Casings on Freeboard or Raised Quarter Decks...	-	-	-	-	-	-	-	-
Exposed Machinery Casings on Superstructure Decks ...	-	-	-	-	-	-	-	-
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	.29	.24	3 1/8 x 26	24 7/8"	Continued at Top Bottom - NO	Tweendeck 5' 3" x 23 1/2" (53)	9"	-
Deckhouses on Flush Deck Ships ...	-	-	-	-	-	-	-	-

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead <i>in Tonnage Well</i>	No Openings
Raised Quarter Deck Bulkhead ...	/
Bridge, After Bulkhead ...	/
Bridge, Forward Bulkhead <i>in Tonnage Well</i>	Portable steel plates (pts) secured by Hook bolts spaced 10'
Forecastle Bulkhead...	/
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	/
Exposed Machinery Casings on Superstructure Decks ...	/
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	In tweendeck (ss) Steel hinged door operated from both sides.
Deckhouses on Flush Deck Ships ...	/









# PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.											
Description of Hatchway			Shelter Deck No 1	Shelter Deck No 2	Freeboard Deck No 1	Freeboard Deck No 2	Forecastle Deck	Within Forecastle	Between Forecastle & Main Deck	Tonnage Hatch	
Dimensions of Hatchway			45'5" x 15'7"	45'5" x 15'7"	45'5 1/4" x 15'7 1/2" x 15'7 1/2"	24'0" x 24'0"	24'0" x 24'0"	24'0" x 24'0"	24'0" x 24'0"	18'7 1/4" x 10'6"	
COAMINGS	{	Height above Deck	37 3/8"	37 3/8"	10'0"	10'0"	2'4"	1'8"	1'8"	9'0"	
		Thickness {	Sides	.49	.49	5'10" x 3 1/2"	5'10" x 3 1/2"	.24	.24	.24	5'10" x 3 1/2"
			Ends	.49	.49	5'43"	5'43"	.24	.24	.24	5'10" x 3 1/2"
		Stiffeners	.32	.32	-	-	-	-	-	-	
			Brackets, Stays	62	62	-	-	-	-	-	
HATCH BEAMS	{	Number	9	9	9	9					
		Spacing	4'4 3/8"	4'4 3/8"	4'6 1/2"	4'6 3/4"					
		Scantling and Sketch	7 1/8" x 39"	7 1/8" x 39"	7 1/8" x 63"	7 1/8" x 63"					
		Bearing Surface	5 1/2"	5 1/2"	5 1/2"	5 1/2"					
FORE AND AFTERS	{	Number	NOT FITTED								
		Spacing									
		Unsupported Lengths									
		Scantling* and Sketch									
			Bearing Surface								
HATCH COVERS	{	Material	Wood	Wood	Wood	Wood	Steel	Steel	Steel	Steel	Wood
		Thickness	2 1/2"	2 1/2"	2 1/2"	2 1/2"	hinged	hinged	hinged	hinged	2 1/2"
		How fitted	Fore & aft	Fore & aft	Fore & aft	Fore & aft	Water-tight	Water-tight	Water-tight	Water-tight	Water-tight
		Bearing Surface	5'4"	5'4"	3'4"	3'4"	2'0"	2'0"	2'0"	2'0"	2'0"
Spacing of Cleats			2'4"	2'4"	2'4"	2'4"					
Number of Tarpaulins			2	2	1	1					
<div>*Are wood fore and afters steel shod at all bearing surfaces? None fitted</div> <div>Are battens and wedges efficient and in good condition? yes</div> <div>Are tarpaulins in good condition and in accordance with rule requirements? yes</div> <div>Are lashings provided in accordance with rule requirements? yes</div>											

Particulars of any special features:

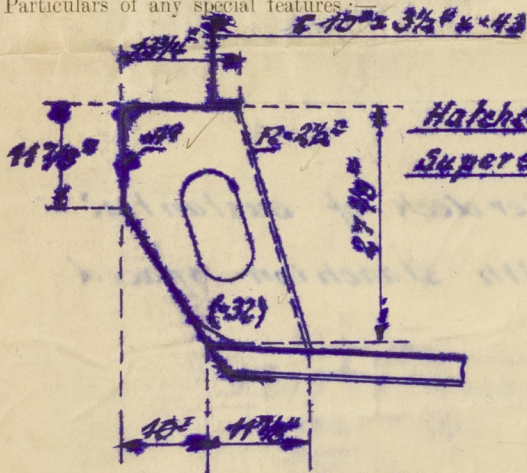

Forecastle on Shelter deck.

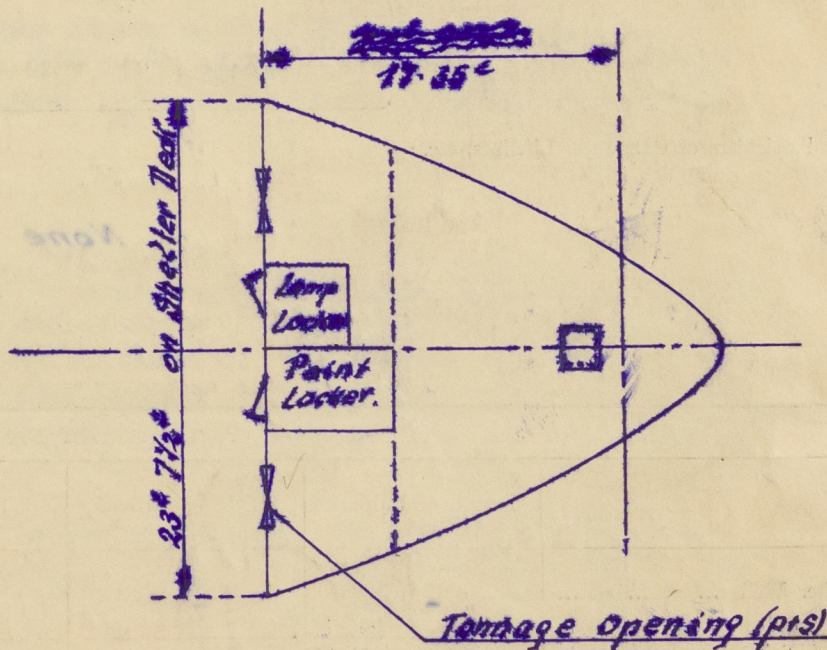

Particulars of Superstructures on Shelterdeck								
	Coaming	Plating	Stiffeners	Spacing	End Attach. of Stiffeners	Size of Opening	High of Sill	High of Decking
Forecastle Bulkhead	NONE	24	2 1/2" x 24	23"	Top & Bottom E.W.	5' x 4'2"	24"	6'10 1/8"
Particulars of Closing Appliances								
Forecastle Bulkhead	Portable Steel Hinged Doors (17' x 18') secured by Hook bolts spaced in							
	Steel hinged doors operated from both sides (Access to lockers)							