

Encls

Lloyd's Register of  
British & Foreign Shipping

Glasgow 17<sup>th</sup> Sept 1890.


The Secretary  
LLOYD'S REGISTER,  
LONDON.  
REC'D 18 SEP. 90  
ANSR. London

Sir

In reply to your telegram of today respecting the P. S. on the Comp Ship "Leander" we beg to state that this vessel was placed in Messrs D & W Hendersons dry dock on the 11<sup>th</sup> inst. for the purpose of having the bottom examined & if necessary redubbed & repatched. On visiting the vessel on this date we informed the Captain that she was due for special survey & gave him, for the owners information, an extract from the rules, Sectn 43.

Subsequently it was decided to take off the sheathing and the Captain also informed us that he had received instructions to prepare the vessel for survey.


Accordingly we yesterday visited the vessel & found the ballast removed for soft at fore end of hold the timbers & part of the ceiling with cement in one space between floors at the

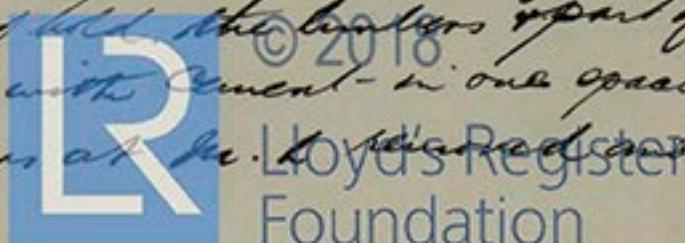

the parts thereby exposed all in good order.

On examination however of frames between close ceiling and the hold beam stringers we found these at several places seriously affected by galvanic action & coated with rust or dirt. Metals found on the upper deck flat several framing pieces, which, upon removal were found to be covering defective planks & the planking at other parts, such as under the galley at the break of R. 2. D. & Hatchways &c in an advanced state of decay: the same remarks apply to the after part of the R. 2. D.

We have accordingly recommended that the keel should be removed so that the timbers & ceiling beams can be lifted at the remaining parts of the hold; that the Cement should be cut out at fine other places over to expose the plate &c. that the whole of the sparring from below hold beams & Sub Strakes above should be removed & all iron work at these parts properly cleaned for

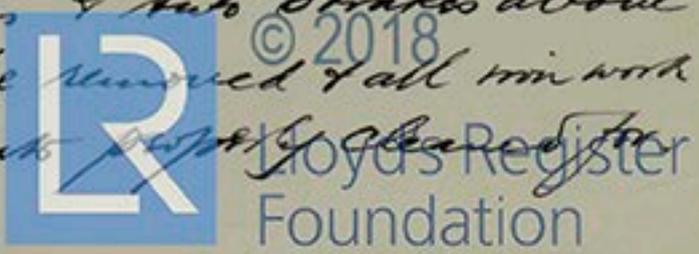

3  
examination, and that the greater  
part of the upper deck and the  
after portion of the P.D. flats  
should be renewed.

Dear Sir,  
your obedient servants

J. Watkins.  
R. Elliott

The London report - 104602/A  
of Continuation survey is herewith  
returned

J. R. B.



© 2018

Lloyd's Register  
Foundation

LLOYD'S REGISTER,  
LONDON.  
RECP: 110 SEP. 90  
AN82

17.9

Surveyors.

Reps. in case

P. Leander

dress. don. ext.

R. Elliott

To Mr. Keith surveyors

2/20

1879/19/18



© 2018

Lloyd's Register  
Foundation