


Lloyd's Register of Shipping.
SURVEYS FOR FREEBOARD.
(CONDITIONS OF ASSIGNMENT.)

Index No. 37979.
(For London Office only).

Ship's Name *BRITISH VIRTUE*
Official Number *180567*
Nationality and Port of Registry *British*

Port of Survey *NEWCASTLE-ON-TYNE*
Surveyor's Signature *E.H. Dean for self & J. Minn.*
Date of Survey *while Building.*

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

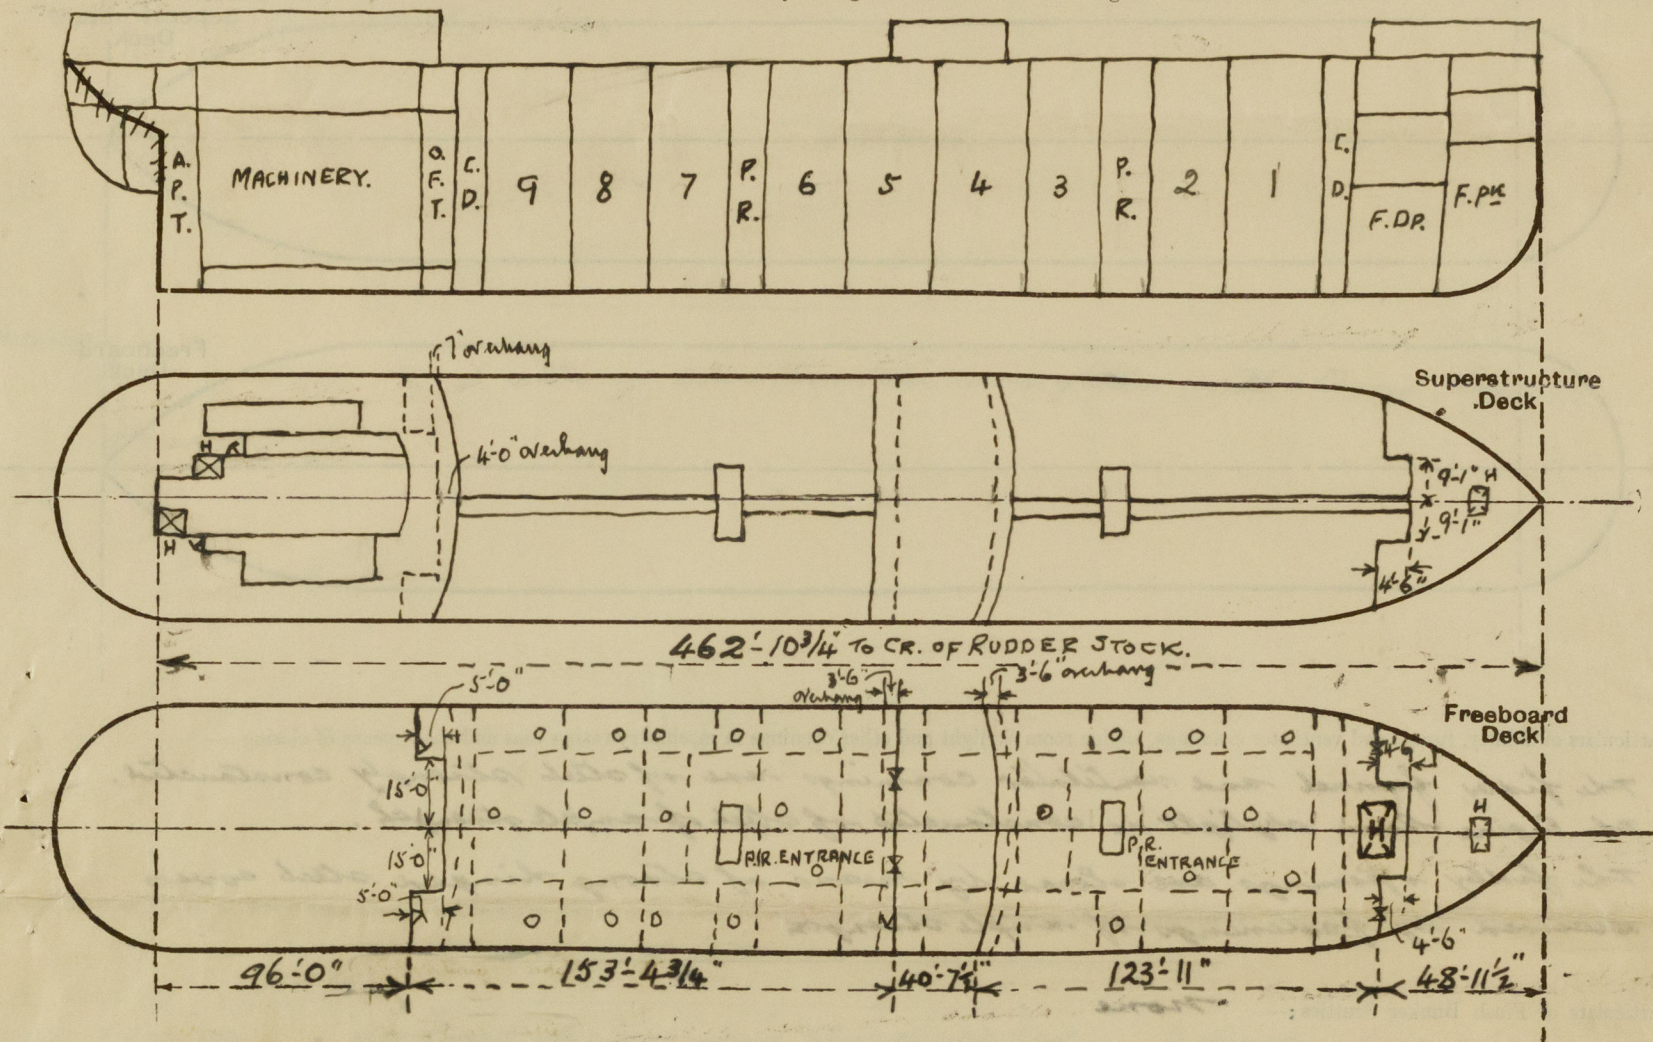

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead44	.44	9 1/2 x 3 1/2 x 50 L 10 1/2 x 3 1/2 x 40 L (Riveted)	about 30"	welded top and botm.	2 @ 5'-0" x 2'-6"	18"	8'-0" to 8'-7"
Raised Quarter Deck Bulkhead	none							
Bridge, After Bulkhead32-.30	6 1/2 x 3 1/2 x 34-36 L (Riveted)	about 30"	none	2 @ 4'-1" x 3'-1" 1 @ 4'-3" x 2'-3"	18"	8'-0"
Bridge, Forward Bulkhead44	.44	10 1/2 x 3 1/2 x 40 L (Riveted)	about 30"	welded top and botm.	1 @ 5'-0" x 3'-0"	18"	8'-0"
Forecastle Bulkhead30	.30	4 1/2 x 3 1/2 x 32 L (Riveted)	about 30"	none	2 @ 4'-1" x 3'-1" 1 @ 5'-0" x 2'-3"	18"	8'-0"
Trunk, Aft								
Trunk, Forward	-							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks	-							
Exposed Machinery Casings on Superstructure Decks30	.30	3 1/2 x 3 1/2 x 30 L 3 1/2 x 2 1/2 x 36 L	about 30"	plates set at top	2 @ 5'-1" x 2'-3"	18"	8'-0"
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	-							
Deckhouses on Flush Deck Ships	-							

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead	2 Hinged steel w.t. doors capable of being manipulated from both sides
Raised Quarter Deck Bulkhead	1 Hinged steel w.t. door capable of being manipulated from both sides
Bridge, After Bulkhead	2 openings closed by portable steel plates fitted with hook bolts.
Bridge, Forward Bulkhead	1 Hinged steel w.t. door capable of being manipulated from both sides
Forecastle Bulkhead	2 openings closed by portable steel plates fitted with hook bolts.
Exposed Machinery Casings on Freeboard or Raised Quarter Decks	-
Exposed Machinery Casings on Superstructure Decks	2 Hinged steel w.t. doors capable of being manipulated from both sides.
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	-
Deckhouses on Flush Deck Ships	-


Name of Ship *BRITISH VIRTUE*

Freeboard Report Examined

(Date) *Jan 1957*

Signed *gllan*

BRITISH VIRTUE

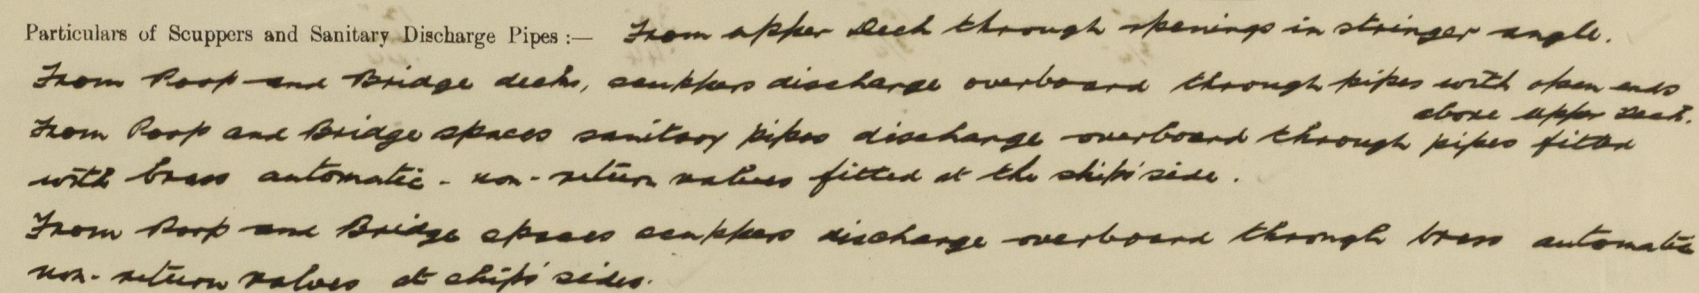Particulars of Gangway Cargo and Coaling Ports:— *None*

Particulars of Side Scuttles:—
Side scuttles are of strong construction and fitted with strong hinged
deadlights

Vertical distance of Sill of lowest Side Scuttle above top of keel ✓ *no side scuttles fitted below gunports Sh.*

Particulars of Guard Rails:—
 at Loop, Bridge and Tresseltts wh.: 3 Rails about 3'6" high and
 stanchions spaced about 4'6" apart ✓
 at Upper Dock: 3 Rails - 3'6" high with stanchions about 4'0" apart

Particulars of Gangways, Lifelines, etc. :-

4 4 4 s. 40 L 9
TOP WELDED

1 6" 1 6" 1 6"

1/2" steel chequer plateing.

2 2"

about 8 1/2" high ahead 8 0" to 8 3/4" apart.

4 4 4 s. 40 L 9

5 5 5 s. 40 L 9

Stanchions of Substantive make
2 1/2 x 3 3/4" flat welded to stringer
3 1/2" high, 2 rails about 4 1/2" apart.

welded to deck.

Particulars of Gangways, Lifelines, etc. :—

on Roof Deck.
40° 6' Star 30° x 30' ceiling. C.V.
10° 6' 30° x 30' Midroom Deck.
a number of strongly constructed steel
governor nests. 8" x 4" and 6" x 4" 30" above
deck, are also fitted.

a number of strongly constructed steel
governor vents, 8" x 4" and 6" x 4" 30" above
deck, are also fitted.

all ventilators and coamings are fitted
with wood plugs and canvas covers as
the means of closing.


Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :—

all air pipe fitted with wire gauze,
and closed by means of wood plugs

	Length of ^{well} Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well	153' 5 3/4"	4'-0"	SEE SKETCH		open sails for a length of more than half the	
Forward Well	123'-11"	4'-0"	D ²		length of either well.	

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :—

Additional area where sheer is less than standard.

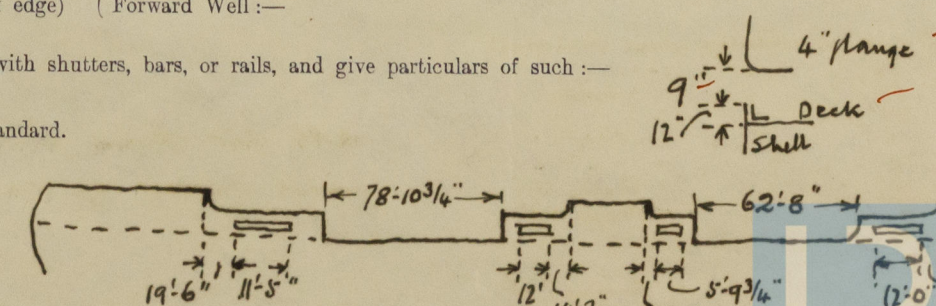

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
Description of Hatchway		O.T. Hatchways to side tank		O.T. Hatchways to center tank		Hatched to Fore Hold		manholes to Cofferdams	
Dimensions of Hatchway		18 @ 4'-0" diam.		9 @ 4'-0" diam.		10'-6" x 6'-9"		4 @ 25" x 19 1/2"	
COAMINGS	Height above Deck	10"		10"		30"		12"	
	Thickness	3/4"		3/4"		.44		.44	
	Sides								
	Ends								
	Stiffeners								
	Brackets, Stays								
HATCH BEAMS	Number	The O.T. hatches on the upper deck							
	Spacing	are the approved standard emergency type							
	Scantling and Sketch								
	Bearing Surface								
FORE AND AFTERS	Number								
	Spacing								
	Unsupported Lengths								
	Scantling* and Sketch								
	Bearing Surface								
HATCH COVERS	Material	steel		steel		Steel		steel	
	Thickness	.40		.40		.50		.40	
	How fitted	hinged		hinged		Stiffened.		hinged	
	Bearing Surface	3/4"		3/4"		3"		3"	
Spacing of Cleats									
Number of Tarpaulins									
*Are wood fore and afters steel shod at all bearing surfaces? - Are battens and wedges efficient and in good condition? - Are tarpaulins in good condition and in accordance with rule requirements? - Are lashings provided in accordance with rule requirements? -									

Particulars of any special features:—

O.T. Bunker Hatchway (Number) 2 off 3'-0" x 3'-0" x 2'-6" steel coaming fitted with hinges steel covers.

2 steel hatches on Fore Deck 30" x 40" 2'-6" x 3' coaming fitted with wood covers, 2 tarpaulins, battens and cleats.

Hatch on Fore Deck 3'-7" x 3'-1" coaming 9" x .40 steel, fitted with steel hinges cover. *watertight*

Hatch on upper deck in Fore 3'-6" x 3'-0" coaming 12" coaming .40 steel fitted with hinges steel cover

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.



© 2020

Lloyd's Register Foundation