

21 JUN 1945

Rpt. C. 11 (Contd.)

Index No.

Lloyd's Register of Shipping.

Ship's Name "BRIARFIELD"

Official No. 143869.

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines in ✓

ALTERATIONS FOR NEW ACCOMMODATION OF CREW.

Accommodation has now been made in the Forecastle space for the crew.


A steel bulkhead has been erected at the forecastle front of strong construction and is fitted with 2 hinged wood doors with brass locks operated both sides.

Size of openings 5'-0" x 2'-0" with 2" sill.

The forecastle deck has been renewed in steel.

The companionway to the previous accommodation has been removed and the deck opening plated over.

An access hatch to the above space has been fitted on the starboard side 22" x 22" x 15" coaming fitted with hinged steel W.T. cover secured by toggle screw fastenings.

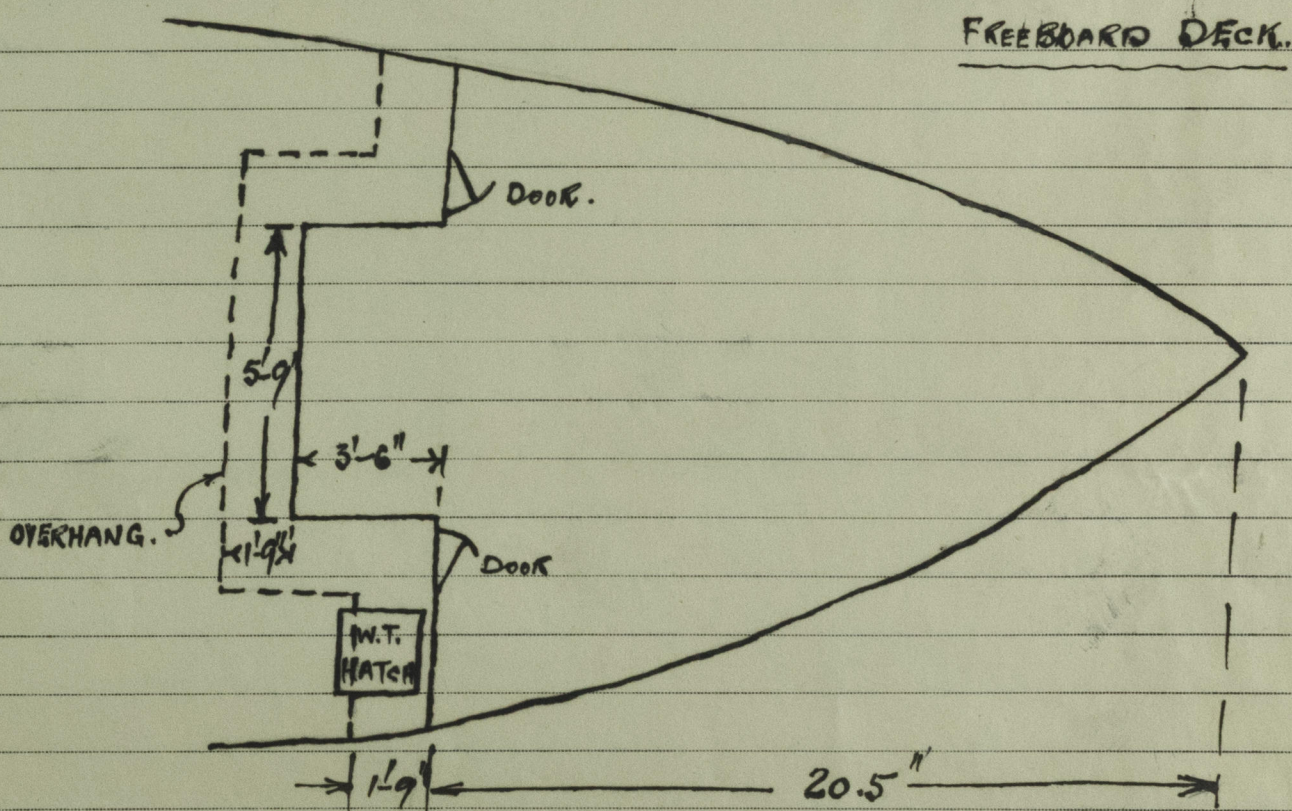

A copy has been placed in board.

Noted.
no specification to
floor. owing to present
limit on construction

Rockhampton
9.6.45