

Chief Engineer Surveyor

Received from Chief Engineer Surveyor

NAME "ASLAUG TORM" REPORT Augsburg. Got. 19535.

No. 173.

167.

Remarks of the Chief Engineer Surveyor are desired on this case for the consideration of the Classing Committee.

"The endorsement to contain a succinct summary of any repairs that have been required and to show the cause or causes of such repairs, and also to bring out clearly any exceptional features in connection with the case, so that the Classing Committee may have all the salient points presented in the endorsement."—Extract from Sub-Committee's Report, 24/6/92.)

Type of Engine Oil Engine 2 SCSA

7 cyl. 30.11/16" - 55. 1/8"

New MN 1260.

~~If Boilers fitted with forced draught~~

Tail Shaft. If fitted with a continuous liner Yes.

If fitted with an outside gland of approved type No.

The torsional vibration characteristics of the main propelling machinery were approved in the Secretary's letter of 30. 10. 51 for a service speed of 115 RPM, provided a notice board be fitted at the control station stating that the engine is not to be operated continuously between 40 and 50 RPM and the tachometer be marked accordingly and a suitable entry made in the S.R.L.

Similar calculations for the 130 KW generator sets were approved in the Secretary's letter of 21.2.53 for a service speed of 515 RPM.


This vessel's machinery appears to have been built in accordance with the Rules and the approved plans, and it is submitted she is

eligible to be classed ~~LMC 12,52~~ **1,53**

"Carrying petroleum in bulk".
2 DB 171 lb.

8. Note for S.R.L.

Exhaust gas economiser to be examined at each DBS.

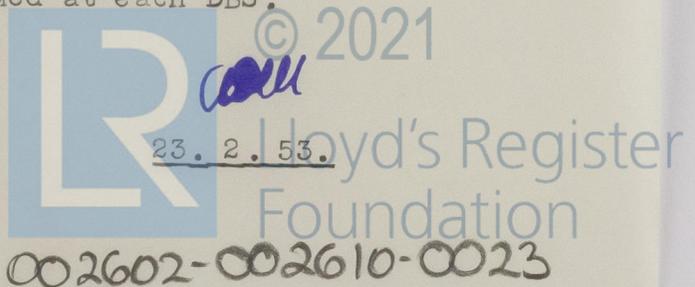

002602-002610-0023