

REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

WED. NOV. 11 1922

Date of writing Report 10. 10. 1922 When handed in at Local Office 30. 10. 1922 Port of Glasgow.

No. in Survey held at Glasgow Date, First Survey 28. 8. 1922 Last Survey 6. 10. 1922
Reg. Book. 45184 on the 3/5 "TJIBESAR" (Number of Visits 2)

Built at Port Glasgow By whom built Messrs. Glasgow Ltd. Yard No. 443 Tons { Gross 12000
Net

Owners Java Shipping Japan Line Port belonging to Batavia

Electric Light Installation fitted by Messrs. The Sunderland Forge & Eng. Co. Ltd. Contract No. 443 When fitted 1922

System of Distribution Two Wires

Pressure of supply for Lighting 110 volts, Heating ✓ volts, Power ✓ volts.

Direct or Alternating Current, Lighting Direct Power ✓

If alternating current system, state frequency of periods per second ✓

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off yes ✓

Generators, do they comply with the requirements regarding overload yes ✓, are they compound wound yes ✓

are they over compounded 5 per cent. yes ✓, if not compound wound state distance between each generator.

Where more than one generator is fitted are they arranged to run in parallel no ✓, is an adjustable regulating resistance fitted in

series with each shunt field yes ✓

Are all terminals accessible and clearly marked yes ✓, are they so spaced or shielded that they cannot be accidentally earthed,

or short circuited yes ✓ Are the lubricating arrangements of the generators as per Rule yes ✓

Position of Generators Bottom platform Engine Room ✓, are they clear of all inflammable material yes ✓

is the ventilation in way of the generators satisfactory yes ✓, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators

and ✓, are the generators protected from mechanical injury and damage from water, steam or oil yes ✓

are their axis of rotation fore and aft yes ✓

Earthing, are the bedplates and frames of the generating plant efficiently earthed yes ✓ are the prime movers and

their respective generators in metallic contact

Main Switch Boards, where placed Close to Generator ✓

If the generators and main switchboard are not placed in the same compartment, is each generator provided with

a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard ✓

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes yes ✓

are they protected from mechanical injury and damage from water, steam or oil yes ✓, if situated near unprotected

woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards — and —

are they constructed wholly of durable, incombustible non-absorbent materials yes ✓, is all insulation of high dielectric strength and of

permanently high insulation resistance yes ✓, if semi-insulating material is used, are all conducting parts connected to one pole

insulated from the slab with mica or micanite and the slab similarly insulated from its framework yes ✓, and is the

frame effectively earthed yes ✓ Are the following fittings as per Rule, viz.:— spacing or shielding of live parts

yes ✓, accessibility of all parts. yes ✓, absence of fuses on back of board yes ✓, proportion of omnibus

bars yes ✓, individual fuses to voltmeter, pilot or earth lamp yes ✓, connections of switches yes ✓

Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches Double pole


Switch & fuses for Generator, double pole changeover switches & fuses for outgoing circuits

Instruments on main switchboard 2 ✓ ammeters 2 ✓ voltmeters — ✓ synchronising device for paralleling purposes.

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system Earth lamps ✓

Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules yes ✓

Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule yes ✓

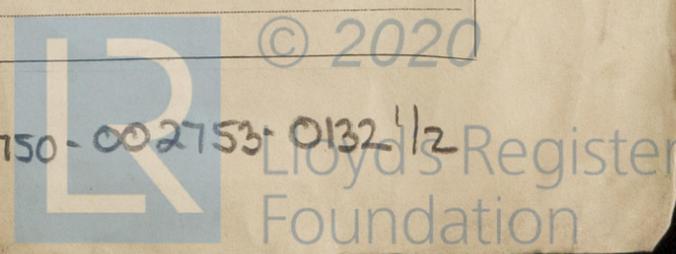

Insulation of Cables, state type of cables, single or twin Single & Twin are the cables insulated and protected as per Tables III or IV of the Rules yes

Fall of Pressure, state maximum between bus bars and any point of the installation under maximum load 3 volts

Cable Sockets and other connections, are the ends of all cables having a sectional area of 0.007 square inch and above provided with soldering sockets yes

Paper Insulated Cables. If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound yes

Cable Runs, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage yes

Support and Protection of Cables, state how the cables are supported and protected in G.I. pipes & clips to beams

If cables are run in wood casings, are the casings and caps secured by screws yes, are the cap screws of brass yes, are the cables run in separate grooves yes. If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VI yes

Refrigerated Chambers, if lights are fitted, are the cables and fittings in accordance with the special requirements yes

Joints in Cables, state if any, and how made, insulated, and protected none made

Watertight Glands and Deck Tubes, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands yes

Bushes in Beams and Non-watertight Positions, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed yes state the material of which the bushes are made fibre

Earthing Connections, state what earthing connections are fitted and their respective sectional areas none

are their connections made as per Rule yes

Alternative Lighting, are the groups of lights in the propelling machinery space arranged as per Rule yes

Emergency Supply, state position and method of control of the emergency supply and how the generator is driven none

Navigation Lamps, are these separately wired yes, controlled by separate switch and separate fuses yes, are the fuses double pole yes, are the switches and fuses grouped in a position accessible only to the officers on watch yes, has each navigation lamp an automatic indicator as per Rule yes, are separate screens provided for the use of oil and electric side lights yes, are separate oil lanterns provided for the mast head lights and side lights yes

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight yes, are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected yes S.I. Guards, are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected no, how are the cables led yes, where are the controlling switches situated yes

Searchlight Lamps, No. of 1, whether fixed or portable yes, are their fittings as per Rule yes

Arc Lamps, other than searchlight lamps, No. of 1, are their live parts insulated from the frame or case yes, are their fittings as per Rule yes

Motors, are their working parts readily accessible yes, are the coils self-contained and readily removable for replacement yes, are the brushes, brush holders, terminals and lubricating arrangements as per Rule yes, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material yes, are they protected from mechanical injury and damage from water, steam or oil yes are their axis of rotation fore and aft yes, if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type yes, if not of this type, state distance of the combustible material horizontally or vertically above the motors yes and yes

Control Gear and Resistances, are the generator field and motor speed regulators, starters and controllers constructed as per Rule yes

Lightning Conductors, where lightning conductors are required, are these fitted as per Rule yes

Ships carrying Oil having a Flash Point less than 150° F. Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings yes

If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office yes

Fitted for oil fuel 10.22 J.P. above 150° F

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY.	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN	1	24.5	110	250	300	Open Type inverted		
AUXILIARY	1	11.5	110	105	300	Open Type		
EMERGENCY								
ROTARY TRANSFORMER								

LIGHTING AND HEATING CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Conductors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Ampères.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	MAIN GENERATOR... NO. 1	2	.19	19	.083	135	40 ft	V.I.R.	G.I. Piping
	AUXILIARY GENERATOR NO. 2	2	.19	19	.083	105	50	do	do
	EMERGENCY GENERATOR								
	ROTARY TRANSFORMER...								
	AUXILIARY SWITCHBOARDS								
	ENGINE ROOM	2	.0225	4	.064	37	120 ft	do	do
	BOILER ROOM								
	Navigation	2	.01	4	.044	11.8	306	do	do
	Accommodation	2	.06	19	.064	84	294	do	do
	Forward Holds	2	.01	4	.044	16.2	522	do	do
	Aft Holds	2	.0225	4	.064	26	328	do	do
	WIRELESS	2	.0225	4	.064	35	316 ft	do	do
	SEARCHLIGHT								
	MASTHEAD LIGHT	2	.002	3	.029	1.2	280	do	do
	SIDE LIGHTS	2	.002	3	.029	1.2	44	do	Lead Covered
	COMPASS LIGHTS	2	.002	3	.029	.6	15	do	do
	STEER LIGHTS	2	.002	3	.029	1.2	315	do	C.I. Piping
	CARGO LIGHTS	2	.002	40	.0046	3.6	50	do	Gal. Type Hex
	ARC LAMPS								
	HEATERS								

MOTOR CONDUCTORS.

Ref. No.	DESCRIPTION.	No. of Motors.	Effective Area of each Conductor. Sq. Ins.	COMPOSITION OF STRAND.		Total Maximum Current. Ampères.	Approximate Length. (Lead and Return.) Feet.	Insulated with	HOW PROTECTED.
				No.	Diameter.				
	BALLAST PUMP								
	MAIN BILGE LINE PUMPS								
	GENERAL SERVICE PUMP								
	EMERGENCY BILGE PUMP								
	SANITARY PUMP								
	CIRC. SEA WATER PUMPS								
	CIRC. FRESH WATER PUMPS								
	AIR COMPRESSOR								
	FRESH WATER PUMP								
	ENGINE TURNING GEAR								
	ENGINE REVERSING GEAR								
	LUBRICATING OIL PUMPS								
	OIL FUEL TRANSFER PUMP								
	WINDLASS								
	WINCHES, FORWARD								
	WINCHES, AFT								
	STEERING GEAR								
	WORKSHOP MOTOR	1	.01	4	.044	30	60 ft	V.I.R.	P.C.A. Braided
	VENTILATING FANS								

All Conductors are of annealed copper conforming to British Standard Specification No. 7.

The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.

The foregoing is a correct description.

per pro. THE SUNDERLAND FORGE & ENGINEERING CO., LTD.

Electrical Engineers.

Date 13th October 1922.

COMPASSES.

Distance between electric generators or motors and standard compass 134 feet

Distance between electric generators or motors and steering compass 126 feet

The nearest cables to the compasses are as follows:—

A cable carrying 11.5 Ampères 4 feet from standard compass 11 feet from steering compass.

A cable carrying .6 Ampères 7 feet from standard compass led into ~~from~~ steering compass.

A cable carrying .6 Ampères led into ~~from~~ standard compass 7 feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power Yes.

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted Yes.

The maximum deviation due to electric currents was found to be Nil degrees on any course in the case of the standard compass, and Nil degrees on any course in the case of the steering compass.

LITHGOWS LIMITED.

W. J. Allan

Director & Secretary Builder's Signature.

Date 16th Oct 1922.

Is this installation a duplicate of a previous case No If so, state name of vessel

General Remarks (State quality of workmanship, opinions as to class, &c.)

This installation has been fitted on board under special survey. Tested under full working conditions and found satisfactory. The workmanship in all respects was found to be good.

It is submitted that this vessel is eligible for THE RECORD.

Elec. Light. J.S.R. 7/11/22

Total Capacity of Generators 39 Kilowatts

The amount of Fee ... £ 24 : 15. : When applied for, 19

Travelling Expenses (if any) £ - : : When received, 18/10/22

J.S. Rankin Surveyor to Lloyd's Register of Shipping.

Committee's Minute GLASGOW 31 OCT 1922

Assigned Elec. Light. J.S.R.

Im 3.22.—Transfer. (The Surveyors are requested not to write on or below the space for Committee's Minute.)

31.10.22



Fitted for oil fuel 10,22 J.P. above 150° F