

LLOYD'S REGISTER OF SHIPPING

Index No. _____
(For London Office only.)

UNITED WITH THE BRITISH CORPORATION REGISTER


SURVEYS FOR FREEBOARD.

46216

(CONDITIONS OF ASSIGNMENT.)

Ship's Name **MS. "ARGO DELOS"**Port of Survey **FLUSHING**Official Number **728**Surveyor's Signature *W. M. M. M.*Nationality and Port of Registry **GREEK - PIRAEUS.**Date of Survey **WHILE BUILDING.**

Disposition and dimensions of superstructures, trunks, deckhouses, machinery casings and wood sheathing to be inserted in the diagrams and tabular statement:—

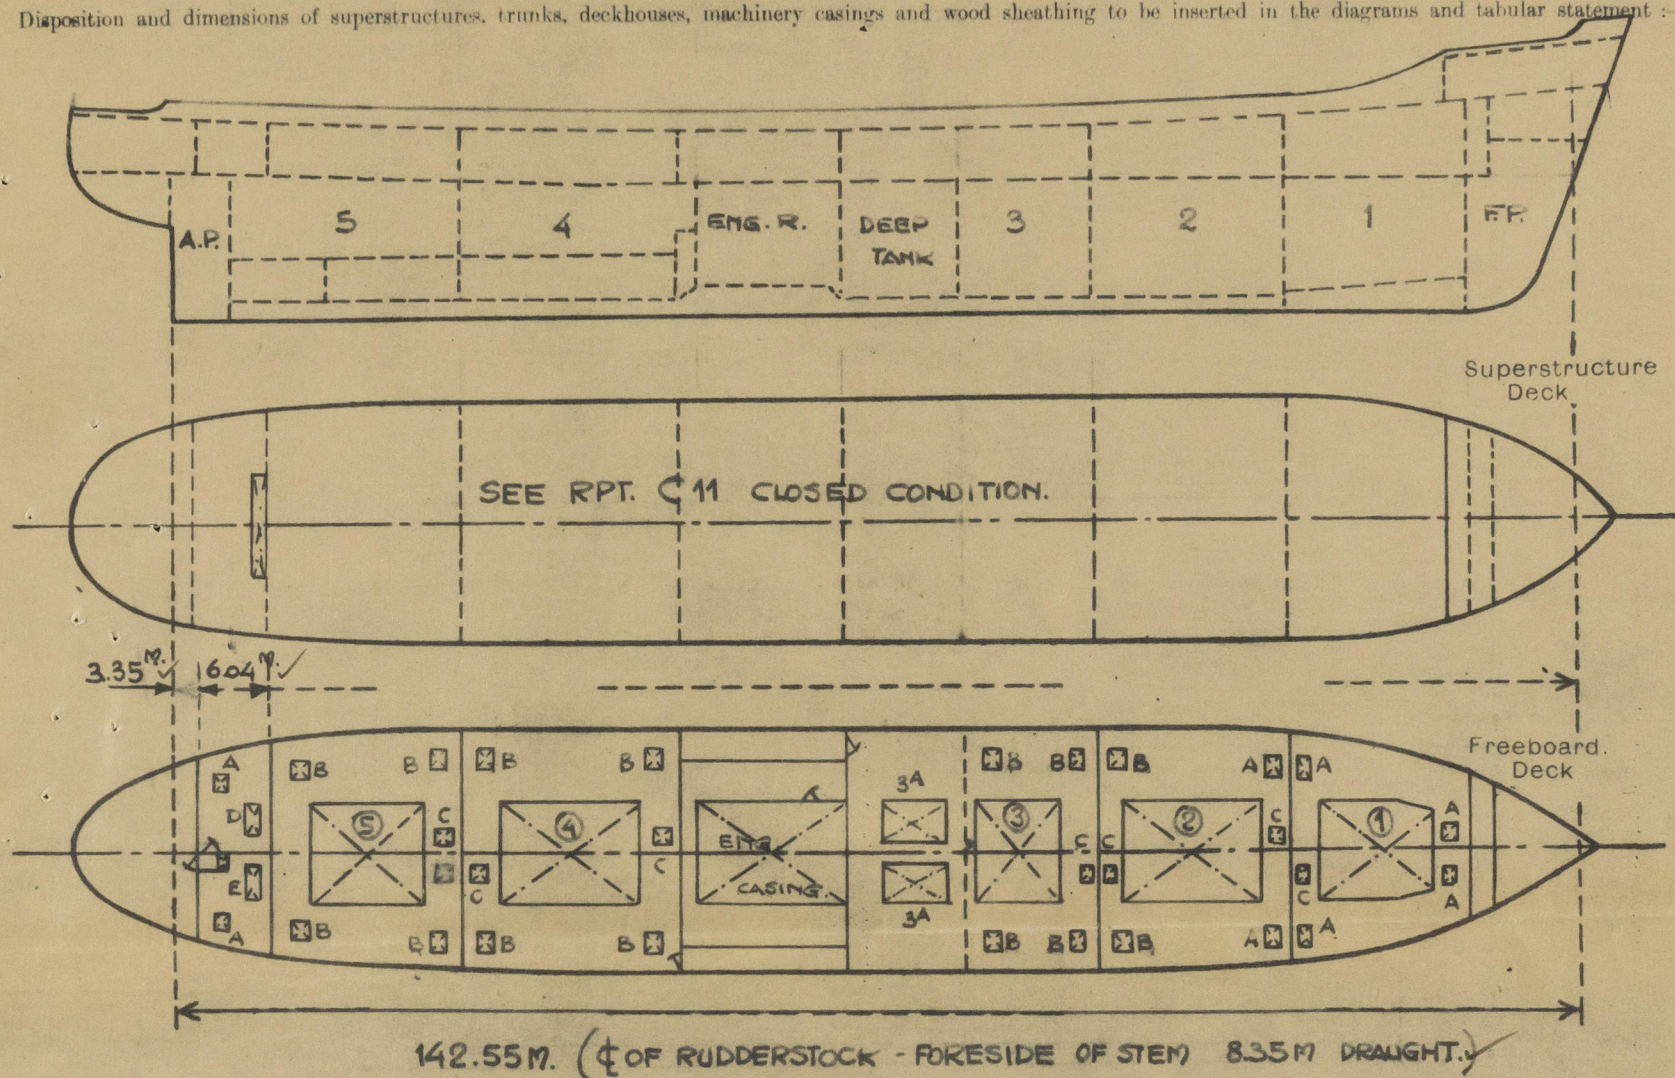


Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height, Beam to Beam
Poop Bulkhead FR. 5.. ✓	CORRUGATED ✓	7 ✓	7 ✓	✓	—	1550 x 700 ✓	470 ✓	
Raised Quarter Deck Bulkhead ...								
Bridge, After Bulkhead FR. 14.. ✓	CORRUGATED ✓	7 ✓	7 ✓	✓	—	NONE. ✓		
Bridge, Forward Bulkhead ...								
Forecastle Bulkhead ...								
Trunk, Aft ...								
Trunk, Forward ...								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...								
Exposed Machinery Casings on Superstructure Decks ...								
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	6 ✓	6 ✓	102 x 63 x 6.3 ✓	760 ✓	EL. W. ✓	1860 x 700 ✓	150 ✓	
Deckhouses and Pump Room Entrances								

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	HINGED STEEL W.T. DOOR, OPERABLE BOTH SIDES. ✓
Raised Quarter Deck Bulkhead ...	
Bridge, After Bulkhead ...	
Bridge, Forward Bulkhead ...	
Forecastle Bulkhead ...	
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	
Exposed Machinery Casings on Superstructure Decks ...	
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	HINGED STEEL DOOR, OPERABLE BOTH SIDES. ✓
Deckhouses and Pump Room Entrances	

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD DECKS.											
Description of Hatchway		1	2	3	4	5	2x 3A	A	B	C	D. E.
Dimensions of Hatchway		1062g x 7600	12875 x 7500	8000x 7500	12895 7500	10614 x 7500	3670 x 3085	670 x 670	750 x 750	620 x 620	1320x 610
COAMINGS	Height above Deck	254	254	254	254	254	102	76	76	60	65
	Thickness	Sides 10.2	10.2	10.2	10.2	10.2	12.	10.0	10.0	10.0	10.0
		Ends 10.2	10.2	10.2	10.2	10.2	12.5	10.0	10.0	10.0	10.0
	Stiffeners	Sides	-	-	-	-	-	-	-	-	-
Brackets, Stays	Ends	-	-	-	-	-	-	-	-	-	-
HATCH BEAMS	Number	7	9	5	9	7	1	-	-	-	-
	Spacing	1327	1288	1333	1283	1326	-	-	-	-	-
	Scantling and Sketch										
	Bearing Surface	A = 600x15 / 530x15 / 610x14.5 / 610x14.5 / 610x14.5 B = 250x28 / 250x28 / 190x25.7 / 190x25.7 / 130x25.7									
FORE AND AFTERS	Number	/									
	Spacing										
	Unsupported Lengths										
	Scantling* and Sketch										
Bearing Surface	/										
HATCH COVERS	Material	PINE	PINE	PINE	PINE	PINE	HINGED STEEL W.T. COVERS . 9"m, STIFFENED BY 152x127 (746 SPACING F.3A) AND P.28x36 (893 SPACING AT WARTH) CLOSED BY 1/2" BOLTS - 4 1/2" APART. PLANHOLE OR COVER 18-1/4" BOLTS. COVER 13"m.				
	Thickness	90	90	90	90	90	HINGED STEEL W.T. COVER				
	How fitted	F. & A.	F. & A.	F. & A.	F. & A.	F. & A.	7 1/2 mm THICK RUBBER				
	Bearing Surface	120	120	90	90	90	PACKING . 2-7/8" TUGGLES.				
Spacing of Cleats		MAX. 2'-0"									
Number of Tarpaulins		NOT PROVIDED									
<p>*Are wood fore and afters steel shod at all bearing surfaces? NOT FITTED.</p> <p>Are battens and wedges efficient and in good condition? NOT PROVIDED.</p> <p>Are tarpaulins in good condition and in accordance with rule requirements? NOT PROVIDED.</p> <p>Are lashings provided in accordance with rule requirements? NOT PROVIDED.</p> <p>Are wood covers fitted with galvanised end bands? YES.</p>											

Particulars of any special features:— (Timber Deck-cargo Fittings, Skylights, Sewage Systems, Ash Ejectors, Rubbish Shoots, etc.)

IN TONNAGE WELL AFT. P 2 S 1-5" S.D.N.R.V. OPERABLE FROM SHELTER DECK AND PROVIDED WITH OPEN-SHUT INDICATOR AND LEADING OVERBOARD JUST BELOW FREEBOARD DECK. OPENING IN SHELL NOW CLOSED BY PLATE (14 7/8") WELDED TO SHELL.

P. & S. 5 SCUPPERS FROM FREEBOARD DECK TO BILGES (2") PROVIDED WITH S.D. VALVE, OPERABLE FROM SHELTER DECK AND PROVIDED WITH OPEN-SHUT INDICATOR VALVES HAVE NOW BEEN SECURED IN OPEN POSITION AND SCREW DOWN GEAR DISCONNECTED.



© 2020

Lloyd's Register Foundation