

8 JUL 1941

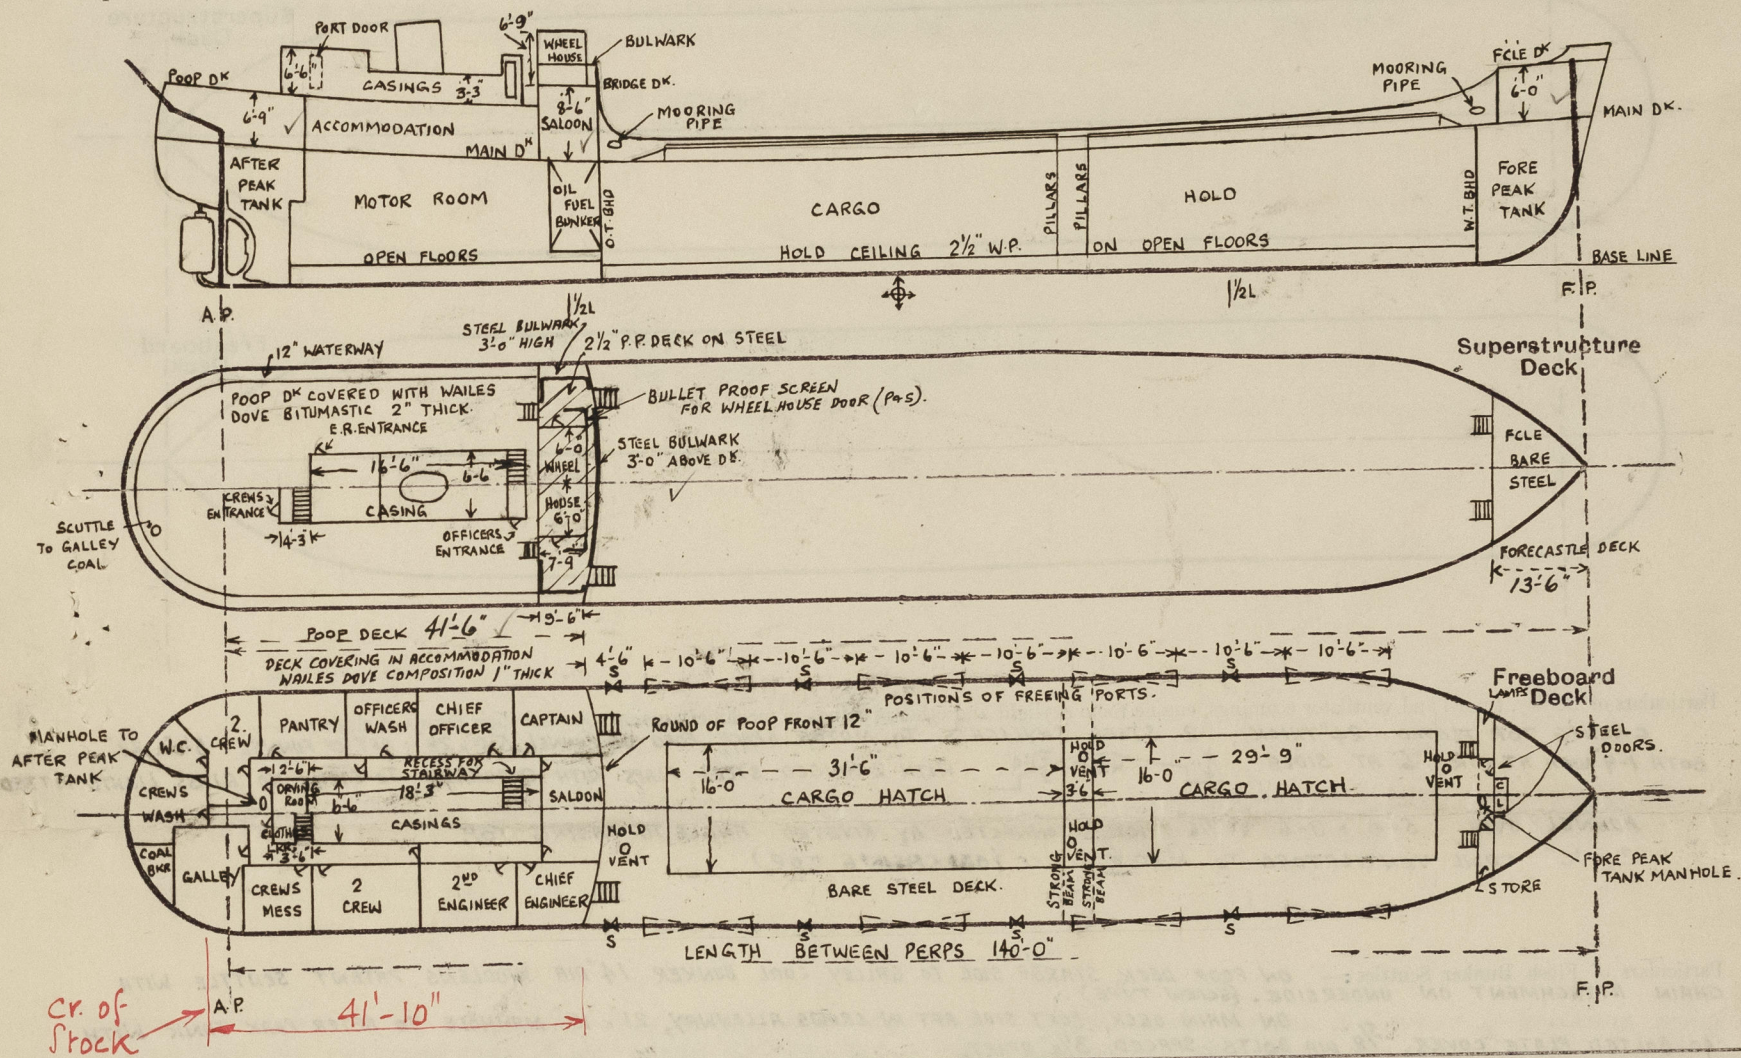
Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

Ship's Name **MOTOR COASTER "EMPIRE BANK"** Port of Survey **HULL**
 Official Number **167107.** Surveyor's Signature *Monald.*
 Nationality and Port of Registry **BRITISH HULL** Date of Survey **WHILE BUILDING AND AFLOAT.**

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—



Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	✓	.30	5 x 3 x .30 BA	30	LUGS TOP & BOTTOM 3 x 3 x .30" 3-3/4" R. EACH WAY	NONE	✓	8'-6" ✓
Raised Quarter Deck Bulkhead ...	✓	✓	✓	✓	✓	✓	✓	✓
Bridge, After Bulkhead ...	✓	✓	✓	✓	✓	✓	✓	✓
Bridge, Forward Bulkhead ...	✓	✓	✓	✓	✓	✓	✓	✓
Forecastle Bulkhead ...	✓	.30 CENTRE .24 SIDE	3" FLANGES	30	✓	1 STEEL DOOR PORT AND 1 STARBOARD 4'-2" x 22"	18"	6'-0" ✓
Trunk, Aft ...	✓	✓	✓	✓	✓	✓	✓	✓
Trunk, Forward ...	✓	✓	✓	✓	✓	✓	✓	✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓	✓	✓	✓	✓	✓	✓	✓
Exposed Machinery Casings on Superstructure Decks ... ON POOP DECK	✓	.26	3 x 2 1/2 x .26	28	KNEES AT TOP	4'-10" x 23"	15"	6'-6" AND 3'-3" ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓	✓	✓	✓	✓	✓	✓	✓
Deckhouses on Flush Deck Ships ...	✓	✓	✓	✓	✓	✓	✓	✓


Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	NO OPENINGS ✓
Raised Quarter Deck Bulkhead ...	✓
Bridge, After Bulkhead ...	✓
Bridge, Forward Bulkhead ...	✓
Forecastle Bulkhead ...	1 DOOR PORT AND 1 STARBOARD STEEL HINGED DOORS WITH SPRING LOCKS, HANDLES BOTH SIDES. ✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓
Exposed Machinery Casings on Superstructure Decks ... POOP DECK	E.R. ENTRANCE PORT SIDE STEEL DOOR 4'-11" x 1'-11" SPRING LOCK AND HANDLES BOTH SIDES. OFFICERS' ENTRANCE ON STARBOARD SIDE STEEL DOOR 4'-11" x 1'-11" SPRING LOCK AND HANDLES BOTH SIDES. CREWS' ENTRANCE IN AFT END STEEL DOOR 4'-11" x 1'-11" SPRING LOCK AND HANDLES BOTH SIDES. ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	NO OPENINGS ✓
Deckhouses on Flush Deck Ships ...	✓

EMPIRE BANK

Particulars of Gangway Cargo and Coaling Ports :—

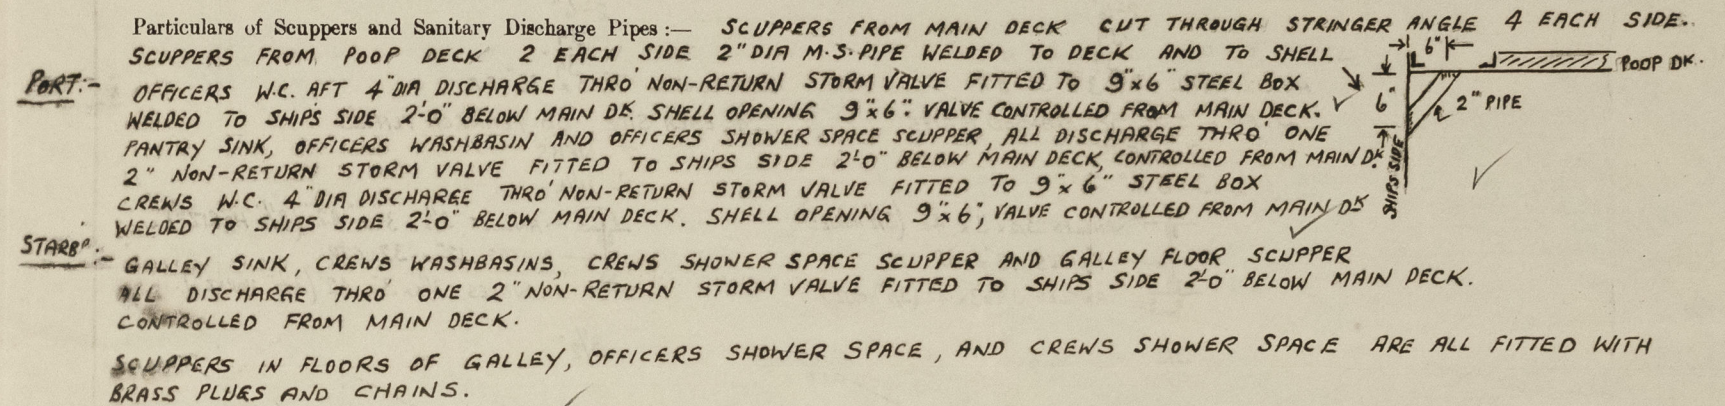NONE FITTED




FUNNEL OVAL 5'-0" x 3'-6" x 3/16" THICK. CONNECTED BY RIVETED ANGLE TO CASING TOP.
2-10" COWL VENTILATORS TO MOTOR SPACE (ON CASING TOP.)

Particulars of Companionways :—

ENTRANCE TO OFFICERS' ACCOMMODATION BY STEEL DOOR IN STARBOARD SIDE OF CASING FORD, ON POOP DECK.
ENTRANCE TO ENGINE ROOM BY STEEL DOOR IN PORT SIDE OF CASING AFT, ON POOP DECK.
ENTRANCE TO CREWS' QUARTERS BY STEEL DOOR IN AFT END OF CASING, ON POOP DECK.
ALL DOOR COAMINGS 15" HIGH. ✓

CANVAS COVERS AND WOOD PLUGS SUPPLIED TO ALL
COWL VENTILATOR COAMINGS

PEAK TANK AIR PIPES SUPPLIED WITH WOOD
PLUGS AND CHAIN AND $\frac{3}{8}$ " SNIFFING HOLES
DRILLED IN BEND OF GOOSE NECKS.



IN POOP SIDES TO ACCOMMODATION 10 IN PORT SIDE, 8 IN STARB^d SIDE 10" CLEAR GLASS
ALSO 4 IN POOP FRONT 10" CLEAR GLASS.
ALL SCUTTLES OF BRASS OF STRONG CONSTRUCTION AND FITTED WITH DEADLIGHTS.

Vertical distance of Sill of lowest Side Scuttle above top of keel

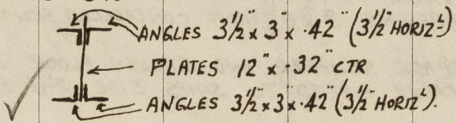
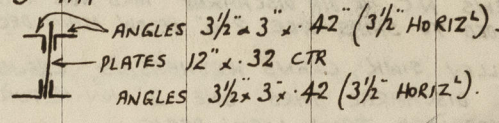
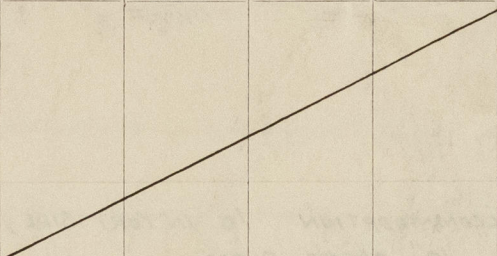
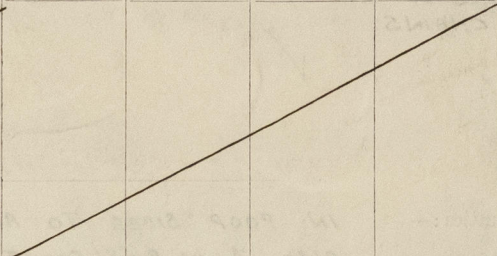
Particulars of Gangways, Lifelines, etc. :- GANGWAY FROM FORECASTLE LADDER TO CARGO HATCH TOP AND GANGWAY FROM POOP FRONT LADDER TO CARGO HATCH TOP. ✓
LIFELINE OF 1 1/2" WIRE ROPE WITH STRETCHING SCREW SECURED TO EYEPLATES ON POOP AND FORECASTLE ENDS.

State position of each freeing port ... *MAIN DECK*
(F. and A. position and height above deck edge) { *Forward Well :- POSITIONS AS PER SKETCH ON PAGE 1.*
BOTTOM EDGE OF OPENINGS 8" ABOVE DECK.

State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such:— *OPENINGS. BULWARK PLATING FLANGED ON UPPER EDGE OF FREEING PORTS.*

Additional area where sheer is less than standard.

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.										
Description of Hatchway			N ^o 1 HATCH MAIN DECK			N ^o 2 HATCH MAIN DECK				
Dimensions of Hatchway			29'-9" x 16'-0" ✓			31'-6" x 16'-0"				
COAMINGS	{	Height above Deck	2'-6"			2'-6"				
		Thickness	Sides	.39			.39			
			Ends	.39			.39			
		Stiffeners	HORIZONTAL 7" x 3" x .36" B.A. ✓			HORIZONTAL 7" x 3" x .36" B.A.				
		Brackets, Stays	3 EACH SIDE .30 FLANGED PLATES			4 EACH SIDE .30 FLANGED PLATES ✓				
HATCH BEAMS	{	Number	7 WEBS			7 WEBS				
		Spacing	3'-8 ⁵ / ₈ "			3'-11 ¹ / ₄ "				
		Scantling and Sketch								
			Bearing Surface	3 ¹ / ₂ "			3 ¹ / ₂ " ✓			
FORE AND AFTERS	{	Number								
		Spacing								
		Unsupported Lengths								
		Scantling* and Sketch								
		Bearing Surface								
HATCH COVERS	{	Material	WHITE PINE WITH STEEL END SHOES			WHITE PINE WITH STEEL END SHOES				
		Thickness	2 ³ / ₈ "			2 ³ / ₈ "				
		How fitted	FORE AND AFT ✓			FORE AND AFT ✓				
		Bearing Surface	3" ✓			3" ✓				
Spacing of Cleats			24"			24"				
Number of Tarpaulins			2 ✓			2 ✓				

*Are wood fore and afters steel shod at all bearing surfaces? ✓ YES
Are battens and wedges efficient and in good condition? YES
Are tarpaulins in good condition and in accordance with rule requirements? YES
Are lashings provided in accordance with rule requirements? YES 4 LOCKING BARS
2"x 3/8" FLAT BARS WITH HASPS AND PADLOCKS AND 2 SPECIAL LASHINGS TO EACH SECTION OF COVERS. ✓

YES YES YES 4 LOCKING BARS
2"x 3/8" FLAT BARS WITH HASPS AND PADLOCKS AND 2 SPECIAL LASHINGS TO EACH SECTION OF COVERS. ✓

Particulars of any special features:—

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.



© 2020

Lloyd's Register
Foundation