

## Lloyd's Register of Shipping.


## "CLOVELLY" SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

No. 18644

Ship's Name *EMPIRE CAICOS*Port of Survey *West Hartlepool.*Official Number *+80082 3707-KJ.*Surveyor's Signature *W. J. Craig.*Nationality and Port of Registry *British West Hartlepool.*Date of Survey *April 1945.*

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:

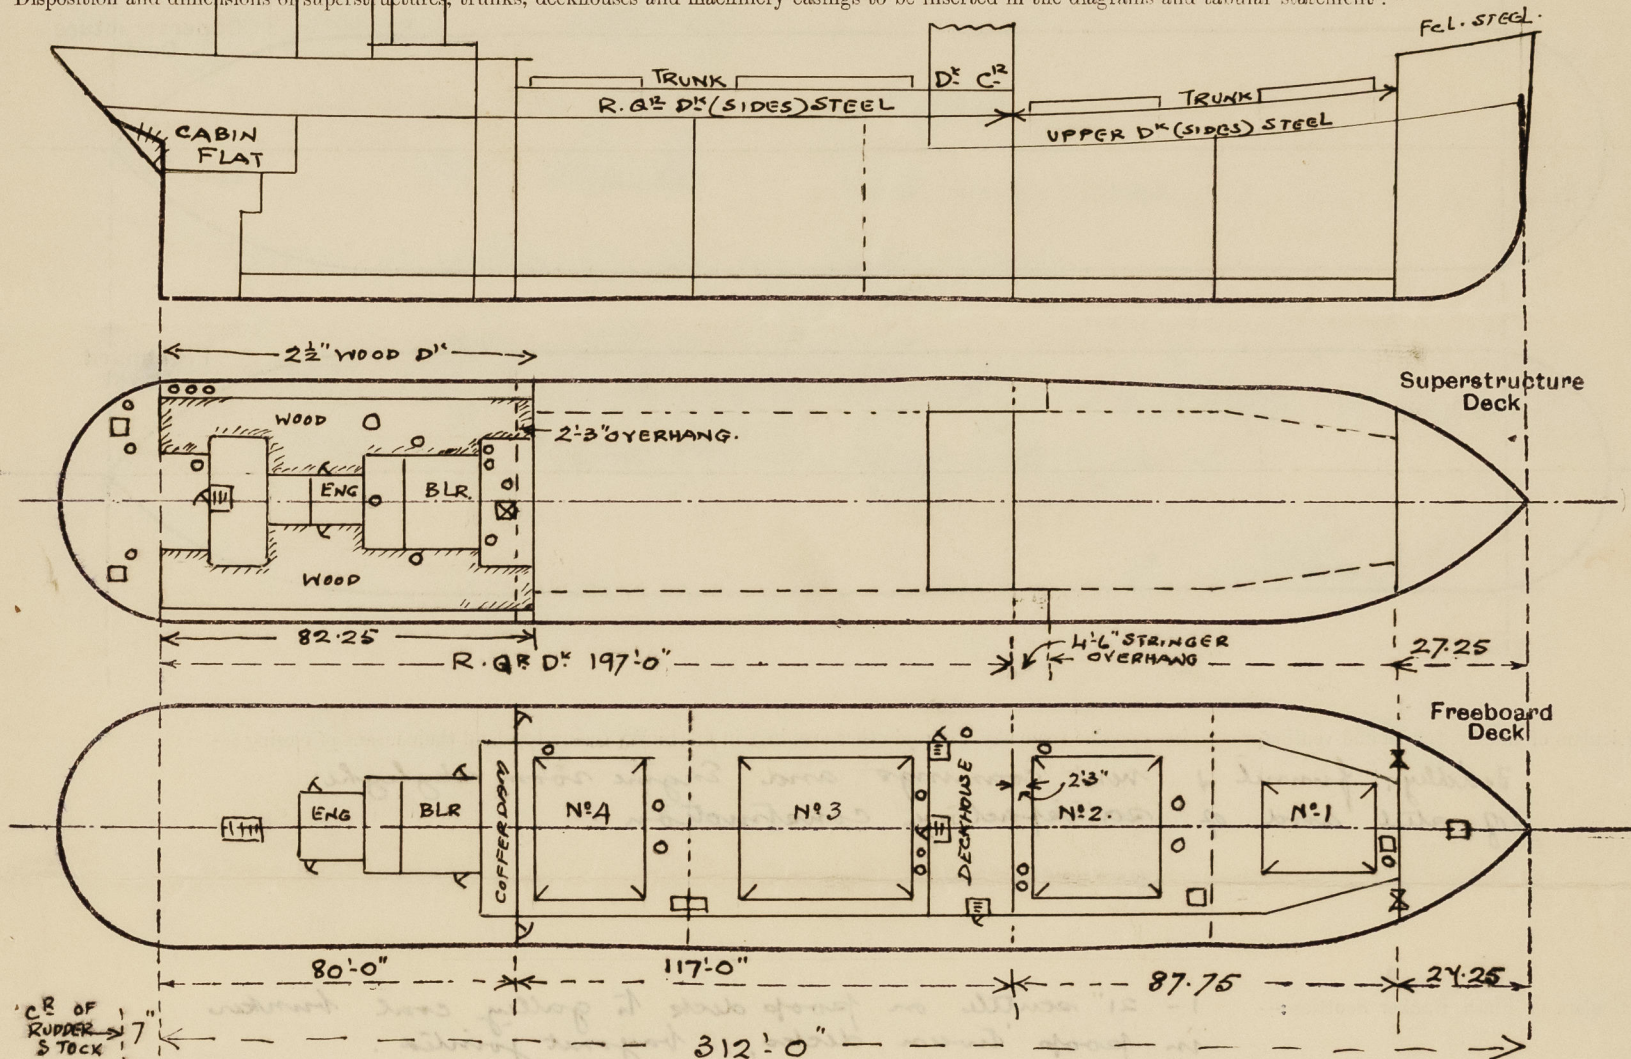

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...		35 1/4 x 42 3/4	8 x 3 x 38 1/2	36"	lugged brackets	2 at 4'-6" x 2'-6"	24"	7'-6"
Raised Quarter Deck Bulkhead ...		39 3/4 x 40 3/4	6 x 3 1/2 x 34 1/2	28 1/2"	lugged brackets	none	✓	4'-10"
Bridge, After Bulkhead ...				✓				
Bridge, Forward Bulkhead ...				✓				
Forecastle Bulkhead ...		26	8 x 2 1/2 x 30 L	28 1/4"	none	2 at 5'-0" x 2'-0"	18"	7'-0"
Trunk, Aft ...		44	3 x 3 x 34 1/4 x 35	54"	large brackets using fourth frame	✓	✓	2'-9"
Trunk, Forward ...		44	3 1/2 x 3 x 34 1/4 x 35	27"	large brackets using fourth frame	✓	✓	4'-10"
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...				✓				
Exposed Machinery Casings on Superstructure Decks ...	34	30	3 x 3 x 30 L	27"	none	2 at 5'-0" x 1'-9"	18"	7'-9"
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...				✓				
Deckhouses on Flush Deck Ships ...				✓				

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	W.T. Hinged steel doors operated from both sides
Raised Quarter Deck Bulkhead ...	no openings.
Bridge, After Bulkhead ...	✓
Bridge, Forward Bulkhead ...	✓
Forecastle Bulkhead ...	Hook bolted plates
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓
Exposed Machinery Casings on Superstructure Decks ...	1 1/8" hinged wood doors operated from both sides
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓
Deckhouses on Flush Deck Ships ...	✓







PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.											
← UPPER DECK → R. Q. DECK → FCL → POOP D' →											
Description of Hatchway	N° 1	N° 2	ESCAPE MATCHES	To P.P. STORE INSIDE FELE	N° 3	N° 4	ESCAPE HATCH	To STORE	To PUMP ROOM	To STORE	To MAG.
Dimensions of Hatchway	24'9" x 20'0"	24'9" x 26'0"	2'8" x 2'6" 2'8" x 2'0"	4' x 3'	40'6" x 26'0"	22'6" x 26'0"	4'9" x 2'0"	2'0" x 2'0"	2'3" x 2'3"	2'0" x 2'0"	2'0" x 2'0"
COAMINGS	Height above Deck ...	12'3 1/2" x 4'5" ON TRUNK TOP	9'3 1/2" x 4'4" ON TRUNK TOP	9'3 1/2" x 3'5" ON UPPER DECK	12'3 1/2" x 4'5" ON TRUNK TOP	9'3 1/2" x 4'4"	18" x 35"	18" x 35"	18" x 35"	18" x 35"	18" x 35"
HATCH BEAMS	Number	4	4		6	3					
	Spacing	4'11 1/2"	4'11 1/2"		5'9 1/2"	5'7 1/2"					
	Scantling and Sketch	18" x 36	21" x 34		18 1/2" x 36	17 1/2" x 36					
		4 x 3 x 4 1/4 T + B	5 x 3 1/2 x 5 1/2 T + B		5 x 3 1/2 x 5 1/2 T + B						
	Bearing Surface	4 1/2	4 1/2		4 1/2	4 1/2					
FORE AND AFTERS	Number										
	Spacing										
	Unsupported Lengths										
	Scantling* and Sketch										
	Bearing Surface										
HATCH COVERS	Material	Wood	wood	wood	wood	wood	wood	Efficient W.T. hinged steel cover	Efficient W.T. hinged steel cover	wood	Efficient W.T. hinged steel cover
	Thickness	3"	3"	3"	3"	3"	3"			3"	
	How fitted	F + A	F + A	ath	F + A	F + A	ath			ath	
	Bearing Surface	3"	3"	2 1/2"	2 1/2"	3"	2 1/2"			2 1/2"	
Spacing of Cleats	24"	24"	21" - 24"	20"	24"	24"	24"			15"	
Number of Tarpaulins	2	2	2 - 2	1	2	2	2			2	
*Are wood fore and afters steel shod at all bearing surfaces? <input checked="" type="checkbox"/>											
Are battens and wedges efficient and in good condition? <input checked="" type="checkbox"/>											
Are tarpaulins in good condition and in accordance with rule requirements? <input checked="" type="checkbox"/>											
Are lashings provided in accordance with rule requirements? <input checked="" type="checkbox"/>											
Locking bars fitted to Nos 1, 2, 3, 4, 5 Hatchways.											

Particulars of any special features: — Deeper loading endorsement required.

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.



© 2020

Lloyd's Register Foundation