

2 FEB 1950


# Lloyd's Register of Shipping.

## SURVEYS FOR FREEBOARD.

### (CONDITIONS OF ASSIGNMENT.)

Index No. 42128  
(For London Office only.)Ann. Rpt. No. 22799.Ship's Name LANARKBROOKPort of Survey Aberdeen.Official Number 183210Surveyor's Signature G. A. WilsonNationality and Port of Registry British, London.Date of Survey Whilst building.

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

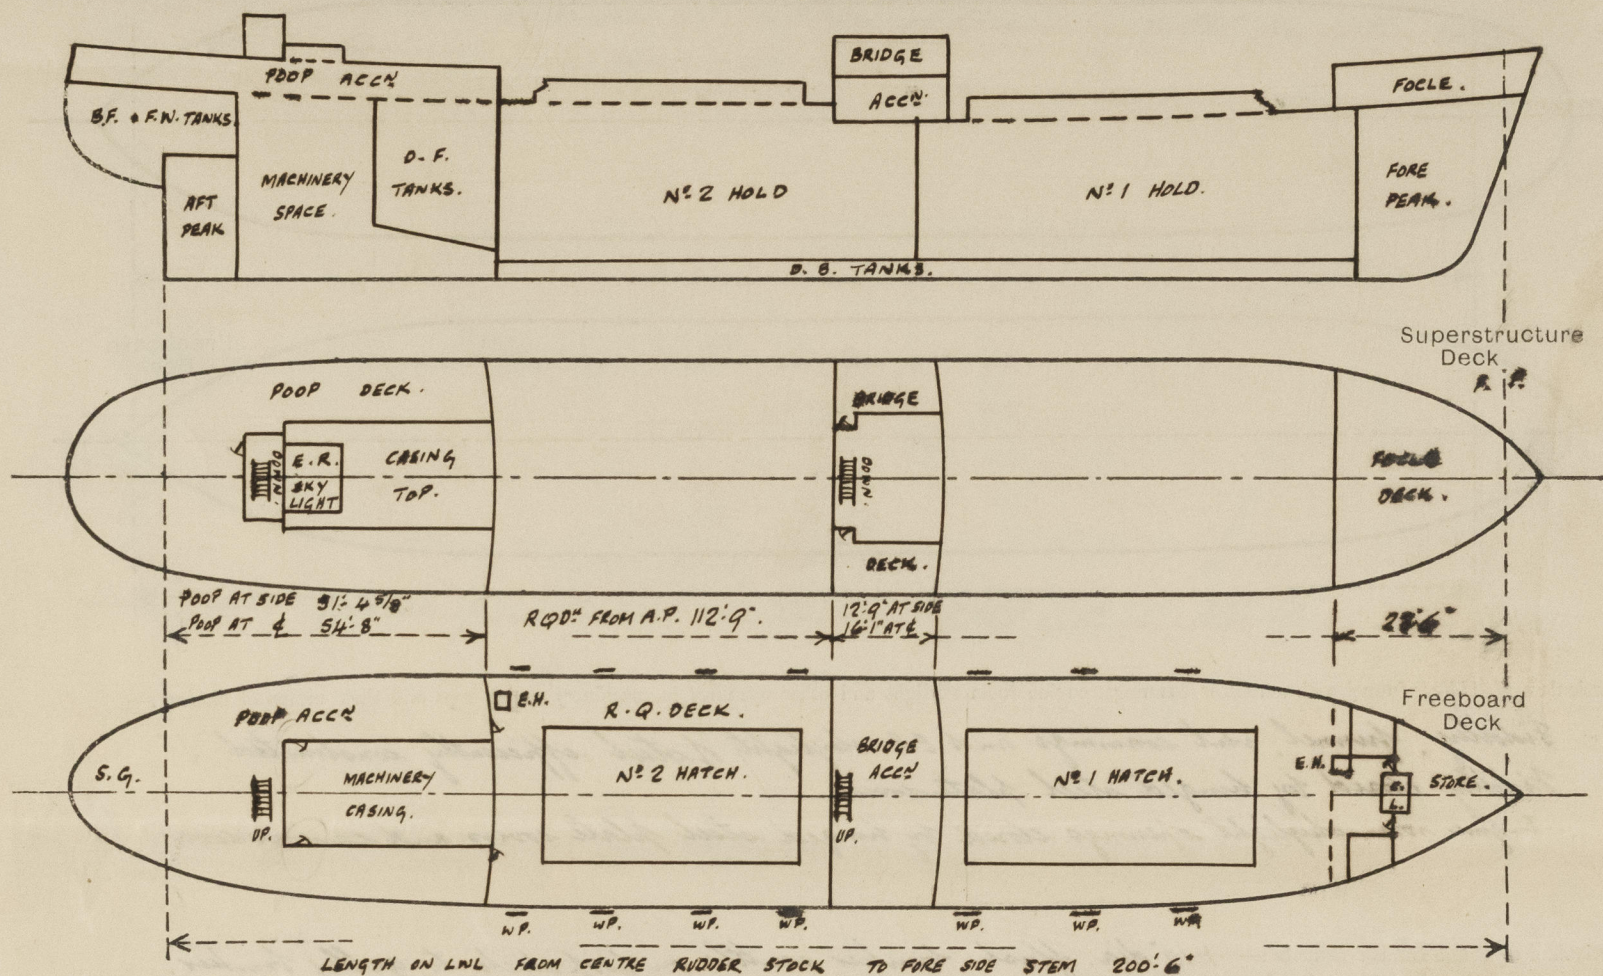

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	30	30	6 1/2 x 3 x 34 BA.	30"	NONE	4' 6" x 2' 0"	18"	7' 3"
Raised Quarter Deck Bulkhead ...	30	30	3 x 3 x 30	30"	NONE	INTACT		4' 0"
Bridge, After Bulkhead ...	30	30	3 x 3 x 30	30"	NONE	"		7' 0"
Bridge, Forward Bulkhead ...	30	30	7 x 3 x 34 BA.	30"	LUGS TOP & BOTTOM	"		7' 0"
Forecastle Bulkhead ...	28	28	3 x 3 x 30	36"	NONE	4' 6" x 2' 4"	18"	7' 0"
Trunk, Aft ...	✓							
Trunk, Forward ...	✓							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	30	30	6 1/2 x 3 x 34 BA.	26"	NONE	INTACT.		7' 3"
Exposed Machinery Casings on Superstructure Decks ...	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓							
Deckhouses on Flush Deck Ships ...	✓							

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	Steel watertight doors 1 1/4" thick capable of being manipulated from both sides.
Raised Quarter Deck Bulkhead ...	Intact
Bridge, After Bulkhead ...	"
Bridge, Forward Bulkhead ...	"
Forecastle Bulkhead ...	Steel doors 28 thick capable of being manipulated from both sides.
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	Intact
Exposed Machinery Casings on Superstructure Decks ...	✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓
Deckhouses on Flush Deck Ships ...	✓







# PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.						
Description of Hatchway		No. 1.	No. 2.	ESCAPE	HATCHES.	
				No. 1.	No. 2.	
Dimensions of Hatchway		37'6" x 19'6"	43'6" x 19'6"	2'0" x 1'10"	2'0" x 1'10"	
COAMINGS	Height above Deck	4'0"	4'0"	2'0"	1'6"	
	Thickness { Sides	.44	.44	.26	.26	
	{ Ends	.44	.44	.26	.26	
	Stiffeners	10 x 3 1/2 x 45	10 x 3 1/2 x 45 B1.	✓	✓	
	Brackets, Stays	SPACED 7'4" APART.	34 3" FL.	34 3" FL.	✓	✓
HATCH BEAMS	Number	18	18			
	Spacing	2'3 1/4" - 2'3 1/4"	2'7 1/4" - 2'8 1/4"			
	Scantling and Sketch	WEBS 9 1/4" x 30	WEBS 9 3/4" x 30			
		FLANGE 7 x 4 8	FLANGE 7 x 4 4	None.		
	Bearing Surface	3 x 4 8	3 x 4 4			
FORE AND AFTERS	Number					
	Spacing					
	Unsupported Lengths					
	Scantling and Sketch					
	Bearing Surface					
HATCH COVERS	Material	STEEL	STEEL	WOOD	WOOD	
	Thickness	.29	.27	2 1/2"	2 1/2"	
	How fitted	MCGREGOR	PATENT	THURTELL	THURTELL	
	Bearing Surface	HATCH	COVERS	1 1/2"	1 1/2"	
Spacing of Cleats		3'3"	3'3"	12"	12"	
Number of Tarpaulins		✓	✓	2	2.	

\*Are wood fore and afters steel shod at all bearing surfaces? *yes.*  
 Are battens and wedges efficient and in good condition? *yes.*  
 Are tarpaulins in good condition and in accordance with rule requirements? *yes.*  
 Are lashings provided in accordance with rule requirements? *None.*

Particulars of any special features:—

*Particulars of displacement etc. received from builders.*

Mean Mld Draft	Mld Draft	Ext Draft.	Tons per inch
13'6"	1825	1841	12.72.
14'0"	1902	1919	12.80.
14'6"	1979	1996.	12.88.

*This vessel is intended for coasting trade.*

*Timber freeboard not required.*

*The particulars given herewith are as proposed and completion of same will be advised with Verification of Marking form.*

*Plans of Midship Section, Profile & Decks, Hatches and McGregor Patent Hatch covers are enclosed for reference.*



© 2020

Lloyd's Register  
Foundation