

Lloyd's Register of Shipping.

M200

S.S. "CITY OF BARCELONA"

168748


Ship's Name

Official No.

Memorandum of alterations ~~in connection with the conversion of carriage of oil fuel for bunker purposes.~~

XX
XX

Superstructure(Weather)Deck. Port and Star'bd Bunker hatch and trimming hatch coamings removed and openings plated over using 5/8" plate and attached by rivetting, accomodation deck house P&S extended 1'4" for'd now partially covering origin bunker hatches. Saddle back of bunker completely removed and superstructure deck in way now plated over to form small galley coal bunker using original coaming and wooden covers on easing deck. 2-air pipes 4 1/2" dia. (from new settling tank in tween deck S.S.) now fitted and provided with wire gauze and canvas covers.

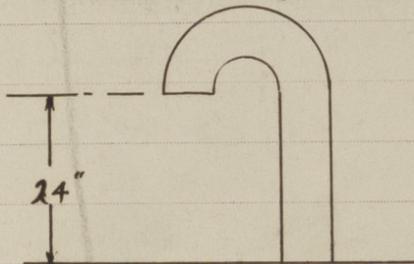

Freeboard Deck Port and Star'bd bunker hatches and trimming hatch coamings now removed and openings plated over using 5/8" plate and attached by rivetting. Boiler Casing P&S doors now permanently closed. Ash shoot openings in S.S. boiler casing, freeboard deck and shell plating now plated over.

Tonnage Well P&S Freeing ports now plated over and 1-5" Dia. scupper P&S filled leading overboard above freeboard deck with gunmetal, S.D.N.R.V. at ships side controlled from weather deck with open/shut indication.

W.R. Blackwood

Surveyor To Lloyds Register of Shipping,
United With The British Corporation Register.

LLOYD'S REGISTER OF SHIPPING
CALCUTTA.
20th Sept 1954
W.R.B. SURVEYOR.

ORIGINAL PLACED ON BOARD THE VESSEL

W.R.B.
14 OCT 1954