

CLASS CONTEMPLATED.

(LLOYD'S REGISTER.)

G.R. 130.
Lloyd's Register.

VESSELS OF 100 TONS AND UPWARDS.

These particulars are supplied by the Registrar General of Shipping and Seamen for the sole use of Lloyd's Register of British and Foreign Shipping.
Signal Letters (if any) L.G.M.S.

Official Number.		Name of Ship.		No., Date, and Port of Registry.	
162,487.		El Mirlo		191 in 1930 London.	
No., Date, and Port of Previous Registry (if any). -----					
Whether British or Foreign Built.	Whether a Sailing Steam, or Motor Ship, if Steam or Motor Ship how propelled.	Where Built.	When Built.	Name and Address of Builders.	
British	Motor Ship Single Screw.	Scotstoun Glasgow.	1930	Blythswood Shipbuilding Co., Ltd., Scotstoun, Glasgow.	
Number of Decks ...		Two		Length from fore part of stem, under the bowsprit, to the	
Number of Masts ...		Two		aft side of the head of the stern post	
Rigged		Fore & Aft.		Feet. 459	
Stern		Elliptical		Tenths. 7	
Build		Clincher		Length at quarter of depth from top of weather deck at	
Galleries		-----		side amidships to bottom of keel	
Head		-----		Feet. 458	
Framework and description of		Steel Cargo		Tenths. 5	
vessel		Eighteen		Main breadth to outside of planking	
Number of Bulkheads ...		Three		Feet. 60	
Number of water ballast tanks,		738.8 tons		Tenths. ---	
and their capacity in tons		-		Depth in hold from tonnage deck to ceiling at midships ...	
				Feet. 34	
				Tenths. 5	
				Depth in hold from upper deck to ceiling at midships, in the	
				case of three decks and upwards	
				Feet. 35	
				Tenths. 7.3	
				Depth from top of beam amidships to top of keel	
				Feet. 34	
				Tenths. 7	
				Depth from top of deck at side amidships to bottom of keel	
				Feet. 1	
				Tenths. 1.5	
				Round of beam	
				Feet. 74	
				Tenths. 8	
				Length of engine room, if any	

PARTICULARS OF DISPLACEMENT.

Total to quarter the depth from weather deck at side amidships to bottom of keel ... } 15860 Tons. Ditto per inch immersion at same depth ... } 55.4 Tons.

PARTICULARS OF PROPELLING ENGINES, &c. (if any).

No. of sets of engines.	Description of Engines.	Whether British or Foreign made.	When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N. H. P. B.H.P. I. H. P. Speed of Ship.
					No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Inverted Direct Acting Internal Combustion	Engines. British	Engines. 1930	Engines. J. G. Kincaid & Co., Ltd.	Eight 740 m/m	1500		---
	Particulars of Boilers.				4 stroke m/m			3220
	Description Donkey Cylindrical Multitubular Boilers.				single acting			4293
	Number Two	Boilers. British	Boilers. 1930	Boilers. Greenock	104 revs			11½ Knots
	Iron or Steel Steel				per min.			
	Loaded Pressure 180 lbs.							

PARTICULARS OF TONNAGE.



GROSS TONNAGE.		No. of Tons.	DEDUCTIONS ALLOWED.		No. of Tons.
Under Tonnage Deck ...		7421.35	On account of space required for propelling power		2588.03
Space or spaces between Decks...			On account of spaces occupied by Seamen or Apprentices, and appropriated to their use, and kept free from goods or stores of every kind, not being the personal property of the Crew		
Turret or Trunk ...			These spaces are the following, viz.:—		
Forecastle ... (Houses in)...		52.96	Forecastle, Poop, Round Houses & Side Houses		270.80
Bridge space ...		44.36	(Number of Seamen or Apprentices for whom accommodation is certified ... 47.....)		
Poop or Break ...		133.47	Deductions under Section 79 of the Merchant Shipping Act, 1894, and Section 54 of the Merchant Shipping Act, 1906, as follows:—		
Side Houses ...		124.76	Master's Accommodation 15.00		
Deck Houses ...		165.54	Chart Space 6.83		
Chart House ...			Wireless Telegraphy Space 5.28		
Spaces for machinery, and light, and air, under Section 78 (2) of the Merchant Shipping Act, 1894 ...		145.14	Boatswains Store 20.91		
Excess of Hatchways ...			Ballast Pump Space 20.91		
Gross Tonnage ...		8087.58	Water Ballast Space 230.14		
Deductions, as per Contra ...		3157.93	Total ...		3157.93
Register Tonnage ...		4929.65	Cubic Metres 22887.85		

NOTE 1.—The tonnage of the engine room spaces below the Upper Deck is 917.00 tons, and the tonnage of the total spaces framed in above the Upper Deck for propelling machinery and for light and air is 214.28 tons.

NOTE 2.—The undermentioned spaces above the Upper Deck are not included in the cubical contents forming the ship's register tonnage.

Forecastle L.41.4 - 26.98 tons. Open Space in Poop L.77.0 - 68.57 tons.
Bridge L.31.4 - 86.14 "
Open Space A.E. Bridge L.16.6 - 67.56 "
Passage on Bridge L.32.0 - 9.98 "

Name of Master	Certificate of { Service No. Competency No.
No. of Owners	
Name, Residence, and Description of Managing Owner if there are more owners than one.	
James Rennie of same address-Manager-.	
Lobitos Oilfields Limited 146, Dashwood House, Old Broad Street, London. E.C.2. Sixty-four Shares.	
Dated 19th September 1930.	
(5412) Wt. 2855/169 Gp. 144 2000 5-29 W & S Ltd.	

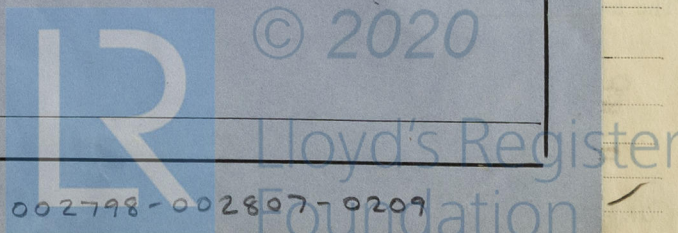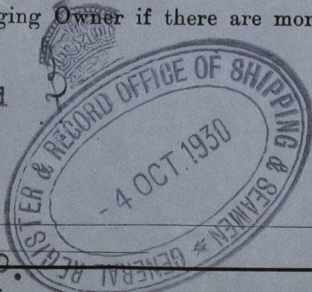

002798-002897-0209

Visits 136

15.16.17.18 100, lap welded or riveted longitudinal joint TR.D.B.S. Material S Range of tensile strength 28.32 Working pressure Actual 350