

28 MAY 1958

34572

Rpt. C. 11 (Contd.)

Index No. _____
(For London Office use)

LLOYD'S REGISTER OF SHIPPING

ALTERATIONS TO CONDITIONS OF ASSIGNMENT OF LOADLINES


Ship's Name "INVENTOR" Official No. 164267

Port of Registry Liverpool.

This ship has been under survey at Liverpool.

on 13th May, 1958 and the following alterations to the conditions of assignment of loadlines have now been effected/found:—


1. Small hatch on forecastle deck trunked to Fore Peak stow
Dimensions:— 24" x 28"
Coaming height:— 16"
Coaming thickness:— $\frac{3}{8}$ "
Cover:— M.S. secured watertight by means of rubber jointing and 30 bolts at $4\frac{1}{2}$ " centres
2. Hatch within forecastle leading to Fore Peak stow
Dimensions:— 36" x 36"
Coaming:— 9 x $3\frac{1}{2}$ " BA.
Cover:— $2\frac{1}{2}$ " W.W. fitted fore & aft, 3" bearing surface
Cleats:— 24" apart, 2 tarpaulins
3. Closing appliances. Openings in forecastle front fitted with storm boards in riveted channels instead of portable steel plates and hook bolts as reported.
Load line Certificates amended accordingly. ✓

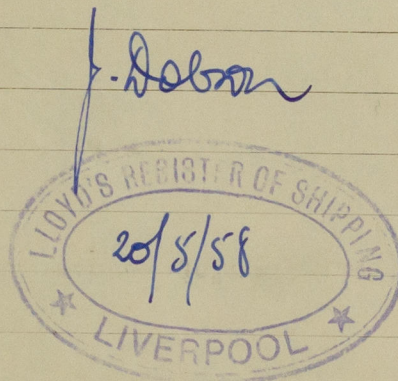

hoki
Thet.
13.6.58

A copy of this Report has been placed on board.

5m, 6, 56. T.



© 2021

Lloyd's Register
Foundation

003023-003028-0078