

26 OCT 1950

Rpt. C. 11.

# Lloyd's Register of Shipping.


## SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

Index No. 42552  
(For London Office only.)

Ship's Name AZUMAZAN MARU. Port of Survey TAMANO JAPAN.  
 Official Number \_\_\_\_\_ Surveyor's Signature G. Young.  
 Nationality and Port of Registry JAPAN. TOKYO Date of Survey Whilst Building.

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

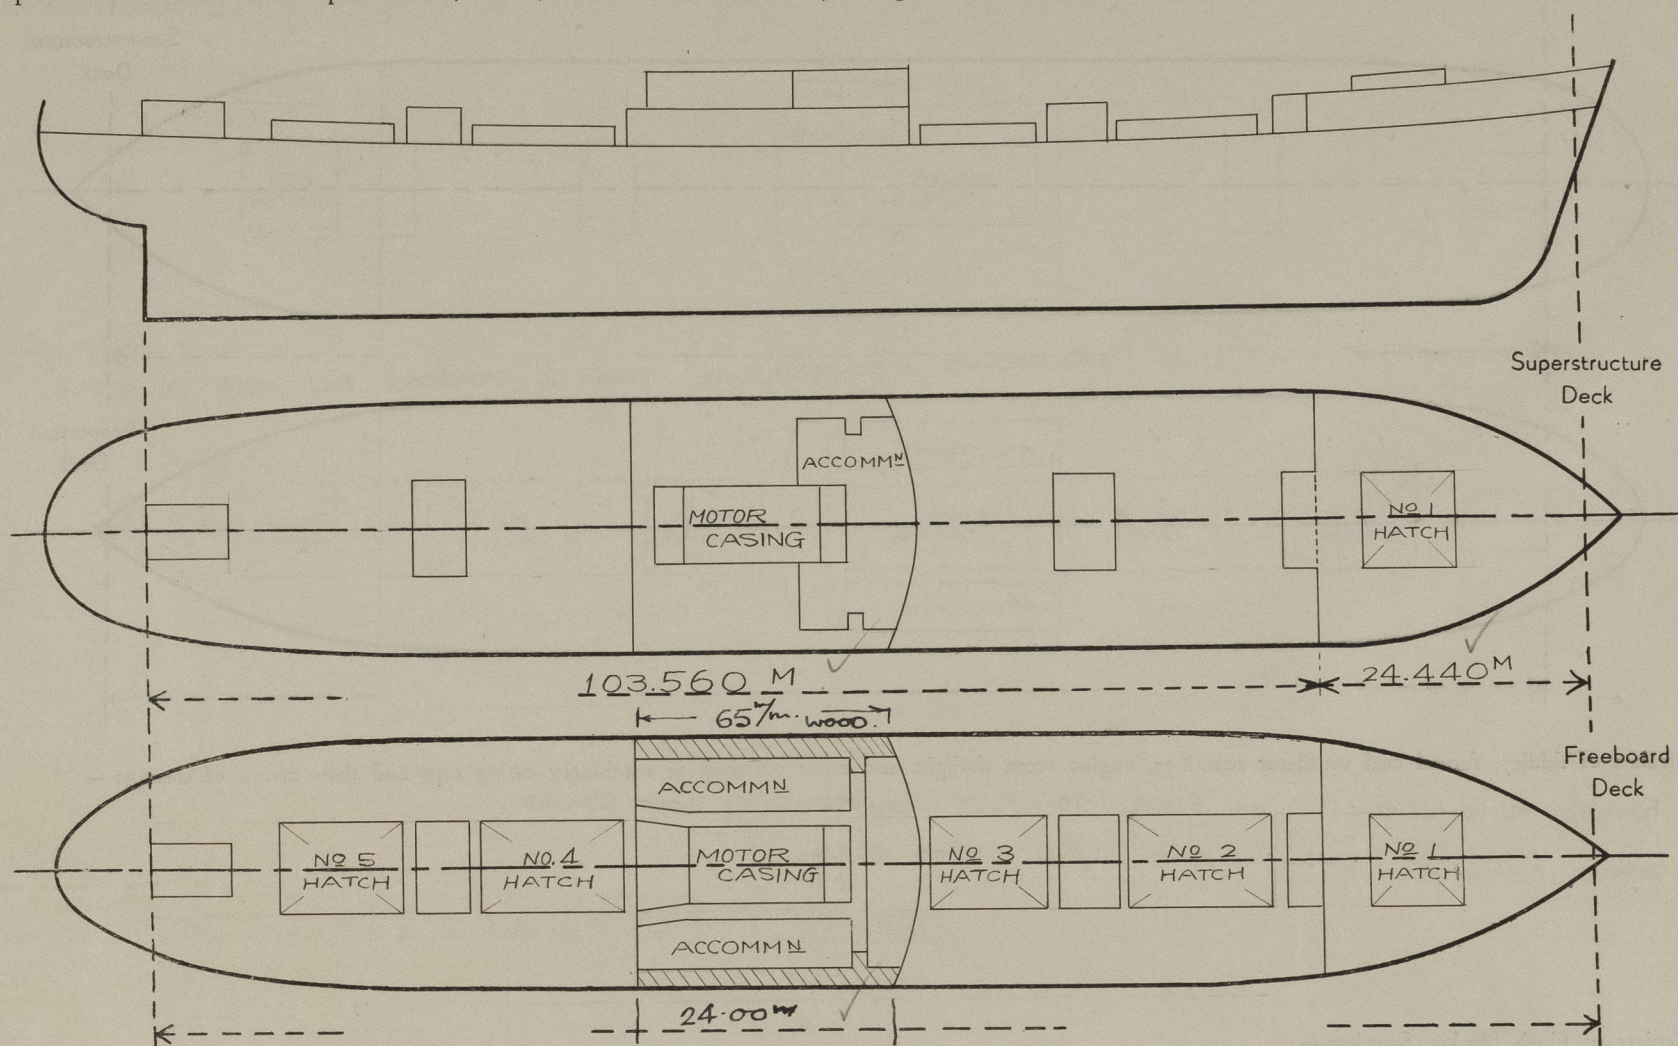

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	✓							
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead ...	7.	7.	90 x 9 F.B.	700 - 775.	NONE	1500 x 910.	460.	2.300
Bridge, Forward Bulkhead ...	11	11.	125 x 75 x 10. I	690.	BKT. TOP & BOTTOM	✓	✓	2.300.
Forecastle Bulkhead ...	8	8.	100 x 75 x 7.	700.	NONE	1500 x 915.	450.	2.400. ✓
Trunk, Aft ...	✓							
Trunk, Forward ...	✓							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓							
Exposed Machinery Casings on Superstructure Decks ...								
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	9.	7.	75 x 9. F.B.	750.	TOP. BKT.			
			100 x 75 x 7. (FRONT)	715.	BOTTOM. CONTINUOUS	1615 x 650.	300. ✓	2.300. ✓
Deckhouses on Flush Deck Ships ...	8.	7.	90 x 9. F.B. (SIDES)	915.	NONE	1365 x 760	544	2.200. ✓

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	✓
Raised Quarter Deck Bulkhead ...	✓
Bridge, After Bulkhead ...	✓
Bridge, Forward Bulkhead ...	✓
Forecastle Bulkhead ...	✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓
Exposed Machinery Casings on Superstructure Decks ...	✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	HINGED STEEL DOOR. CAPABLE OF BEING MANIPULATED FROM BOTH SIDES.
Deckhouses on Flush Deck Ships ...	HINGED STEEL W/T DOOR, CAPABLE OF BEING MANIPULATED FROM BOTH SIDES. ✓







# PARTICULARS OF PROTECTION TO OPENINGS, ETC.

CH  
ST 4

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
		FREEBOARD DK					*FIDE DK*		
Description of Hatchway	...	Nº. 1.	Nº. 2.	Nº. 3.	Nº. 4.	Nº. 5.	Nº. 1.		
Dimensions of Hatchway	...	8.220 x 7.000	13.250 x 7.000	9.750 x 7.000	13.500 x 7.000	10.500 x 7.000	8.220 x 7.000		
COAMINGS	Height above Deck	230	850				802		
	Thickness { Sides	230 x 90 x 11.8A	12						
	{ Ends		11						
	Stiffeners		230 x 90 x 11.8A	D°	D°	D°	D°		
	Brackets, Stays		9% BKT.						
HATCH BEAMS	Number	5	8	6	8	6	5		
	Spacing	1.366	1.497 - 1.270	1.510 - 1.370	1.523 - 1.312	1.522 - 1.361	1.370		
	Scantling and Sketch	WEB. 350 x 12. ✓ TOP & BOTTOM PLATE. 330 x 12. 50. FL. ✓	D°	D°	D°	D°	D°		
	Bearing Surface	90							
FORE AND AFTERS	Number								
	Spacing								
	Unsupported Lengths								
	Scantling* and Sketch	NONE	NONE	NONE	NONE	NONE	NONE		
	Bearing Surface								
HATCH COVERS	Material	SUGI. ✓							
	Thickness	65% ✓	D°	D°	D°	D°	D°		
	How fitted	F&A ✓							
	Bearing Surface	75 ✓							
Spacing of Cleats	...	610 ✓	590	590	600	600	610		
Number of Tarpaulins	...	1	2	2	2	2	2		
*Are wood fore and afters steel shod at all bearing surfaces? YES. Are battens and wedges efficient and in good condition? YES. Are tarpaulins in good condition and in accordance with rule requirements? YES. Are lashings provided in accordance with rule requirements? YES									

Particulars of any special features:—

FORECASTLE DK. ROPE HATCH - 450 dia, 610 x 11. COAMING. W.T. STEEL COVER SECURED BY EYEBOLTS & BUTTERFLY NUTS ✓  
 UPPER DK. CHAIN LOCKER. - 500 x 460, x 75 x 9. COAMING. D° ✓  
 BOSONS STORE. - 500 x 450. 230 x 11. COAMING. D° ✓  
 STEERING ROOM SKYLIGHT - 1220 x 1500 610 x 6 COAMING. 2. HINGED W.T. STEEL FLAPS. SECURED BY EYEBOLTS & BUTTERFLY NUTS  
 FITTED WITH CANVAS COVER ✓

Compensation fitted to upper deck plating in way of starboard opening



© 2021

Lloyd's Register  
Foundation