


Lloyd's Register of Shipping.
SURVEYS FOR FREEBOARD.
(CONDITIONS OF ASSIGNMENT.)

21350

29 JAN 1945

Ship's Name *M.S. "STORK"* Port of Survey *LEITH*
Official Number *✓* Surveyor's Signature *J. Bell*
Nationality and Port of Registry *U.K. - LONDON* Date of Survey *WHILE BUILDING*

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement :—

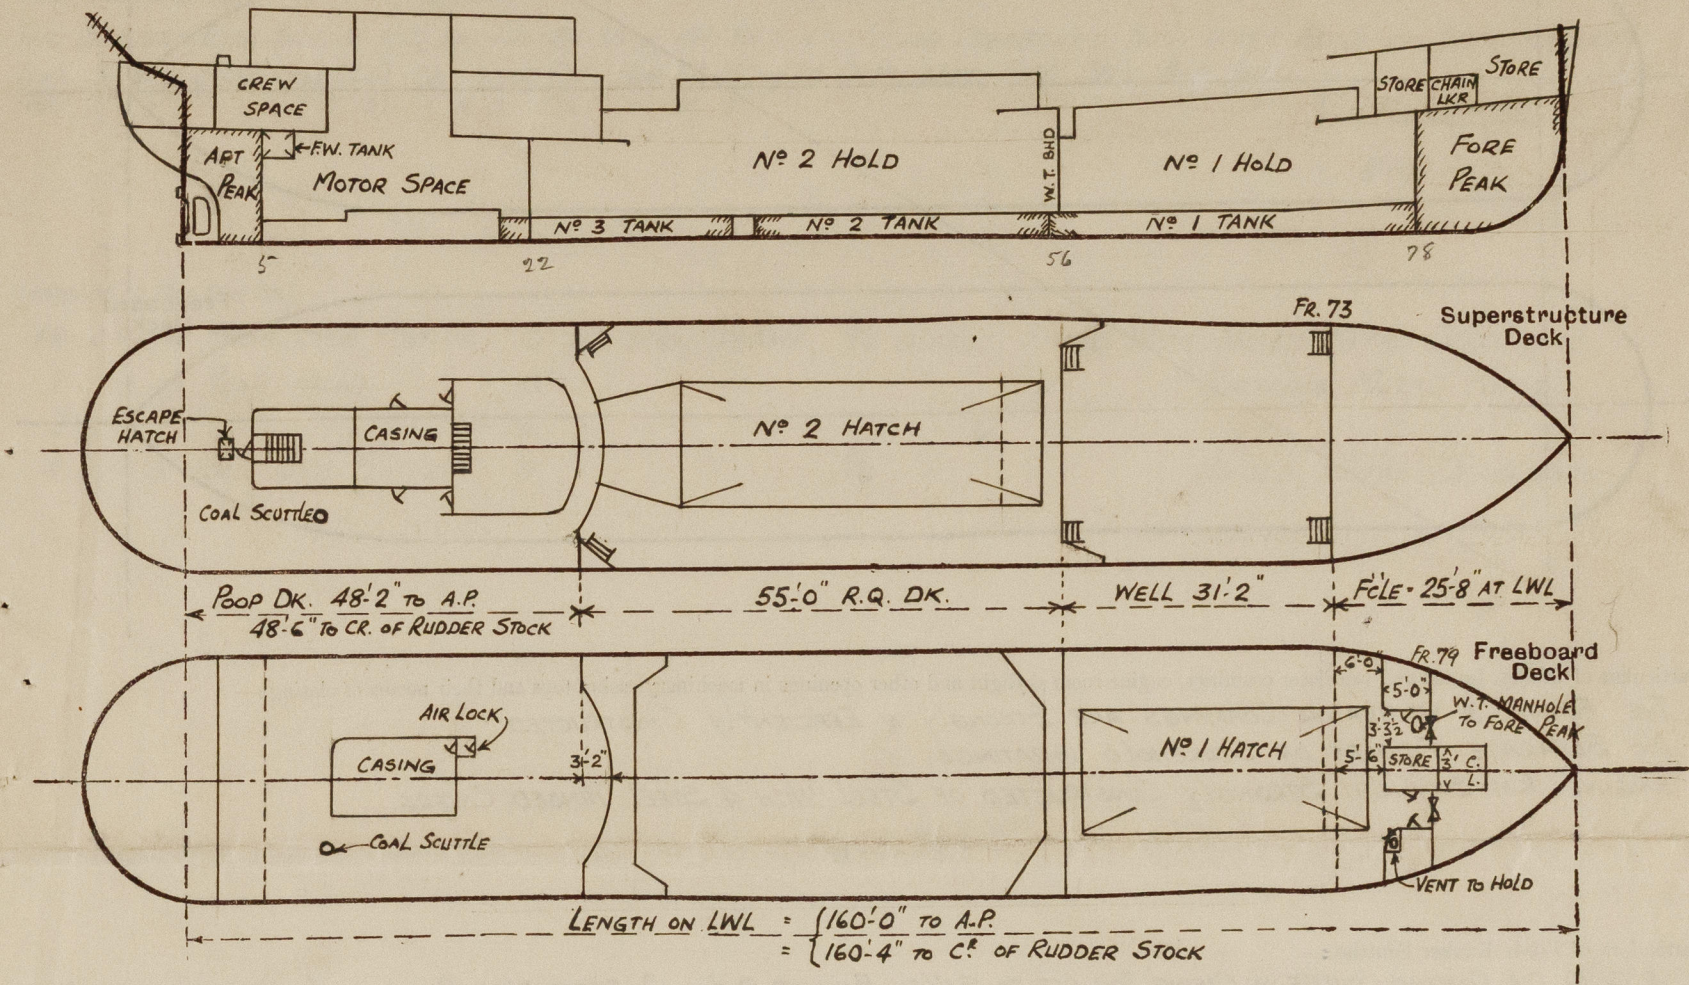

Particulars of Superstructures, Trunks, Casings, Deckhouses.								
	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	30"	30"	3"x2 1/2"x30" O.A. 5"x3"x30" O.A. WELDED TOE ON	26" TO 30"	WELDED TO DECK	NONE	✓	7'-6" (4'-0" ABOVE R.Q.D.)
Raised Quarter Deck Bulkhead ...	30"	30"	3"x2 1/2"x30" O.A. WELDED TOE ON	27" & 28"	WELDED TO DECK	NONE	✓	3'-6"
Bridge, After Bulkhead ...	✓	✓	✓	✓	✓	✓	✓	✓
Bridge, Forward Bulkhead ...	✓	✓	✓	✓	✓	✓	✓	✓
Forecastle Bulkhead ... (FR. 79)	25"	25"	2 1/2"x2 1/2"x25" O.A.	24"	✓	4'-1" x 3'-1"	18"	6'-75" AT FR. 73 TO 7'-50" AT STEM
Trunk, Aft ...	✓	✓	✓	✓	✓	✓	✓	✓
Trunk, Forward ...	✓	✓	✓	✓	✓	✓	✓	✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓	✓	✓	✓	✓	✓	✓	✓
Exposed Machinery Casings on Superstructure Decks ... POOP	28"	26"	3"x2"x 1/4" O.A. WELDED TOE ON	20" & 24"	✓	4'-7" x 2'-0"	21"	7'-3"
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓	✓	✓	✓	✓	✓	✓	✓
Deckhouses on Flush Deck Ships ...	✓	✓	✓	✓	✓	✓	✓	✓

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	No OPENINGS	✓
Raised Quarter Deck Bulkhead ...	No OPENINGS	✓
Bridge, After Bulkhead ...	✓	
Bridge, Forward Bulkhead ...	✓	
Forecastle Bulkhead ...	WOOD SHIFTING BOARDS, 2 1/2" THICK	
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓	
Exposed Machinery Casings on Superstructure Decks ...	TWO STEEL DOORS 4'-7" x 2'-0" - CAN BE OPERATED FROM BOTH SIDES.	
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓	
Deckhouses on Flush Deck Ships ...	✓	

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
POOP DECK									
Description of Hatchway			Nº 1	Nº 2	ESCAPE				
Dimensions of Hatchway			UPPER DK.	R.Q. DK.	HATCH				
COAMINGS	{	Height above Deck	33' 0" x 14' 0"	40' 4" x 14' 0"	18" x 18"				
		Thickness	CR. 3' 9"	CR. 3' 1 1/4"	20 1/2"				
		Sides	SIDE 3' 4"	SIDE 2' 10"	30"				
		Ends	41"	41"	30"				
		Stiffeners	SIDES 9 x 3 1/2" x 368 A	9 x 3 1/2" x 368 A	✓				
HATCH BEAMS	{	Brackets, Stays	ENDS 32" FL. PLT.	7 x 3" x 408 A	✓				
		Number	4	5					
		Spacing	6' 7 3/16"	6' 8 5/8"					
		Scantling and Sketch	PL. 14 1/2" x 43	PL. 12 1/2" x 42"					
		Bearing Surface	4"	4"					
FORE AND AFTERS	{	Number							
		Spacing							
		Unsupported Lengths							
		Scantling* and Sketch							
		Bearing Surface	NONE	NONE	NONE				
HATCH COVERS	{	Material	SIMPLEX	SIMPLEX	W.T. STEEL				
		Thickness	1/8" STEEL TYPE	1/8" STEEL TYPE	COVER				
		How fitted	3"	3"	FITTED				
		Bearing Surface	FORE & AFT	FORE & AFT	WITH TURNBUCKLES				
Spacing of Cleats			24"	24"	✓				
Number of Tarpaulins			2	2	✓				
<p>*Are wood fore and afters steel shod at all bearing surfaces? NONE ✓</p> <p>Are battens and wedges efficient and in good condition? YES ✓</p> <p>Are tarpaulins in good condition and in accordance with rule requirements? YES</p> <p>Are lashings provided in accordance with rule requirements? YES - RING BOLTS PROVIDED EACH SIDE OF HATCHWAYS FOR LASHINGS. WIRE ROPE LASHINGS FITTED AT EACH END OF EACH SECTION OF COVERS. FLAT BARS FITTED OVER THE CENTRE OF EACH SECTION OF COVERS AT BOTH Nº 1 & Nº 2 HATCHWAYS.</p>									

Particulars of any special features:—

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

J. H. Bell



© 2020

Lloyd's Register
Foundation