


PARTICULARS OF PROTECTION TO OPENINGS, ETC.

The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship :-

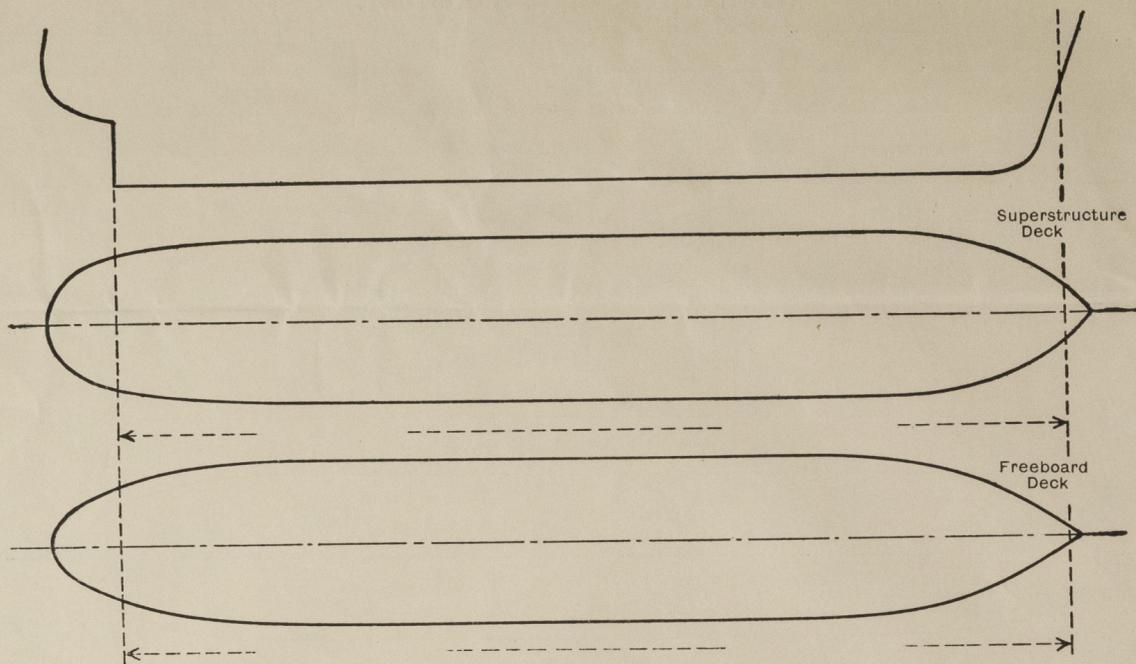

Particulars of fiddle, funnel and ventilator coamings, engine room skylight and other openings in machinery casing tops and their means of closing :-

Particulars of Flush Bunker Scuttles :-

Particulars of Companionways :-

Particulars of Ventilators in exposed positions on freeboard and superstructure decks :-


height of coaming 910 mm

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :-

height 910 mm.

Particulars of Gangway Cargo and Coaling Ports :-

Particulars of Scuppers and Sanitary Discharge Pipes :-

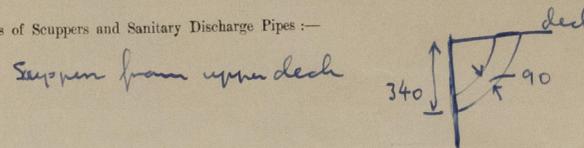

Particulars of Side Scuttles :-

Vertical distance of Sill of lowest Side Scuttle above top of keel 4250 mm from freeboard deck.

Particulars of Guard Rails :-
 upper deck height 1070 350 mm between rods (17 mm aft)
 side " 1070 350 " " chains

Particulars of Gangways, Lifelines, etc. :-

Particulars of Freeing Arrangements.						
	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well		1070	} ship's length 130 mm height			
Forward Well		1070				
State position of each freeing port				} After Well :- } Forward Well :-		
(F. and A. position and height above deck edge)				State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :-		
Additional area where sheer is less than standard.						

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.										
← <i>upper deck</i> → <i>side</i>										
Description of Hatchway	1	2	3	4	5	1				
Dimensions of Hatchway	7,62 x 6,8	7,32 x 6,8	10,97 x 6,8	10,97 x 6,8	7,32 x 6,8	7,62 x 6,8				
COAMINGS	Height above Deck	1000	1000	1000	1000	1000				
	Thickness { Sides									
	{ Ends									
	Stiffeners ...									
Brackets, Stays										
HATCH BEAMS	Number				7	5				steel
	Spacing									cover
	Scantling and Sketch		steel cover	steel cover						
Bearing Surface										
FORE AND AFTERS	Number									
	Spacing									
Unsupported Lengths										
Scantling* and Sketch										
Bearing Surface										
HATCH COVERS	Material				steel	steel				
	Thickness									
	How fitted									
	Bearing Surface									
Spacing of Cleats										
Number of Tarpaulins										

*Are wood fore and afters steel shod at all bearing surfaces?
 Are battens and wedges efficient and in good condition?
 Are tarpaulins in good condition and in accordance with rule requirements?
 Are lashings provided in accordance with rule requirements?

Particulars of any special features:—



© 2021

Lloyd's Register
Foundation