

## LLOYD'S REGISTER OF SHIPPING

UNITED WITH THE BRITISH CORPORATION REGISTER

6 - NOV 1952

Ship's Name "NORLYS"

Official No. 903

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines  
in H A M B U R G.

The accommodation spaces at the after end of vessel has been altered and also extended by fitting a new steel deck house at the forward end of Boat Deck and extending the poop deck house casing about 32'0" further aft at port and starboard sides.

New ventilators have been fitted on the Boat Deck aft for the new accommodation spaces

I P 1 S - 15" Dia. x 26" x .40 Coaming (Cowl tops)

1 P 1 S - 18" Dia. x 26" x .40 Coaming (cowl tops)

Wood plugs and canvas covers supplied.


The openings in the poop front (1 P 1 S) previously closed by portable steel plates and hook bolts have now been fitted with steel hinged W.T. doors operated from both sides. Openings 5'0" x 27" - Sills 18".

New steel hinged W.T. doors (operated from both sides) have also been fitted, one port and one starboard at the after end of the extended poop deck house.

Openings 5'1" x 25" - Sills 18".

At the after end of the new steel deck house, on the Boat Deck aft, an entrance door has been fitted which leads to Living Room from which there is a stairway leading to accommodation under. Opening 5'6" x 24 1/2" Sill 21" fitted with wooden hinged door of substantial construction operated from both sides.

Copy has been placed on board.

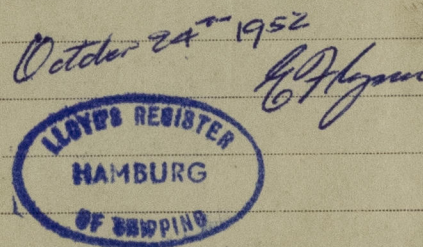

Waters  
9/6

12 NOV 1952

