

REPORT ON ELECTRICAL EQUIPMENT.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Date of writing Report 15th Oct. 40 When handed in at Local Office 22. 10. 40 Port of Glasgow Received at London Office.....

No. in Survey held at Dumbarton & Glasgow Date, First Survey 17. 7. 40 Last Survey 7th Oct. 19 40
 Reg. Book. 87012 on the M.V. "ARDENVOHR" (Number of Visits 5) Tons { Gross 5025
 Net 2929

Built at Dumbarton By whom built Wm Denny & Sons Ltd. Yard No. 1347 When built 1940

Owners Australind Steam Shipping Co. Ltd. Port belonging to London

Electrical Installation fitted by Wm Denny & Sons Ltd. Contract No. 1347 When fitted 1940

Is vessel fitted for carrying Petroleum in bulk no Is vessel equipped with D.F. yes E.S.D. no Gy.C. no Sub.Sig. no

Have plans been submitted and approved yes System of Distribution two wire Voltage of supply for Lighting 110.

Heating - Power 110 Direct or Alternating Current, Lighting D.C. Power D.C. If Alternating Current state frequency - Prime Movers, -

has the governing been tested and found efficient when the whole load is suddenly thrown on and off yes Are turbine emergency governors fitted with a trip switch as per Rule - Generators, are they compound wound yes, are they level compounded under working conditions yes, if not compound wound state distance between generators - and from switchboard - Where more than one generator is fitted are they arranged to run in parallel no, are shunt field regulators provided yes Is the compound winding connected to the negative or positive pole positive Have machines over 100 kw. been inspected by the Surveyors during manufacture and testing - Have certificates of test for machines under 100 kw. been supplied yes and the results found as per rule yes Are the lubricating arrangements and the construction of the generators as per rule yes Position of Generators in engine room is the ventilation in way of generators satisfactory yes are they clear of inflammable material yes, if situated near unprotected combustible material state distance from same horizontally - and vertically -, are the generators protected from mechanical injury and damage from water, steam and oil yes, are the bedplates and frames earthed yes and the prime movers and generators in metallic contact yes Switchboards, where are main switchboards placed near generators


are they in accessible positions, free from inflammable gases and acid fumes yes, are they protected from mechanical injury and damage from water, steam and oil yes, if situated near unprotected combustible material state distance from same horizontally - and vertically -, what insulation material is used for the panels Sindampo, if of synthetic insulating material is it an Approved Type yes, if of semi-insulating material (slate or marble) are all conducting parts insulated therefrom as per Rule - Is the frame effectually earthed yes

Is the construction as per Rule yes, including accessibility of parts yes, absence of fuses on the back of the board yes, individual fuses to pilot and earth lamps, voltmeters, etc., yes locking of screws and nuts yes, labelling of apparatus and fuses yes, fuses on the "dead" side of switches yes Description of Main Switchgear for each generator and arrangement of equaliser switches D.P. switch and fuses

and for each outgoing circuit D.P. change over switch and fuses

Are compartments containing switchboards composed of fire-resisting material or lined as per Rule - Instruments on main switchboard 4

ammeters 2 voltmeters - synchronising devices. For compound machines in parallel is the ammeter connected on the pole opposite to the equaliser connection - Earth Testing, state means provided earth lamps

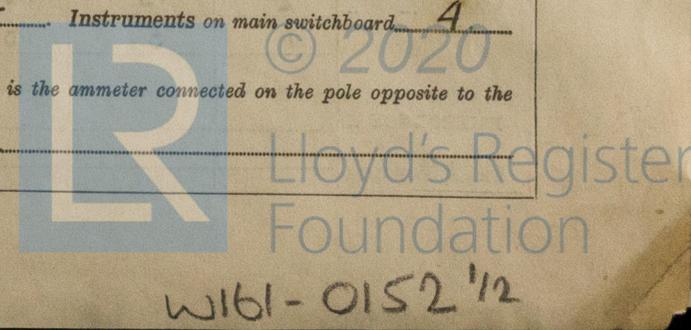

Switches, Circuit Breakers and Fuses, are they as per Rule yes, are the fuses an approved type yes, are all fuses labelled as per Rule yes, are the reversed current protection devices connected on the pole opposite to the equaliser connection —, have they been tested under working conditions —. Joint Boxes, Section Boards and Distribution Boards, is the construction and position as per Rule yes.

Cables, are they insulated and protected as per the appropriate Tables of the Rules yes, if otherwise than as per Rule are they of an approved type —, state maximum fall of pressure between bus bars and any point under maximum load 5 volts, are the ends of all cables having a sectional area of 0.04 square inch and above provided with soldering sockets yes. Are paper insulated and varnished cambric insulated cables sealed at the exposed ends — with insulating compound — or waterproof insulating tape —. Are all the cable runs in accessible positions, not exposed to drip or accumulation of water or oil, high temperatures or risk of mechanical damage yes, are cables laid under machines or floorplates yes, if so, are they adequately protected yes. Are cables in machinery spaces, galleys, laundries, etc., lead covered yes or run in conduit yes. State how the cables are supported and protected L.C. clipped or run in conduit.

Are all lead sheaths, armouring and conduits effectually bonded and earthed yes. Refrigerated chambers, are the cables and fittings as per Rule —. Are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands yes, where unarmoured cables pass through beams, etc., are the holes effectively bushed yes and with what material lead. Alternative Lighting, are the groups of lights in the engine and boiler rooms arranged as per Rule yes. Emergency Supply, state position — and method of control —.

Navigation Lamps, are they separately wired yes controlled by separate double pole switches yes and fuses yes. Are the switches and fuses in a position accessible only to the officers on watch yes, is an automatic indicator fitted yes. Secondary Batteries, are they constructed and fitted as per Rule —, are they adequately ventilated —.

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, weatherproof yes. Are fittings installed where readily combustible materials or inflammable or explosive dust or gases are likely to be present —, if so, how are they protected —.

and where are the controlling switches fitted —, are all fittings suitably ventilated yes, are all fittings and accessories constructed and installed as per Rule yes. Searchlight Lamps, No. of —, whether fixed or portable —, are their fittings as per Rule —. Heating and Cooking, is the general construction as per Rule —.

are the frames effectually earthed —, are heaters in the accommodation of the convection type —. Motors, are all motors constructed and installed as per Rule yes and placed in well-ventilated compartments in which inflammable gases cannot accumulate and free from damage from water, steam and oil yes, if situated near unprotected combustible material state minimum distance from same horizontally — and vertically —.

Have motors of 100 BHP and over been inspected by the Surveyors during manufacture and testing —. Have certificates of test for motors under 100 BHP intended for essential services been supplied and the results found as per Rule yes. Control Gear and Resistances, are they constructed and fitted as per Rule yes.

Lightning Conductors, where required are they fitted as per Rule —. Ships carrying Oil having a Flash Point less than 150° F. Have all the special requirements of the Rules for such ships been complied with —, are all fuses of the cartridge type —.

are they of an approved type —. If portable lamps for use in dangerous spaces are supplied, are they of a self-contained battery-fed flameproof type —. Spare Gear, if the vessel is for open sea service have spares been provided as per Rule yes, are they suitably stored in dry situations yes.

Insulation Tests, has the insulation resistance of all circuits and apparatus been megger tested and found satisfactory yes.

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN ...	2	15	110	136	600	steam engine		
	1	5	110	45.5	1000	oil engine	oil above 150° F.	
EMERGENCY ...								
ROTARY TRANSFORMER								

GENERATOR CABLES.

DESCRIPTION.	KILOWATTS.	CONDUCTORS.		MAXIMUM CURRENT IN AMPERES.		APPROX. LENGTH (load plus return feet).	INSULATED WITH.	HOW PROTECTED.
		No. in Parallel Per Pole.	Sectional Area or No. and Dia. of Strands Sq. Ins. or sq. mm.	In the Circuit.	Rule.			
MAIN GENERATOR ...	15	1	37/072	136	152	40	Rubber	L.C.B.
" " EQUALISER ...								
AUX. GENERATOR.	5	1	7/064	45.5	46	50	"	L.C.B.
EMERGENCY GENERATOR ...								
ROTARY TRANSFORMER: MOTOR								
" " GENERATOR								

MAIN DISTRIBUTION CABLES.

AUX. SWITCHBOARDS AND SECTION BOARDS ...								
Aux. Box "A" BRIDGE DECK	1	7/044	28	31	420	Rubber	L.C.	
Aux. Box "B" ACCOMMODATION	1	19/064	74	83	150	"	L.C.	
Aux. Box "C" CARGO LIGHTING	1	19/044	46	53	150	"	L.C.	
Aux. Box "D" ENGINE ROOM AUX. LIGHT	1	19/083	99	118	160	"	L.C.	
Aux. Box "E" ENGINE ROOM AUX. STARTER	1	19/083	108	118	60	"	L.C.	

LIGHTING AND HEATING, ETC., CABLES.

WIRELESS ...	1	7/029	9	18.2	80	Rubber	L.C.
NAVIGATION LIGHTS DB.	1	3/036	2	12	20	"	L.C.
LIGHTING AND HEATING ENGINE ROOM DB1	1	7/029	12	18.2	100	"	L.C.B.
" " ENGINE ROOM DB2	1	7/029	12	18.2	150	"	L.C.B.

MOTOR CABLES.

ALL IMPORTANT MOTORS TO BE ENUMERATED.	No.	B.H.P.						
OIL PURIFIERS	2	5	1	7/044	21.5	31	40	Rubber L.C.B.
CRANE	1	2	1	7/029	18	18.2	60	" "
COCHAN BOILER MOTOR	1	1	1	3/036	9	12	80	" "
VENT FANS	4	1	1	3/036	9	12	100	" "
F.D. FAN	1	3	1	7/044	24	31	130	" "
WORKSHOP MOTORS	2	3/4	1	3/036	6	12	60	" "
FRIMING PUMP	1	2	1	7/029	18	18.2	100	" "
SAN. PUMP	1	1	1	3/036	9	12	80	" "
F.W. PUMP	1	1	1	3/036	9	12	80	" "

The Electrical Equipment is installed in accordance with the approved plans and the requirements of the Rules.
 All Insulated Conductors are guaranteed to have been tested at the maker's works as specified in the Rules.
 The foregoing is a correct description.

For WILLIAM DENNY & BROTHERS Limited

R. J. Russell

Director: Electrical Engineers.

Date 19-10-40

COMPASSES.

Minimum distance between electric generators or motors and standard compass 30 feet.

Minimum distance between electric generators or motors and steering compass 38 feet.

The nearest cables to the compasses are as follows:—

A cable carrying 36 Ampères led into feet from standard compass led into feet from steering compass.

A cable carrying 140 Ampères 10 feet from standard compass 8 feet from steering compass.

A cable carrying Ampères feet from standard compass feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power yes.

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted yes.

The maximum deviation due to electric currents was found to be nil degrees on any course in the case of the standard compass, and nil degrees on any course in the case of the steering compass.

FOR WILLIAM DENNY & BROTHERS Limited

Builder's Signature.

Date 19-10-40

R. J. Russell Director.

Is this installation a duplicate of a previous case no. If so, state name of vessel

General Remarks (State quality of workmanship, whether insulation tests, etc., have been made, opinions as to class, etc.) The electrical equipment of this vessel has been fitted on board under special survey, tested under full working conditions and found satisfactory. The materials and workmanship are good.

9/6

22/10/40

Total Capacity of Generators 35 Kilowatts.

The amount of Fee ... £ 23 : 15 : When applied for, 22 OCT 1940

Travelling Expenses (if any) £ : : When received, 21.11.1940

R. I. Hutchison + R. P. Storie
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute GLASGOW 22 OCT 1940

Assigned SEE ACCOMPANYING MACHINERY REPORT.

2m10.88.—Transferor. (MADE IN ENGLAND.) (The Surveyors are requested not to write on or below the space for Committee's Minute.)



© 2020

Lloyd's Register Foundation