

(LLOYDS REGISTER.)

G. R. 130
Lloyds Register

VESSELS OF 100 TONS AND UPWARDS.

These particulars are supplied by the Registrar General of Shipping and Seamen for the sole use of Lloyds Register of British and Foreign Shipping.

Signal Letters (if any) **K.J.D.T.**

Official Number. 144,253	Name of Ship. Clan Maciver	No., Date, and Port of Registry. 26/1921 Glasgow.
------------------------------------	--------------------------------------	---

No., Date, and Port of Previous Registry (if any). -

Whether British or Foreign Built. British	Whether a Sailing or Steam Ship; and if a Steam Ship how propelled. Steamship Single Screw	Where Built. Port Glasgow.	When Built. 1921	Name and Address of Builders. Messrs Lithgows Ltd., Port Glasgow.
---	--	--------------------------------------	----------------------------	---

Number of Decks Two	Length from fore part of stem, under the bowsprit, to the aft side of the head of the stern post	Feet. 384	Tenths 8
Number of Masts Two	Length at quarter of depth from top of weather deck at side amidships to bottom of keel	384	0
Rigged Schooner	Main breadth to outside of plank	52	0
Stern Elliptical	Depth in hold from tonnage deck to ceiling at midships ...	26	55
Build Clincher	Depth in hold from upper deck to ceiling at midships, in the case of three decks and upwards	-	-
Galleries none	Depth from top of beam amidships to top of keel	30	33
Head none	Depth from top of deck at side amidships to bottom of keel	29	41
Framework and description of vessel Steel	Round of beam	1	08
Number of Bulkheads Six	Length of engine room, if any	47	70
Number of water ballast tanks, and their capacity in tons Five 958 tons			

PARTICULARS OF DISPLACEMENT.

Total to quarter the depth from weather deck at side amidships to bottom of keel	9463 Tons.	Ditto per inch immersion at same depth	38.41 Tons.
---	-------------------	---	--------------------

PARTICULARS OF PROPELLING ENGINES, &c. (if any).

No. of sets of Engines.	Description of Engines.	Whether British or Foreign made.	When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N. H. P. I. H. P. Speed of Ship.
					No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Direct Acting Triple Expansion	British	1921	Messrs Rankin & Blackmore Ltd, Greenock	Three	27"	48"	517.5 3100
One	C. Scotch Three Steel Boilers	British	1921	Messrs Rankin & Blackmore Ltd., Greenock	44"	73"	-	11 1/2 Knots

PARTICULARS OF TONNAGE.


GROSS TONNAGE.		No of Tons.	DEDUCTIONS ALLOWED.	No. of Tons.
Under Tonnage Deck		4165.22	On account of space required for propelling power	1473.97
Space or spaces between Decks			On account of spaces occupied by Seamen or Apprentices, and appropriated to their use, and kept free from goods or stores of every kind, not being the personal property of the Crew	
Turret or Trunk		26.66	These spaces are the following, viz:—	274.94
Forecastle Houses in		50.23	In Bridge, Poop, Round Houses & Side Houses on Bridge	
Bridge space Houses in		151.78		
Poop or Break		50.56		
Side Houses		113.67		
Deck Houses		5.93		
Chart House				
Spaces for machinery, and light, and air, under Section 78 (2) of the Merchant Shipping Act, 1894			Deductions under Section 79 of the Merchant Shipping Act, 1894, and Section 54 of the Merchant Shipping Act, 1906, as follows:—	
Excess of Hatchways		42.10	Cubic Metres	
Gross Tonnage		4606.15	Masters Accommodation 1931)	
Deductions, as per Contra		1855.47	Boastwains Store 29.74)	
Registered Tonnage		2750.68	Wireless Telegraphy 5.02)	106.56
			Chart Space 5.93)	
			Water Ballast Spaces 46.56)	1855.47

NOTE 1.—The tonnage of the engine room spaces below the Upper Deck is **610.09** tons, and the tonnage of the total spaces framed in above the Upper Deck for propelling machinery and for light and air is **117.78** tons.

NOTE 2.—The undermentioned spaces above the Upper Deck are not included in the cubical contents forming the ship's register tonnage.

Open Forecastle 37.4 feet long less side Houses, Round House & Hatchways	41.77 tons
" Bridge Space Part 1 49.7 feet long less Round House & Hatchways	161.33 "
" " " " 11.43.3 " " Boiler & Engine Casing	107.40 "
" " " " 111.17.4 " " Coalshoot & Hatchway	15.16 "
" Passageways abreast casing on Bridge 33.5 feet long	19.08 "

Name of Master	Certificate of { Service No. Competency No.
No. of Owners	
Name, Residence, and Description of Managing Owner if there are more owners than one.	
The Clan Line Steamers Ltd., 109, Hope Street, Glasgow.	64 shares.
Mgr: Thomas Barr Same address	
Dated 9th June, 1921.	

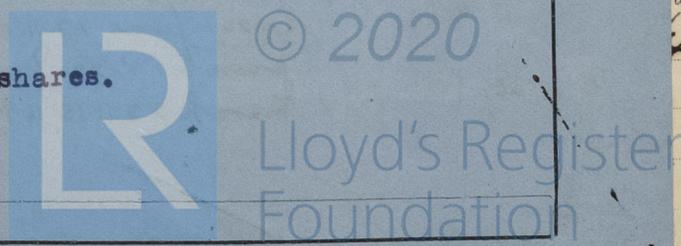

004206-004212-0153

737
 5737 E395
 38.0
 given as
 122 s
 19 s
 774
 32
 0 1/2
 3/16
 28.8
 8
 and
 2