

6th January, 1926.

No. 1208.

LLOYD'S

Extra Spare Gear for Main Engine.

| No. off. | Description. | Group Nos. |
|------------|---|--|
| 1 | Cylinder liner and jacket complete with studs, nuts, joints, etc. | B.43,44,45,46,47,50,53,54,39,141,142,143,152,129,129A,131. |
| 4 | Telescopic tubes for piston water service. | N.65. |
| 6 | Wiper rings for telescopic tubes. | N.12. |
| 2 1/26 2 | ^{GLAND} W.M. W.M. bushes for telescopic tubes. | N.22. N.6. |
| 2 | W.M. neck bushes for telescopic tubes. | N.18. |
| 2 | Fuel valve ahead cam toe pieces. | H.117. |
| 2 | Cam rollers and pins. | H.128,133 & 134. |
| 3 | Fuel valve seats. | K.42. |
| 10 | Rings for H.P. compressor piston (each ring comprising 2 outer and one inner ring). | 0.57,58,60. |
| 7 | M.P. compressor piston rings. | 0.56. |
| 6 | L.P. compressor piston rings. | 0.55. |
| 1 | Complete M.P. compressor suction valve cage. | S.84,48,38,39,83,37,19,87. |
| 1 | Complete M.P. compressor discharge valve cage. | S.19,35,36,40,47,85,86,87. |
| 20 | Valves (suction and discharge) for piston cooling & circulating water pumps. | D.25. |
| 6 | Suction valves for M.E. fuel pumps. | K.139. |
| 6 | Discharge " " " " | K.215. |
| 12 1/26 12 | PISTON HEAD STUDS ("VIBRAC" STEEL) Copper Washers. | B.92. |
| 2 | Joints for H.P. compressor cover. | P.51. |
| 2 | Joints between blow off valve and cylinder. | H.96. |
| 2 | Joints between blow valve & indicator. | H.96,A. |
| 3 | Joints for starting valve housing. | J.187. |
| 3 | Joints for starting valve air inlet pipe. | J.188. |
| 2 | Joints for fuel valve stuffing box. | K.16. |


© 2020

Lloyd's Register Foundation

W375-0017 1/2

No. off. Description. Group Nos.

- 2 Joints for fuel valve seat inner. K.45.
- 2 Joints for fuel valve fuel inlet. K.46.
- 2 Joints for fuel valve air inlet. K.52.
- 6 Joints for fuel valve seat. K.47.
- 3 Joints for fuel pump suction valve. K.144.
- 3 Joints for fuel pump suction valve plug. K.146.
- 3 Joints for fuel pump discharge valve seats. K.219.
- 1 Joint for fuel pump lower chest coupling. K.335.
- 2 Joints for H.P.compressor gland. P.68.
- 2 Joints for H.P.compressor valves. P.69.
- 3 Joints for tee pieces for starting air valve. L.338.
- 1 Joint for H.P.compressor indicator plug. P.70.
- 1 Joint for H.P.compressor pipe connection. P.72.
- 2 Joints for M.P.compressor valves. S.57.
- 3 " " L.P. " " S.57.
- 3 Joints for L.P.compressor valve covers. S.63.
- 1 Joint for M.P.compressor valve box cover. S.72.
- 1 Joint for L.P.Intercooler covers top and bottom. S.102.
- 1 Joint for M.P.Intercooler covers top and bottom. S.103.
- 1 Joint for H.P.Intercooler covers top and bottom. S.104.
- 2 Joints for top of piston water service rods. N.242.
- Rubber joint rings to be in suitable box filled with powdered French Chalk.
- 1 set each port and starboard ahead pads for Michell thrust blocks.
- 1 Maihak type indicator.
- De Laval purifier spares :-
- 2 belts.
 - 6 cowl joints.
 - 6 conical discs.

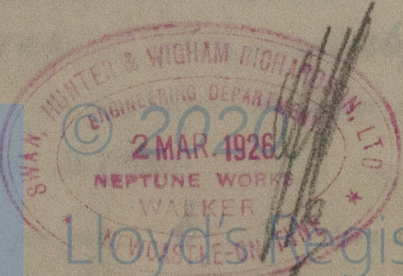

Lloyd's Register Foundation

W375-0017 2/2