



PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS		MAIN DECK R.Q.D.K.									
Description of Hatchway	...	1	2								
Dimensions of Hatchway	...	14'11 1/2" x 14'6"	22'11 1/2" x 14'5 1/2"								
COAMINGS	Height above Deck ... 40 Thickness { Sides ... 42 Ends ... 36 Stiffeners ... Brackets, Stays ...	40 42 36 ✓ ✓	36 1/2 42 36 ✓ ✓								
HATCH BEAMS	Number ... 3 Spacing ... 60" Scantling and Sketch ... Bearing Surface ...	3 60"  18-21 x 30 angles 3 x 3 x 34 8 x 16 x 30 2 1/2"	3 69"  12-18 x 30 angles 3 x 3 x 34 7 x 3 x 34 2 1/2"								
FORE AND AFTERS	Number ... Spacing ... Unsupported Lengths ... Scantling and Sketch ... Bearing Surface ...	✓ ✓ ✓ ✓ ✓	✓ ✓ ✓ ✓ ✓								
HATCH COVERS	Material ... Thickness ... How fitted ... Bearing Surface ...	w.w. 2 1/4" 7 x 4" 3	40 2 1/4" 7 x 1" 3								
Spacing of Cleats	...	26	24								
Number of Tarpaulins	...	3	3								

*Are wood fore and afters steel shod at all bearing surfaces? ✓
 Are battens and wedges efficient and in good condition? Yes ✓
 Are tarpaulins in good condition and in accordance with rule requirements? Yes ✓
 Are lashings provided in accordance with rule requirements? Yes ✓

Particulars of fiddle, funnel and ventilator coamings:—

Engine room skylight, wood. Coaming 8 x 2 1/2" efficient.
 Funnel & Ventilator Coamings are efficient.
 Hinged steel covers to fiddle by gratings.
 Coal hatch on casing top 6-6 x 10-0; Coaming 19 x 30" w.w. on 2 1/2". Fitted 7 x 4". Bearing 2"
 Cleats 32" apart. 1 Tarpaulin.

Particulars of Flush Bunker Scuttles:—

1. P.V. Bunker scuttle on R.Q.D.K. of strong construction, screwed cover.

Particulars of Companionways:—

First Companionway on main deck for 4. to crew quarters. 4-6 x 2-6; Coaming 30, plating 25"
 in stiffeners. Sill 13" wood over 6 x 22". operated from both sides.

Particulars of Ventilators in exposed positions on freeboard and superstructure decks:—

1. Vent. P on side 8" 7 dia Coaming 18 x 30 to crew space 4 vents ✓ M.V.
 1 - S. on main - full 7 dia - 12 x 30 under lower of hole and to hold.
 1 - P - - - 8 - - 33 x 30 To Hold.
 1 - S. - R.Q.D.K. for 4 8 - - 43 x 30 - -
 Wood plugs & canvas covers fitted

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks:—


1. Air pipe on side 8" in low 2 dia, 12 high 1 To fore peak tank
 1 - - - R.Q.D.K. 2 1/4 dia 19 3/8 To aft peak tank Top Section
 1 - - - - 2 1/4 - 19 3/8 - - - Bottom
 Wood plugs used provided and sampling holes
 drilled in upper head.

Particulars of Gangway Cargo and Coaling Ports:—



Brianfield

Superstructure bulkheads, trunks, deckhouses, casings, cargo and coaling hatchways, extent and thickness of sheathing on the freeboard deck, gangway, cargo and coaling ports, and any other openings, etc., which would affect the seaworthiness of the ship are to be shewn on the following sketches:—

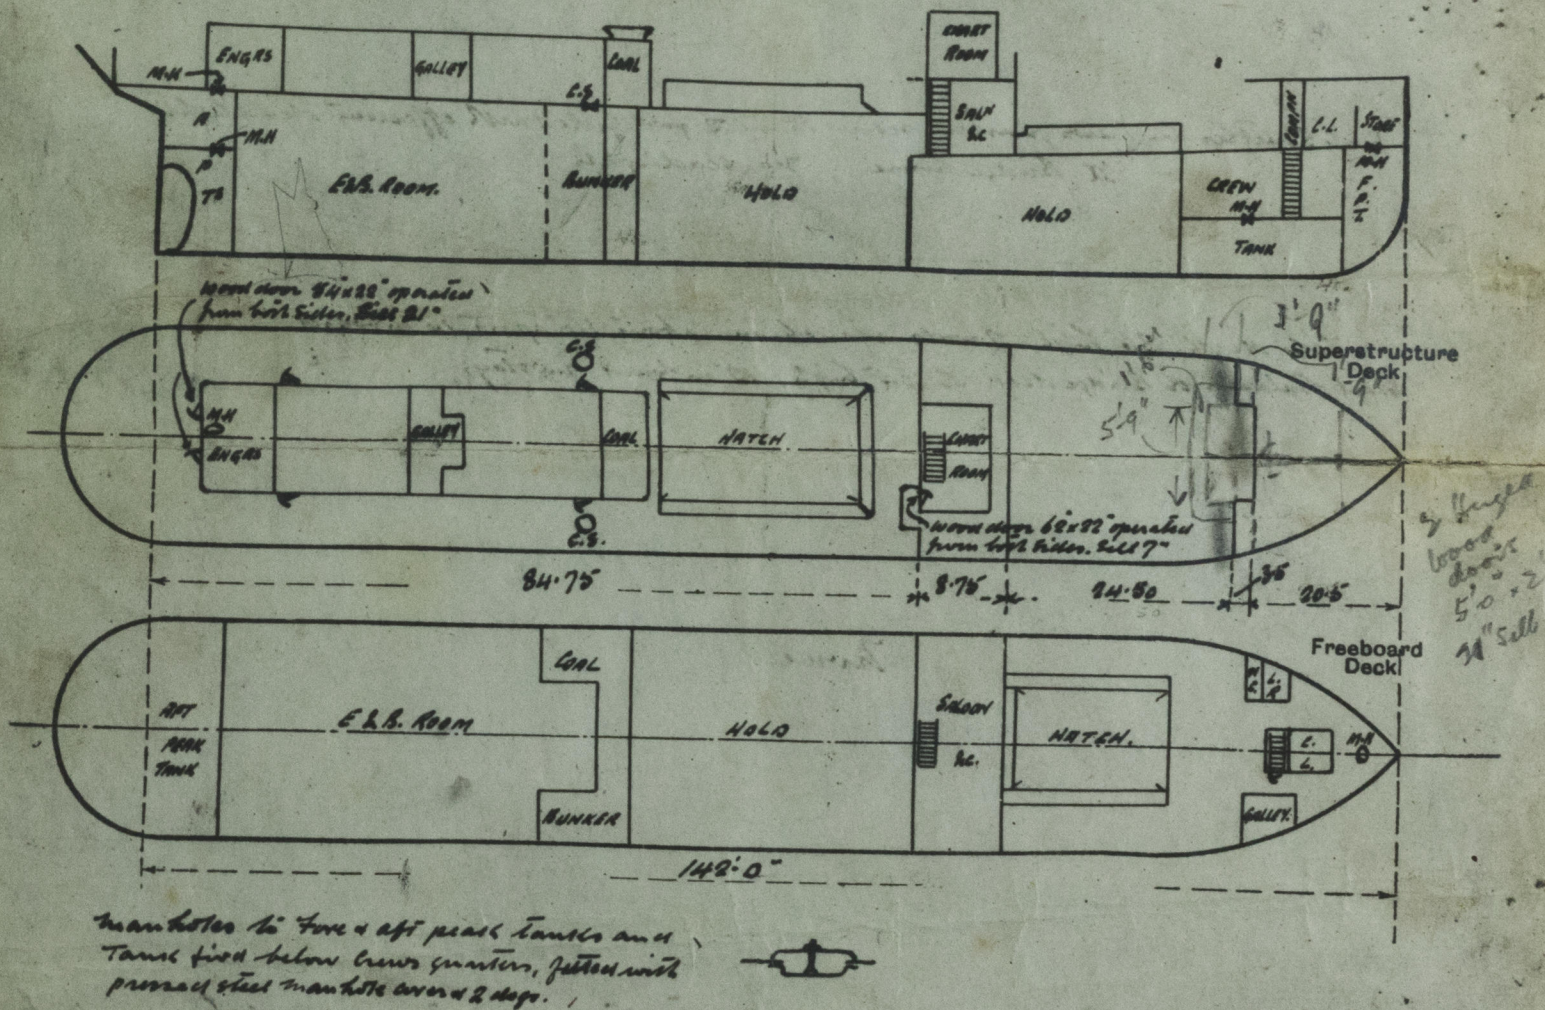

State any special features in the construction of the ship:—