

REPORT ON BOILERS.

Received at London Office 1 - JUN 1946

Date of writing Report 29th March 1946 When handed in at Local Office 29th March 1946 Port of Vancouver, B. C.

No. in Reg. Book. Survey held at North Vancouver, B. C. Date, First Survey 30th Nov., 1945 Last Survey 19th March, 1946 Constant attendance

on the Steel Single Screw Steamer "OTTAWA PARADE" Tons { Gross 909.11
Net 424.14

North
Built at Vancouver, B. C. By whom built Burrard Dry Dock Co. Ltd. Yard No. 247 When built 1946

Engines made at Lachine, P. Q. By whom made Canadian Allis-Chalmers Ltd. Engine No. 582 When made 1946
896

Boilers made at Vancouver, B. C. By whom made Dominion Bridge Co. Ltd. Boiler No. 895 When made 1945

Nominal Horse Power 162 Owners Canadian Government Port belonging to

MULTITUBULAR BOILERS—MAIN, AUXILIARY, OR DONKEY

Manufacturers of Steel Carnegie-Illinois Steel Corpn., Taylor Forge Furnaces, The Steel Co. of Canada Ltd., Page-Hersey Tubes (Letter for Record S)

Total Heating Surface of Boilers 2790 sq. ft. (2 boilers) Is forced draught fitted Yes Coal or Oil fired Oil

No. and Description of Boilers 2 Single Ended Cylindrical Multitubular Working Pressure 200 lbs. per sq. inch

Tested by hydraulic pressure to 350 lbs. Date of test 11-12-45 No. of Certificate 896 - 895 Can each boiler be worked separately Yes

Area of Firegrate in each Boiler fitted No. and Description of safety valves to each boiler 2 - Morrison High Lift

Area of each set of valves per boiler { per Rule 4.05 sq. inch Pressure to which they are adjusted 200 lbs. Are they fitted with easing gear Yes
as fitted 6.28 sq. inch per sq. inch

In case of donkey boilers, state whether steam from main boilers can enter the donkey boiler No Donkey Boiler

Smallest distance between boilers or uptakes and bunkers or woodwork 12" Is oil fuel carried in the double bottom under boilers Yes

Smallest distance between shell of boiler and tank top plating 18" Is the bottom of the boiler insulated Yes

Largest internal dia. of boilers 11'-6-15/16" Length 11'0" Ext. Shell plates: Material O.H. Steel Tensile strength 65000-77000 lbs.

Thickness 1-1/32" Are the shell plates welded or flanged No Description of riveting: circ. seams { end Double
inter

long. seams Treble Riv. Double Butt Strap Diameter of rivet holes in { circ. seams 1-1/8" Pitch of rivets { 3/4" approx.
long. seams 1-1/8" { 7-13/16"

Percentage of strength of circ. end seams { plate 65.38 Percentage of strength of circ. intermediate seam { plate -
rivets 47.05 rivets -

Percentage of strength of longitudinal joint { plate 85.6 Working pressure of shell by Rules 201.3 lbs. per sq. inch
rivets 91.72 combined 89.53

Thickness of butt straps { outer 25/32 No. and Description of Furnaces in each Boiler 3 Morison Corrugated-Stephen Gourlay
inner 29/32 end

Material O.H. Steel Tensile strength 55000 - 65000 lbs. Smallest outside diameter 33 1/4"

Length of plain part { top 7 1/4" Thickness of plates { crown 1/2" Description of longitudinal joint Electric Arc Welded
bottom 7 1/4" { bottom 1/2"

Dimensions of stiffening rings on furnace or c.c. bottom Working pressure of furnace by Rules 204.4 lbs. sq. inch

End plates in steam space: Material O.H. Steel Tensile strength 58000-68000 lbs. Thickness 1" Pitch of stays 15" x 15"

How are stays secured Double Nuts & 5/8" x 1/4" washers at each end Working pressure by Rules 205 lbs.

Tube plates: Material { front O.H. Steel Tensile strength { 58000-68000 lbs. Thickness { 1"
back O.H. Steel { 58000-68000 lbs. { 25/32"

Mean pitch of stay tubes in nests 9.31" Pitch across wide water spaces 8" x 14" Working Pressure { front 266.1 lbs.
back 252.5 lbs.

Girders to combustion chamber tops: Material O.H. Steel Tensile strength 58000 - 68000 lbs. Depth and thickness of girder

at centre Double 10" x 15/16" Length as per Rule 36" Distance apart 10" No. and pitch of stays

in each 3 @ 8 1/2" Working pressure by Rules 208.7 lbs. per sq. inch Combustion chamber plates: Material O.H. Steel

Tensile strength 58000 - 68000 lbs. Thickness: Sides 23/32" Back 23/32" Top 23/32" Bottom 23/32"

Pitch of stays to ditto: Sides 10" x 8 1/2" wing to shell 10" x 8 1/2" wing cc 9" x 8 1/2" wing to centre 10" x 8 1/2" Are stays fitted with nuts or riveted over Nuts

Working pressure by Rules 210.7 lbs. sq. inch Front plate at bottom: Material O.H. Steel Tensile strength 58000-68000 lbs.

Thickness 1" Lower back plate: Material O.H. Steel Tensile strength 68000 lbs. Thickness 1"


Pitch of stays at wide water space 10" x 14 1/2" Are stays fitted with nuts or riveted over Nuts

Working pressure 232.3 lbs. sq. inch Main stays: Material O.H. Steel Tensile strength 62720 - 71680 lbs.

Diameter { At body of stay 2 1/2" No. of threads per inch 6 Area supported by each stay 225 sq. inch
or Over threads 2 3/4"

Working pressure by Rules 238.1 lbs. sq. inch Screw stays: Material O.H. Steel Tensile strength 58000 - 68000 lbs.

Diameter { At turned off part - No. of threads per inch 9 Area supported by each stay 85 sq. inch
or Over threads 1 3/4"

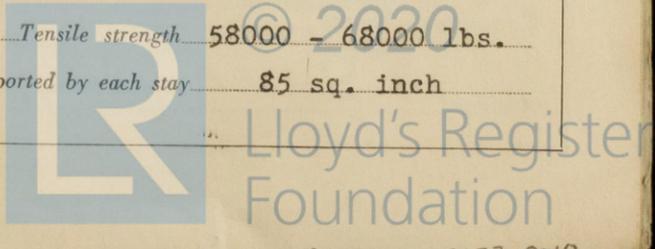

Working pressure by Rules 213.5 lbs. sq. inch. Are the stays drilled at the outer ends No ✓ Margin stays: Diameter { At turned off part, - or 2" ✓ Over threads }
 No. of threads per inch 9 ✓ Area supported by each stay 115 sq. inches ✓ Working pressure by Rules 215.2 lbs. sq. inch
 Tubes: Material O.H. Steel External diameter { Plain 3" ✓ Stay 3" ✓ Thickness { 8 L.S.G. ✓ No. of threads per inch 9 ✓ }
 Pitch of tubes 4" x 4 1/4" ✓ Working pressure by Rules 250 lbs. sq. inch Manhole compensation: Size of opening in shell plate 21-1/8" x 17-1/8" ✓ Section of compensating ring 1-1/16" thick No. of rivets and diameter of rivet holes 32 @ 1-3/8" ✓
 Outer row rivet pitch at ends 10" ✓ Depth of flange if manhole flanged 3 3/4" ✓ Steam Dome: Material -
 Tensile strength - Thickness of shell - Description of longitudinal joint -
 Diameter of rivet holes - Pitch of rivets - Percentage of strength of joint { Plate - Rivets - }
 Internal diameter - Working pressure by Rules - Thickness of crown - No. and diameter of stays -
 Inner radius of crown - Working pressure by Rules -
 How connected to shell - Size of doubling plate under dome - Diameter of rivet holes and pitch of rivets in outer row in dome connection to shell -
 Type of Superheater None fitted Manufacturers of { Tubes - Steel forgings - Steel castings - }
 Number of elements - Material of tubes - Internal diameter and thickness of tubes -
 Material of headers - Tensile strength - Thickness - Can the superheater be shut off and the boiler be worked separately -
 Is a safety valve fitted to every part of the superheater which can be shut off from the boiler -
 Area of each safety valve - Are the safety valves fitted with easing gear - Working pressure as per Rules -
 Pressure to which the safety valves are adjusted - Hydraulic test pressure: tubes - forgings and castings - and after assembly in place - Are drain cocks or valves fitted to free the superheater from water where necessary -
 Have all the requirements of Sections 14 to 22 inclusive for boilers been complied with Yes

The foregoing is a correct description,
Dominion Bridge Co Ltd Manufacturer.
per J. Knox

Forwarded with Vancouver Report No. 6789.
 Are the approved plans of boiler and superheater forwarded herewith /
 (if not state date of approval.)
 Dates of Survey while building { During progress of work in shops - - } Constant attendance from 30th November, 1945 to 19th March, 1946 for Classification and Owners' Representation.
 { During erection on board vessel - - } Total No. of visits -

Is this Boiler a duplicate of a previous case Yes If so, state Vessel's name and Report No. S.S. "OTTAWA PANDA" (Vancouver Report No. 6789)

GENERAL REMARKS (State quality of workmanship, opinions as to class, &c.) These boilers have been constructed under Special Survey of tested materials in accordance with the approved plans, New York letters and otherwise in conformity with the Society's Rules. On completion, the boilers were satisfactorily tested under hydraulic pressure to 350 lbs. per sq. inch. They were fitted on board under Special Survey, examined under working conditions, safety valves adjusted under steam to the working pressure and a satisfactory accumulation test carried out.

Vertical seams of both end plates are fusion welded by Union Melt Process; stress relieved under Survey. Welds ground flush on both sides of plate. Combustion chamber wrapper plates welded to back tube plate and combustion chamber back plate; butts of combustion chamber wrapper plates also welded, all by manual electric welding tested as per Rule and ground flush.

Survey Fee ... \$140.00: } When applied for 4th April 1946 *RB*
 Travelling Expenses (if any) \$ 15.00: } When received 19

For R. Knox and self.

D. J. Underhill
 Engineer Surveyor to Lloyd's Register of Shipping.

Committee's Minute FRI. 14 JUN 1946
 Assigned See F.E. mackay. rpb.

Rpt. 13
 Date of writing
 No. in S Reg. Book.
 Built at
 Owners
 Electric
 Is the Vessel
 System of
 Pressure of
 Direct or A
 If alternatin
 Has the Auto
 Generators
 are they over
 Where more
 series with ea
 approved At
 shi
 Are all termi
 short circuit
 Position of
 in way of the
 woodwork or
 are the genera
 Earthing, are
 in metallic co
 aft dire
 a fuse on each
 Switchboard
 injury and dan
 horizontally fr
 materials. Eb
 is it of an app
 non-hygroscop
 type. Yes
 Yes
 omnibus bars
 "off" position
 switches. L
 150 ampere
 trips for
 Are turbine dri
 fire-resisting m
 meters. - sy
 Yes
 Multiple-w
 Also earth
 do these compl