

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.—STEAM SHIPS.

Index No. 29952
(For London Office only)

JU. MAY. 11 1921

No 4401.

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Hawkins & Wolff No 626

Port of Survey Glasgow
Date of Survey while building
Name of Surveyor J. Thomas

Ship's Name	Port of Registry and Nationality.	Official Number.	Gross Tonnage.	Date of Build.	Particulars of Classification.
GORILLA	Glasgow British	146282	appox 749	1921	100 ft. Contemplated

Registered dimensions from ship's Register.	LENGTH.	BREADTH.	DEPTH.	UNDER DECK TONNAGE.
	200.25	31.1	11.95	599.04
Length on LOADLINE.	200.	Frame Depth 5' Rule " 3' - .25 + .33 ✓	Ceiling fitted ✓ Sheer + .28 ✓ DROOP. + .12. 12.14 Softank top	Peak ✓ Tanks ✓
CORRECTED DIMENSIONS.	200.	31.18 ✓	12.54 ✓	599.07 ✓

Co-efficient of fineness.....	.764
Any modification necessary [Para. 4 (a) to (e)]*	.02 for double bottom
Co-efficient as corrected76.74

Sheer { Stem..... 55 } at Sternpost ... 27.03	82.03 ÷ 2 = 41°	Mean $\frac{40}{30} \frac{30}{10} \frac{10}{36} = .78$
Sheer at $\frac{1}{2}$ of the length from { Stem 31 } at Sternpost 13.01	$14.01 \div 2 = 22"$	Mean $\frac{22}{56} = .40$
Gradual mean Sheer at 18.1	22	
Standard mean Sheer [Table, Para. 18]	18	Correction
Difference.....	4	$\div 4 =$
§ If limited as Para. 18 (f)	-1	

Rise in Sheer { At front of bridge house.....	✓
from amidships { At after end of forecastle	✓
Lowest point of sheer between fro 41-5.	
¶ Fall in Sheer { Para. 18 (d) }	$1" \div 2 = \frac{1}{2}$
Length uncovered	last lowest + $\frac{1}{2}"$ Correction

ALLOWANCE FOR DECK ERECTIONS :—		
Freeboard, Table C.....	14.35 and .76	0 - 5 $\frac{1}{4}$ 6 $\frac{1}{4}$
Correction for Length, if required (Para. 12, 13, and 14)		+ 1 $\frac{1}{2}$ ✓
Freeboard by Table A. corrected for sheer, and for length, if required (Para. 12, 13, and 14)		0 - 7 $\frac{3}{4}$ 4 $\frac{1}{4}$
Difference		2 - 6 $\frac{3}{4}$ 4 $\frac{1}{4}$
Percentage as below.....		$\frac{1}{10} \frac{1}{2}$ 8 $\frac{1}{2}$ 30.48%
		6.86

Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11)	6 $\frac{3}{4}$
Allowance for Deck Erections	- X "
Length.....	Length allowed.
Forecastle..... 21.67	21.67 ✓
Bridge House	✓
↑ Raised Or. Dk.....	✓
Poop..... 73.67	73.67 ✓
Total 95.34	476 95.34 x 8 = 3.81
Length of Ship	200
Corresponding percentage { (Para. 11, 12, 13, and 14) }	30.48%

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck :—

Fresh Water Line	above centre of Disc
Indian Summer Line	" " "
Winter Line	below "
Winter North Atlantic Line	" "

If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible.
In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.
In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and stern-post. In vessels having poops and forecastles, it means the sheer measured at points distant one-eighth of the vessel's length from stem and stern-post.

20. T

Moulded Depth as measured..... 14.44"

Addition for Keel below base line for draught record..... 1.04 inches.

NOTE.—If the depth is measured when vessel is afloat, the details of measurement should be reported.

CORRECTION FOR LENGTH.

Length of Ship on Loadline..... 200	172.75
Length in Table	27.75
Difference	1.0
Correction for 10ft., Table A.	Table C. 5
x Difference divided by 10	+ 2 $\frac{3}{4}$ (if required.) + 1 $\frac{1}{2}$
If $\frac{1}{10}$ ths length covered divide by 2	

CORRECTION FOR IRON DECK.

Proportion covered, if less than $\frac{1}{10}$ ths length covered476
Thickness of usual wood deck, less stringer	3 - 1 $\frac{1}{2}$

CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships..... 31	6
Round of Beam	7.75
Normal round.....	1.75 ÷ 2 = .875
Difference875
Proportion of Deck uncovered (Para. 19)	= + $\frac{1}{2}$

Freeboard, Table A 14.35 and .76

Correction for Sheer

Correction for Length

Allowance for Deck Erections

Correction for Round of Beam.....

Correction for fall in Sheer (if any)..... para 18/01 + $\frac{1}{2}$

Correction for Iron Deck (if required)

Additions for non-compliance with provisions of Para. 11 (d) and (e) +

Other Corrections (if any)

Winter Freeboard

Summer Freeboard

Indian Summer Freeboard

N. A. Winter Freeboard

Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or iron deck with side.

Winter Freeboard from deck line

Summer " " "

Indian Summer " " "

N. A. Winter " " "

State dimensions of freeing port area on back of this form.

The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the draft forward and aft should be reported.

© 2020
Lloyd's Register Foundation
002127-002137-0155

Do all the Frames extend to the top height in the Poop? *Poop & main deck* Raised Quarter Deck? *yes* Bridge House? *yes* Forecastle? *yes*
 To what height do the Reverse Frames extend? *across double bottom in hold and engine space upper turn of bridge in fore to after room*
 Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? *yes*
 Give particulars of the means for closing the openings in Bulkhead *no openings fitted*
 Is the Poop or Raised Quarter Deck connected with the Bridge House? *no* Has the Bridge House an efficient Bulkhead at the fore end?
 Give particulars of the means for closing the openings in Bulkhead *✓*
 What is the thickness of the *Poop* Front plating? *.32* and Coaming plate? *.32*
 Give scantlings and spacing of the Stiffeners *6 x 3 x .50 angle spaces 30" apart.*
 Are bracket plates fitted at each end of the Stiffeners? *yes* Are hor'l. brackets fitted connecting *Poop* Bulk'd. with Bulwarks? *yes*
 Has the Bridge House an efficient Iron Bulkhead at the after end? *✓*
 How are the openings closed? *✓*
 Is the Forecastle at least as high as the main or top-gallant rail? *yes* Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? *yes*
 Are the Engine and Boiler openings covered by a *Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse?* *yes*
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed? *✓*
 Give thickness of plating; scantlings and spacing of Stiffeners *✓*
 What is the height of the exposed Casings? *✓* Are suitable means provided for closing all openings in them in bad weather? *✓*
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— *yes*

Position and Size.	ONE HATCH 82' 6" x 17' 0"	Ship. Rule.	Ship. Rule.	Ship. Rule.	Ship. Rule.	Ship. Rule.	Ship. Rule.
COAMING. Height above top of DECK	30"						
Thickness { Sides..... Ends.....	.50" .44"						
SHIFTING BEAMS OR WEB PLATES.	Number Section and Scantlings Material	Webo. <i>J</i> 16" x 34" with double angles <i>I</i> 18" x 6" x 55 lbs.		T. S. B. 4 x 3 x .444			
* FORE AND AFTERS.	Number Section and Scantlings Material	none					
HATCHES Thickness	2 1/2"						
Remarks.....	7 x 3 x .43 B.A. all round hatch.						

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? *Strake between Main and Bridge Sheerstrakes?*

Delete the words { The Crew are, are not, berthed in the bridge house.
that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.


Length of Bulwarks in well *105' 0"*

Area of Freeing Ports required by Para. 11 (e) each side of vessel = *24.9* Sq. ft.

Ft. Tenths. Ft. Tenths. No. *3.0 x 1.66 x 5* } Freeing Ports = *21.5* Sq. ft.

x x } (each side of vessel)

Total deficiency or excess = *3.4* Sq. ft.

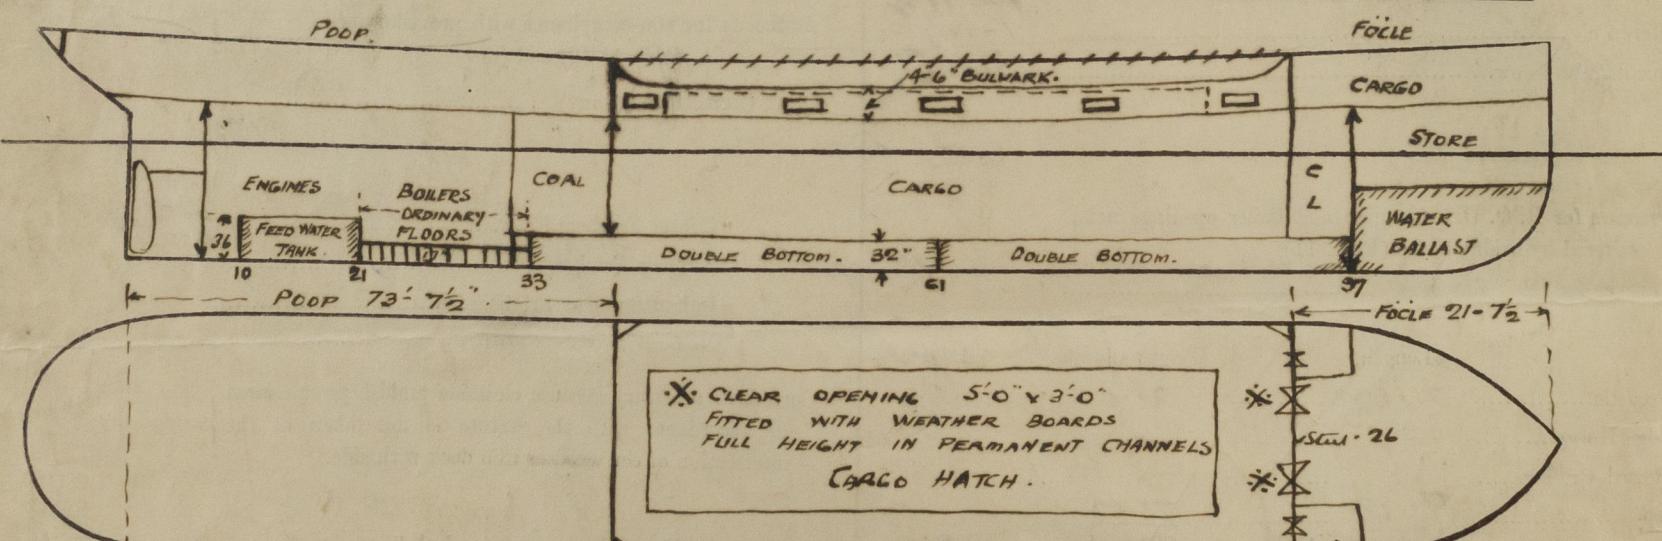

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel

new vessel.

This is a sister vessel to S/S. "REDBREAST" Glasgow Report no 40731.
Midship section and profile of vessel are enclosed for reference.
Owners Request form attached.

Address

Received by me



Lloyd's Register
Foundation