

REPORT ON ELECTRIC LIGHTING INSTALLATION. No. 13923

Port of Hamburg Date of First Survey 2 Jan. Date of Last Survey 10th March No. of Visits 10
 No. in Reg. Book 30 Supp. on the Iron or Steel S.S. "Jupiter" Port belonging to Hamburg
 Built at Kiel By whom Howaldtsmerke When built 1914
 Owners Deutsch-Amerik. Petroleum Ges. Owners' Address Hamburg
 Yard No. 582 Electric Light Installation fitted by the Builders When fitted 1914

DESCRIPTION OF DYNAMO, ENGINE, ETC.

1 Compound Steam Engine coupled direct to a Allgemeine Electr. Gesellsch. Dynamo running at 250 rev. per minute.

Capacity of Dynamo 183 Amperes at 115 Volts, whether continuous or alternating current continuous

Where is Dynamo fixed Eng. Room Whether single or double wire system is used double

Position of Main Switch Board Eng. Room having switches to groups A, B, C, D, & E. of lights, &c., as below

Positions of auxiliary switch boards and numbers of switches on each 1 Eng. Room with 6 switches, 1 Eng. room top - 1 lower room 1 passage aft with 7-9 & 10 switches, 2 main Deck - 1 boat deck with 8-6 & 16 switches, 1 Forecastle with 8 switches & 1 in Chart house with 5 switches.

If cut outs are fitted on main switch board to the cables of main circuit yes and on each auxiliary switch board to the cables of auxiliary circuits yes and at each position where a cable is branched or reduced in size yes and to each lamp circuit yes

If cessel is wired on the double wire system are cut outs fitted to both flow and return wires or cables of all circuits including lamp circuits yes

Are the cut outs of non-oxidizable metal yes and constructed to fuse at an excess of 25% per cent over the normal current

Are all cut outs fitted in easily accessible positions yes Are the fuses of standard dimensions yes If wire fuses are used are permanent instructions fitted on or near each switch board giving particulars of proper size of fuse for each circuit yes

Are all switches and cut-outs constructed of incombustible materials and fitted on incombustible bases yes

Total number of lights provided for 240 arranged in the following groups:—

A	Eng. Room Space	47 lights each of	25	candle power requiring a total current of	35	Amperes
B	Midship aft	72 lights each of	25	candle power requiring a total current of	54	Amperes
C	u fore	83 lights each of	25	candle power requiring a total current of	61	Amperes
D	Forecastle	20 lights each of	25	candle power requiring a total current of	15	Amperes
E	Chart house	5 lights each of	32	candle power requiring a total current of	5	Amperes
incl. in E		2 Mast head light with 1 lamps each of	32	candle power requiring a total current of	2	Amperes
		3 Side light with 1 lamps each of	32	candle power requiring a total current of	2	Amperes
		4 cluster Cargo lights of each 6 - 25		candle power, whether incandescent or are lights	17	"

If are lights, what protection is provided against fire, sparks, &c. no are light fitted

Where are the switches controlling the masthead and side lights placed Chart house

DESCRIPTION OF CABLES.

Main cable carrying	183 Amperes, comprised of	37 wires, each	1.8 L.S.G. diameter,	95 square inches total sectional area	German requirements
Branch cables carrying	120 Amperes, comprised of	19 wires, each	2.5 L.S.G. diameter,	50 square inches total sectional area	
Branch cables carrying	100 Amperes, comprised of	19 wires, each	1.8 L.S.G. diameter,	35 square inches total sectional area	
Leads to lamps carrying	25 Amperes, comprised of	2 wires, each	2.7 L.S.G. diameter,	6 square inches total sectional area	
Cargo light cables carrying	3.5 Amperes, comprised of	15 wires, each	— L.S.G. diameter,	2.4 square inches total sectional area	

DESCRIPTION OF INSULATION, PROTECTION, ETC.


Main and branch cables copper lined, coated with Para coudehouse, coated with impregnated jute tape, lead covered, spun with impregnated jute band, double iron bound and jute spun and asphalted.
Circuits & lamp leads: copper lined, coated with coudehouse rubber and spun with tape insertion.

Joints in cables, how made, insulated, and protected Soldered and covered with coudehouse and tape for lamp circuits and leads, metallic screw joints in water tight boxes on incombustible bases for main and branch cables

Are all the joints of cables thoroughly soldered, resin only having been used as a flux yes Are all joints in accessible positions, none being made in bunkers, cargo spaces, or spaces which may at any time be used for carrying cargo, stores, or baggage yes

Are there any joints in or branches from the cable leading from dynamo to main switch board no

How are the cables led through the ship, and how protected Main and branch cables carried open except where they are exposed to moisture, where they are led in iron boxes & pipes. Circuits & lamp leads are protected by wood. ballens.

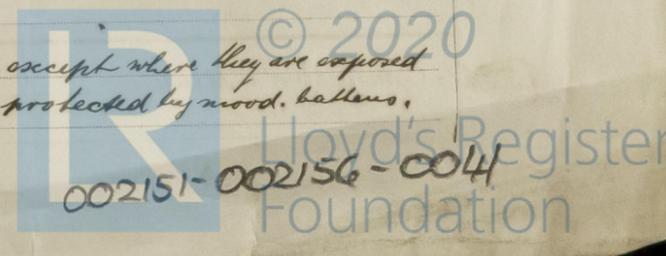

DESCRIPTION OF INSULATION, PROTECTION, ETC.—continued.

Are they in places always accessible yes

What special protection has been provided for the cables in open alleyways or where exposed to weather or moisture Iron bound leads covered cables, protected by iron casings and pipes.

What special protection has been provided for the cables near galleys or oil lamps or other sources of heat Iron bound cables

What special protection has been provided for the cables near boiler casings do do

What special protection has been provided for the cables in engine room do do

How are cables carried through beams hard wood, bushes through bulkheads, &c. screwed brass bushes

How are cables carried through decks Iron galvanized stand pipes 14" high, filled with non-conducting asphalt.

Are any cables run through coal bunkers no or cargo spaces no or spaces which may be used for carrying cargo, stores, or baggage no

If so, how are they protected —

Are any lamps fitted in coal bunkers or spaces which may at times be used for cargo, coals, or baggage no

If so, how are the lamp fittings and cable terminals specially protected —

Where are the main switches and cut outs for these lights fitted —

If in the spaces, how are they specially protected —

Are any switches or cut outs fitted in bunkers no

Cargo light cables, whether portable or permanently fixed portable How fixed —

In vessels fitted on the single wire system, how is the dynamo terminal fixed to the hull of vessel —

How are the returns from the lamps connected to the hull —

Are all the joints with the hull in accessible positions —

The installation is yes supplied with a voltmeter and yes an amperemeter, fixed on main switch board

VESSELS BUILT FOR CARRYING PETROLEUM.

In vessels built for carrying petroleum, are all switches and cut-outs fitted in positions not liable to the accumulation of petroleum vapour or gas yes

Are any switches, cut outs, or joints of cables fitted in the pump room or companion no

How are the lamps specially protected in places liable to the accumulation of vapour or gas all fittings screwed repair tight.

The copper used is guaranteed to have a conductivity of — per cent. that of pure copper.

Insulation of cables is guaranteed to have a resistance of not less than 50 millions Siemens units per statute mile after 24 hours' immersion in seawater.

The foregoing statements are a correct description of the Electric Light installation fitted by us on this vessel and we declare that it is at this date in good order and safe working condition.

The Builders are the — Electrical Engineers Date —

COMPASSES.

Distance between dynamo or electric motors and standard compass 180 ft.

Distance between dynamo or electric motors and steering compass 145 ft.

The nearest cables to the compasses are as follows:—

A cable carrying	<u>16</u>	Amperes	<u>close to</u>	feet from standard compass	<u>close to</u>	feet from steering compass
A cable carrying	<u>—</u>	Amperes	<u>—</u>	feet from standard compass	<u>—</u>	feet from steering compass
A cable carrying	<u>—</u>	Amperes	<u>—</u>	feet from standard compass	<u>—</u>	feet from steering compass

Have the compasses been adjusted with and without the electric installation at work at full power yes

The maximum deviation due to electric currents, etc., was found to be nil degrees on — course in the case of the standard compass and nil degrees on — course in the case of the steering compass.

HOWALDTSWERKE

— Builder's Signature. Date —

GENERAL REMARKS.

The Electric Light installation on board of this Vessel is in my opinion fitted in conformity with the Society's Rules and eligible to be recorded "Electr. Light" in the Society's Register Book.

It is submitted that this vessel is eligible for THE RECORD. Elec. light.

J. Köller
Surveyor to Lloyd's Register of British and Foreign Shipping.

Committee's Minute —

THE SURVEYORS ARE REQUESTED NOT TO WRITE ACROSS THIS MARGIN.



© 2020

Lloyd's Register Foundation