

Do all the Frames extend to the top height in the Poop? Raised-Quarter Deck? *Yes* Bridge House? *Yes* Forecastle? *Yes*
 To what height do the Reverse Frames extend? *To hold clinger and main and R. A. D. alternately.*
 Has the ~~Poop~~ Raised Quarter Deck an efficient Iron Bulkhead at the fore end? *Yes.*
 Give particulars of the means for closing the openings in Bulkhead *No openings.*
 Is the ~~Poop~~ Raised Quarter Deck connected with the Bridge House? *Yes* Has the Bridge House an efficient Bulkhead at the fore end? *Yes.*
 Give particulars of the means for closing the openings in Bulkhead *No openings.*
 What is the thickness of the Bridge Front plating? *5/16"* and Coaming plate? *7/16"*
 Give scantlings and spacing of the Stiffeners *3 1/2" x 3 x 7/16" spaced 30" apart. Covers accommodation.*
 Are bracket plates fitted at each end of the Stiffeners? *At heels only Yes* Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? *No. Yes*
 Has the Bridge House an efficient Iron Bulkhead at the after end? *Yes.*
 How are the openings closed? *No openings*
 Is the Forecastle at least as high as the main or top-gallant rail? *Yes* Has the Forecastle an efficient Iron ~~or Wood~~ Bulk'd. at after end? *Yes.*
 Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? *Covered by R. A. D. with Bridge house in front of Boiler opening.*
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed?
 Give thickness of plating; scantlings and spacing of Stiffeners
 What is the height of the exposed Casings? Are suitable means provided for closing all openings in them in bad weather?
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— *Yes.*

*Rule 6 x 3 + 2
 bulk angle
 bracket top +
 bottom and
 horizontal bulkhead
 to bulwark rail*


Position and Size.	No 1. 11-0 x 12-0		No 2. 18-4 x 12-0		No 3. 18-4 x 12-0.					
Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
COAMING.	Height above top of DECK	36"	30"	36"	30"	36"	24"			
	Thickness	Sides.....	7/16	7/16	9/16	9/16	9/16	9/16		
		Ends.....	7/16	7/16	8/16	8/16	8/16	8/16		
SHIPPING BEAMS OR WEB PLATES.	Number.....			one	one	one	one			
	Section and Scantlings.....			web plate 8/16 thick with double angles.						
	Material.....			wood	wood	wood	wood			
FORE AND AFTERS.	Number.....	Three	Three	Three	Three	Three	Three			
	Section and Scantlings.....	Centre 4x7 Sides 6x5	Centre 4x7 Sides 6x5	Centre 4x7 Sides 6x5	Centre 4x7 Sides 6x5	Centre 4x7 Sides 6x5	Centre 4x7 Sides 6x5			
	Material.....	wood.	wood	wood	wood	wood	wood.			
HATCHES Thickness.....	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2				
Remarks.....										

*Depth of fore afters
 are from the
 underside of hatches.*

* When the Fore and Afters are of wood the depth should be stated from the underside of the hatches.
 (If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? *7/16* Strake between Main and Bridge Sheerstrakes? *10/16*
 Delete the words { The Crew ~~are~~, are not, berthed in the bridge house.
 that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, ~~are not~~ satisfactory. *gangway will be fitted.*
 Length of Bulwarks in well *62'-4" 65.8*
 Area of Freeing Ports required by Para. 11 (a) each side of vessel = *13.16* Sq. ft.
 Ft. Tenths. Ft. Tenths. No. } Freeing Ports (each side of vessel) = *13.12* Sq. ft.
2.5 x 1.45 x 3
 Total deficiency or excess = *✓ 74* Sq. ft.

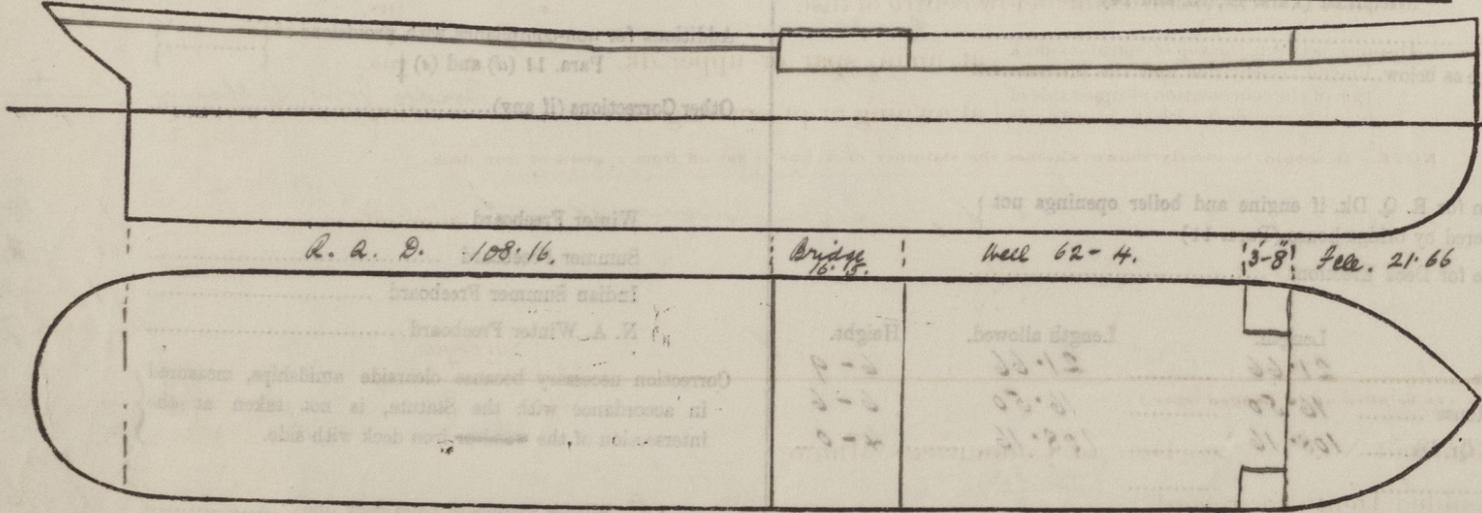

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel *Request form is enclosed herewith.*

Owners

Address

Fee £ *2.2*

Received by me *27/7/11*