

102360

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

Ship's Name EMPIRE SUSAN

Port of Survey NEWCASTLE-ON-TYNE

Official Number 169185


Surveyor's Signature

Nationality and Port of Registry British. Newcastle.

Date of Survey

During Construction

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

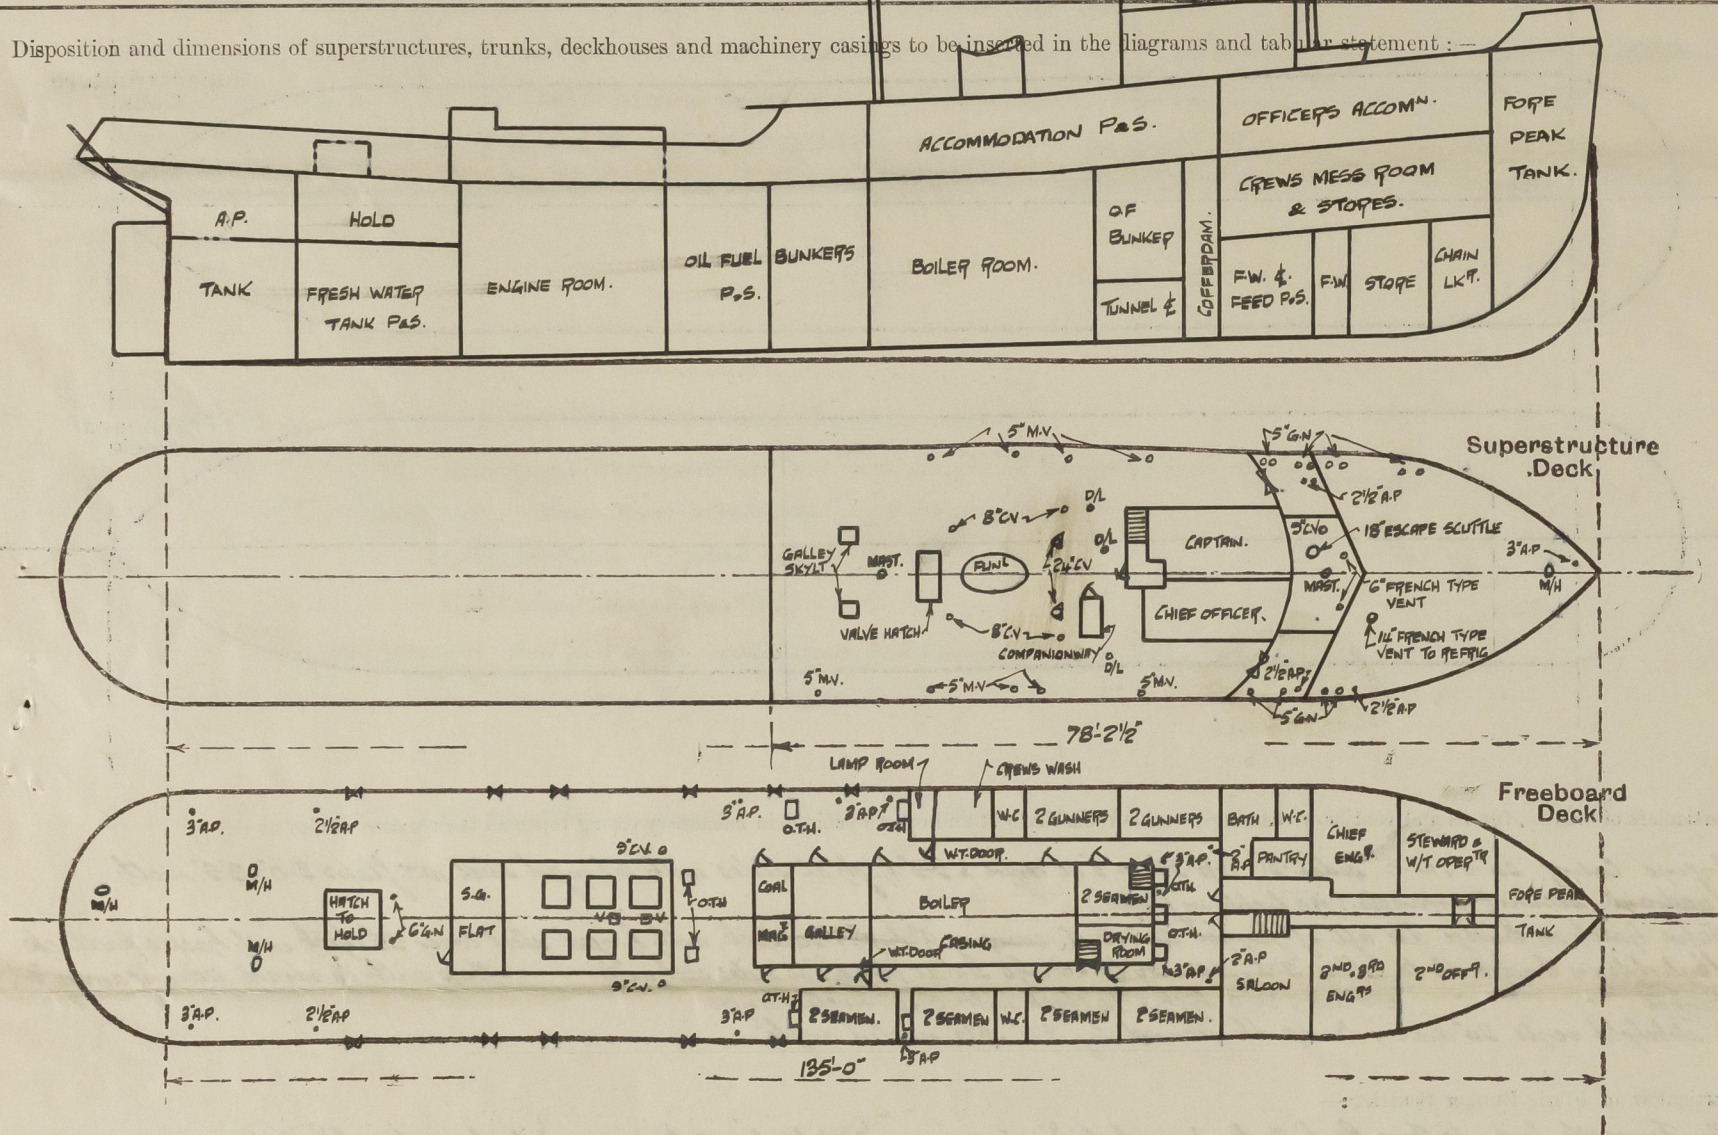

Particulars of Superstructures, Trunks, Casings, Deckhouses.


	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	✓							
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead ...	✓	.28	3.3.30	✓	✓	2 @ 4'-6" x 2'-0"	18"	7'-0" ✓
Bridge, Forward Bulkhead ...	✓	.30	3.3.30	2'-3	NONE	2 @ 4'-6" x 2'-0"	18"	7'-0" ✓
Forecastle Bulkhead ...								
Trunk, Aft ...	✓							
Trunk, Forward ...	✓							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	2'-0"	.31	3.3.30	2'-0"	NONE	2 @ 4'-8" x 2'-0" 3 @ 4'-9" x 2'-3"	21"	7'-0" ✓
Exposed Machinery Casings on Superstructure Decks ...	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	2'-0"	.31	3.3.30	2'-0"	NONE	3 @ 4'-8" x 2'-3" 2 @ 4'-8" x 2'-0" 2 @ 5'-6" x 2'-6"	21" 18"	7'-0" ✓
Deckhouses on <del>Flush Deck Ships</del> BRIDGE ...	3'-6"	.30	3.3.30	2'-6"	NONE	4'-3" x 2'-0"	18"	7'-0" ✓

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	✓
Raised Quarter Deck Bulkhead ...	✓
Bridge, After Bulkhead ...	2 mechs w.t. steel doors with toggles etc capable of being manipulated from both sides.
Bridge, Forward Bulkhead ...	2 hinged doors (1 steel & 1 wood) with spring locks & handles both sides.
Forecastle Bulkhead ...	
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	5 hinged steel doors with spring locks and handles both sides.
Exposed Machinery Casings on Superstructure Decks ...	✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	5 hinged steel doors with spring locks and handles both sides. 2 ladderway openings (1P. 1S) for access to Bridge deck
Deckhouses on <del>Flush Deck Ships</del> BRIDGE ...	1 wood hinged door for access to Officers accom <sup>n</sup> with spring lock and handles both sides.



The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship:—



**Particulars of Flush Bunker Scuttles:—**

Particulars of Companionways :—

Particulars of Ventilators in exposed positions on freeboard and superstructure decks :—

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :—

NOTE:- All O.F. bunker air pipes are fitted with gauge mouthpiece  
Remainder provided with wood plugs. ✓

EMPIRE SUSAN.

Particulars of Scuppers and Sanitary Discharge Pipes :—


Particulars of Side Scuttles:—

Vertical distance of Sill of lowest Side Scuttle above top of keel

## Particulars of Guard Rails :—

Particulars of Gangways, Lifelines, etc. :—

None.



© 2020  
Lloyd's Register  
Foundation

002330-002339-0015

2



PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
Description of Hatchway		9 OIL FUEL BUNKER HATCHES ON UPPER DECK		HATCH TO HOLD UPPER DECK AFT.					
Dimensions of Hatchway		1'-8" x 2'-0"		5'-2" x 4'-8 1/2"					
COAMINGS	Height above Deck	2'-6" ABOVE STEEL DK.		2'-9"					
	Thickness	3/8"		5/16"					
	Stiffeners	✓		✓					
	Brackets, Stays	✓		✓					
HATCH BEAMS	Number								
	Spacing								
FORE AND AFTERS	Number								
	Spacing								
HATCH COVERS	Material	HINGED STEEL PLATE.		REDWOOD					
	Thickness	20		2 1/2"					
HATCH COVERS	How fitted	GREASY HEMP PACKING		FORE & AFT.					
	Bearing Surface	3/8" ROUND BAR WELDED TO UNDERSIDE OF COVER.		3"					
Spacing of Cleats		2 EACH SIDE		22" AT ENDS & 17" AT SIDES					
Number of Tarpaulins		NONE		2					
*Are wood fore and afters steel shod at all bearing surfaces? NONE NONE									
Are battens and wedges efficient and in good condition? NONE YES									
Are tarpaulins in good condition and in accordance with rule requirements? NONE YES									
Are lashings provided in accordance with rule requirements? NONE NONE									

Particulars of any special features :—

Endorsement at first survey and at surveys for renewal of Certificate :—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

