

# REPORT ON BOILERS.

21 JAN 1944

Received at London Office

Date of writing Report **6th Jan. 1943** When handed in at Local Office **6th Jan. 1943** Port of **Vancouver, B. C.**  
**Re-typed 15th Sept., 1943.**

No. in Reg. Book. Survey held at **Vancouver, B.C.** Date, First Survey **9th November, 1942** Last Survey **6th January, 1943**

-- on the **Steel Single Screw Steamer, "FORT FINLAY"** (Number of Visits **16**) Tons {Gross **7133.95**  
Net **4243.92**

Built at **Vancouver B.C.** by whom built **West Coast Shipbuilders Limited** No. **112** When built **1943**

Engines made at **Toronto, Ontario.** By whom made **John Inglis & Son** Engine No. **133** When made **1942**

Boilers made at **Vancouver, B.C.** By whom made **Vancouver Iron Works, Ltd.** Boiler No. **308, 311, 313** When made **1942**

Nominal Horse Power **504** Owners **Minister of Munitions & Supply of Canada** Port belonging to **--**

## MULTITUBULAR BOILERS—MAIN, ~~AUXILIARY, OR DONKEY.~~

Manufacturers of Steel **Algoma Steel Co., Luken Steel Co., Page-Hersey Co. Worth Steel Co., Steel Co. of Canada, American Welding Co.** (Letter for Record **---**)

Total Heating Surface of Boilers **7,140 square feet** Is forced draught fitted **Yes** Coal or Oil fired **Coal**

No. and Description of Boilers **Three single ended cylindrical Multitubular** Working Pressure **220 lbs.**

Tested by hydraulic pressure to **380 lbs.** Date of test **11-11-42, 16-11-42, 17-11-42** No. of Certificate **308, 311, 313** Can each boiler be worked separately **Yes**

Area of Firegrate in each Boiler **51 sq. ft.** No. and Description of safety valves to each boiler **Two 2 1/2" Dia. Morrison High Lift**

Area of each set of valves per boiler {per Rule **6.35 sq. in.** Pressure to which they are adjusted **220 lbs.** Are they fitted with easing gear **Yes**  
as fitted **7.95 sq. in.**

In case of donkey boilers, state whether steam from main boilers can enter the donkey boiler **no donkey boiler**

Smallest distance between boilers or uptakes and bunkers or woodwork **2 feet** Is oil fuel carried in the double bottom under boilers **No**

Smallest distance between shell of boiler and tank top plating **2 feet** Is the bottom of the boiler insulated **Yes**

Largest internal dia. of boilers **14'-6-3/16"** Length **11'-9" ext.** Shell plates: Material **O.H. Steel** Tensile strength **29-33 tons**

Thickness **1-13/32"** Are the shell plates welded or flanged **No** Description of riveting: circ. seams {end **double**  
inter **4-3/16" approx.**

long. seams **treble riveted double butt straps** Diameter of rivet holes in {circ. seams **1 1/2"** Pitch of rivets {plate **10-1/16"**  
long. seams **1 1/2"** rivets **---**

Percentage of strength of circ. end seams {plate **64.2%** Percentage of strength of circ. intermediate seam {plate **---**  
rivets **47.6%** rivets **---**

Percentage of strength of longitudinal joint {plate **86.1%** Working pressure of shell by Rules **---**  
rivets **92.8%** combined **88.7%**

Thickness of butt straps {outer **1-3/32"** No. and Description of Furnaces in each Boiler **3 Morrison corrugated Stephen Gourlay end**  
inner **1-7/32"**

Material **O.H. Steel** Tensile strength **26 - 30 tons** Smallest outside diameter **41-9/16"**

Length of plain part {top **10"** Thickness of plates {crown **21/32"** Description of longitudinal joint **forge weld**  
bottom **10"** bottom **---**

Dimensions of stiffening rings on furnace or c.c. bottom **---** Working pressure of furnace by Rules **---**

End plates in steam space: Material **O.H. Steel** Tensile strength **26 - 30 tons** Thickness **1-7/16"** Pitch of stays **21" x 21"**

How are stays secured **double nuts & 6-3/4" x 1/4" washers each end** Working pressure by Rules **---**

Tube plates: Material {front **O.H. Steel** Tensile strength {**26 - 30 tons** Thickness **31/32**  
back **O.H. Steel** **26 - 30 tons** **13/16**

Mean pitch of stay tubes in nests **9.82"** Pitch across wide water spaces **8-1/4" x 14-1/2"** Working Pressure {front **---**  
back **---**

Girders to combustion chamber tops: Material **O.H. Steel** Tensile strength **29 - 33 tons** Depth and thickness of girder

**double 11" x 7/8"** Length as per Rule **34"** Distance apart **11"** No. and pitch of stays

in each **3 - 7-5/8"** Working pressure by Rules **---** Combustion chamber plates: Material **O.H. Steel**

Tensile strength **26 - 30 tons** Thickness: Sides **25/32"** Back **23/32"** Top **25/32"** Bottom **25/32"**

Pitch of stays to ditto: Sides **9" x 10-3/16"** Back **9" x 8 1/2" Cent. c.c. Top 7-5/8" x 11"** Are stays fitted with nuts or riveted over **nuts**

Working pressure by Rules **---** Front plate at bottom: Material **O.H. Steel** Tensile strength **26 - 30 tons** Thickness **31/32"**

Lower back plate: Material **O.H. Steel** Tensile strength **26 - 30 tons** Thickness **29/32"**


Pitch of stays at wide water space **9" x 14-1/2"** Are stays fitted with nuts or riveted over **nuts**

Working pressure **---** Main stays: Material **O.H. Steel** Tensile strength **28 - 32 tons**

Diameter {At body of stay **3 1/2"** No. of threads per inch **6** Area supported by each stay **---**  
or **3 3/4"** Over threads **---**

Working pressure by Rules **---** Screw stays: Material **O.H. Steel** Tensile strength **26 - 30 tons**

Diameter {At turned off part, **1.606** No. of threads per inch **9** Area supported by each stay **---**  
or **1 3/4"** Over threads **---**

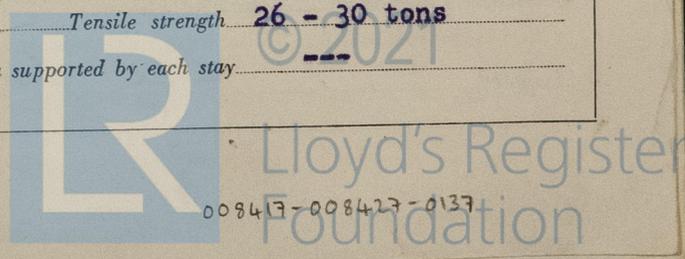

00947-008427-0137

Working pressure by Rules. --- Are the stays drilled at the outer ends. **No** Margin stays: Diameter { At turned off part, **1.856"** or Over threads **2"**

No. of threads per inch. **9** Area supported by each stay. --- Working pressure by Rules. ---

Tubes: Material. **O.H. Steel** External diameter { Plain **3"** Stay **3"** Thickness { **.16** **3/8" & 5/16"** No. of threads per inch. **9**

Pitch of tubes. **4-1/8" x 4-1/4"** Working pressure by Rules. --- Manhole compensation: Size of opening in end plate. **16" x 12"** Section of compensating ring. --- No. of rivets and diameter of rivet holes. ---

Upper **4-1/4"** Lower **3-1/2"** Steam Dome: Material. ---

Outer row rivet pitch at ends. --- Depth of flange if manhole flanged. ---

Tensile strength. --- Thickness of shell. --- Description of longitudinal joint. ---

Diameter of rivet holes. --- Pitch of rivets. --- Percentage of strength of joint { Plate. --- Rivets. ---

Internal diameter. --- Working pressure by Rules. --- Thickness of crown. --- No. and diameter of stays. ---

Inner radius of crown. --- Working pressure by Rules. ---

How connected to shell. --- Size of doubling plate under dome. --- Diameter of rivet holes and pitch of rivets in outer row in dome connection to shell. ---

Type of Superheater. **"ELESCO" Smoke Box Type** Manufacturers of { Tubes. **National Tube Co.** Steel forgings. **Pittsburgh** Steel castings. **Penna.**

Number of elements. **58** Material of tubes. **S.D. Steel** Internal diameter and thickness of tubes. **.69" .095" (B.B.W.G.)** Min.

Material of headers. **O.H. Steel** Tensile strength. **33.5 tons** Thickness. **1-1/8" min.** Can the superheater be shut off and the boiler be worked separately. **No** Is a safety valve fitted to every part of the superheater which can be shut off from the boiler. **Yes**

Area of each safety valve. **1.75 sq. in.** Are the safety valves fitted with easing gear. **Yes** Working pressure as per Rules. --- Pressure to which the safety valves are adjusted. **220 lbs. per sq. inch.** Hydraulic test pressure: tubes **2500 lbs. per sq. in.** forgings and castings **550 lbs. per sq. in.** and after assembly in place. **steam test** Are drain cocks or valves fitted to free the superheater from water where necessary. **yes**

Have all the requirements of Sections 14 to 22 inclusive for boilers been complied with. **yes**

The foregoing is a correct description,  
**VANCOUVER IRON WORKS LTD** Manufacturer.

Dates of Survey while building { During progress of work in shops. **November 2, 4, 5, 6, 9, 11, 16, 17** Are the approved plans of boiler and superheater forwarded herewith. **Yes, Approved plans in U.K.** (If not state date of approval) During erection on board vessel. **Nov. 26, December 4, 9, 19, 21, 28; Jan. 4, 5,** Total No. of visits. **16**

Is this Boiler a duplicate of a previous case. **Yes** If so, state Vessel's name and Report No. **S.S. "FORT CHILCOTIN" Ver. Report No. 5764.**

**GENERAL REMARKS** (State quality of workmanship, opinions as to class, &c.)

**These boilers have been constructed under Special Survey of tested materials in accordance with the approved plans, New York letters and otherwise in conformity with the Society's Rules. On completion the boilers were satisfactorily tested under hydraulic pressure to 380 lbs. per square inch. They were fitted on board under Special Survey, examined under working conditions, safety valves adjusted under steam to the working pressure and a satisfactory accumulation test carried out.**

**Cross seams of both end plates are fusion welded by Union Melt Process, stress relieved under survey. Welds ground flush both sides of plate, combustion chamber wrapper plate welded to back tube plate and combustion chamber back plate, wrapper plate butts also welded, all by Union Melt Electric Process.**

**Furnaces hand electric welded to back tube plate, all welding ground flush on both sides and tested as per Rule.**

Survey Fee ... **\$150.00** : } When applied for **7th Jan. 1943.** *RL*  
 Travelling Expenses (if any) **\$ 15.00** : } When received **19**

*RL*  
 Engineer Surveyor to Lloyd's Register of Shipping.

**FRI. 28 JAN 1944**

Committee's Minute.....  
 Assigned..... *See for marks vll.*

