


22-582

Do the Frames extend to the top Height in the Poop? *Yes*
Do the Frames extend to the top Height in the Poop? *Yes*
To what Height do the Reverse Frames extend? *Deep Channel Framing*
Has the Poop an efficient Iron Bulkhead at the fore end? *Yes*
Give particulars of the means for closing the openings in Bulkhead *5'x2' Stl hinged WT door*
Is the Poop connected with the Bridge House? *No*
Give particulars of the means for closing the openings in Bulkhead *No openings*
What is the thickness of the Bridge Front plating? *7/16* and Coaming plate? *7/16*
Give scantlings and spacing of the Stiffeners *10 x 3 1/2 x 21.7" E 30" apart*
Are bracket plates fitted at each end of the Stiffeners? *6x6" lugs*
Has the Bridge House an efficient Iron Bulkhead at the after end? *Yes*
How are the openings closed? *Two stl hinged WT doors 5'x2'*
Is the Forecastle at least as high as the main or top-gallant rail? *Yes*
Are the Engine and Boiler openings covered by a Bridge, Poop, or enclosed by a Strong Iron or Steel Deckhouse? *Covered by Bridge D^o*
If the openings are not so protected are the exposed parts of the Casings efficiently constructed? *Yes*
Give thickness of plating; scantlings and spacing of Stiffeners *✓*
What is the height of the exposed Casings? *✓*
Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below: *Yes*

Position and Size.		No. 1 15'10" x 12'7" (766)		No. 2 24'7" 18'1" x 23'10"		No. 3 4'5" 6 15'1" x 27'10"			
Item.		Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
COAMING	Above top of DECK	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2	2 1/2		
	Sides	1/2	1/2	1/2	1/2	1/2	1/2		
	Ends	1/2	1/2	1/2	1/2	1/2	1/2		
SCANTLING BEAMS OR WEL PLATES	Number								
	Section and Scantlings								
	Material								
WEL AND PLATES	Number	2	2	4	4	5	5		
	Section and Scantlings	15x46	do	15x46	do	15x46	do		
	Material	Stal		Stal		Stal			
HATCHES THICKNESS		2 3/4	2 1/2	2 3/4	2 3/4	2 3/4	2 3/4		
Remarks		Pine	Pine	Pine	Pine	Pine	Pine		

* When the Fore and Afters are of wood the depth should be stated from the underside of the plates.
(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

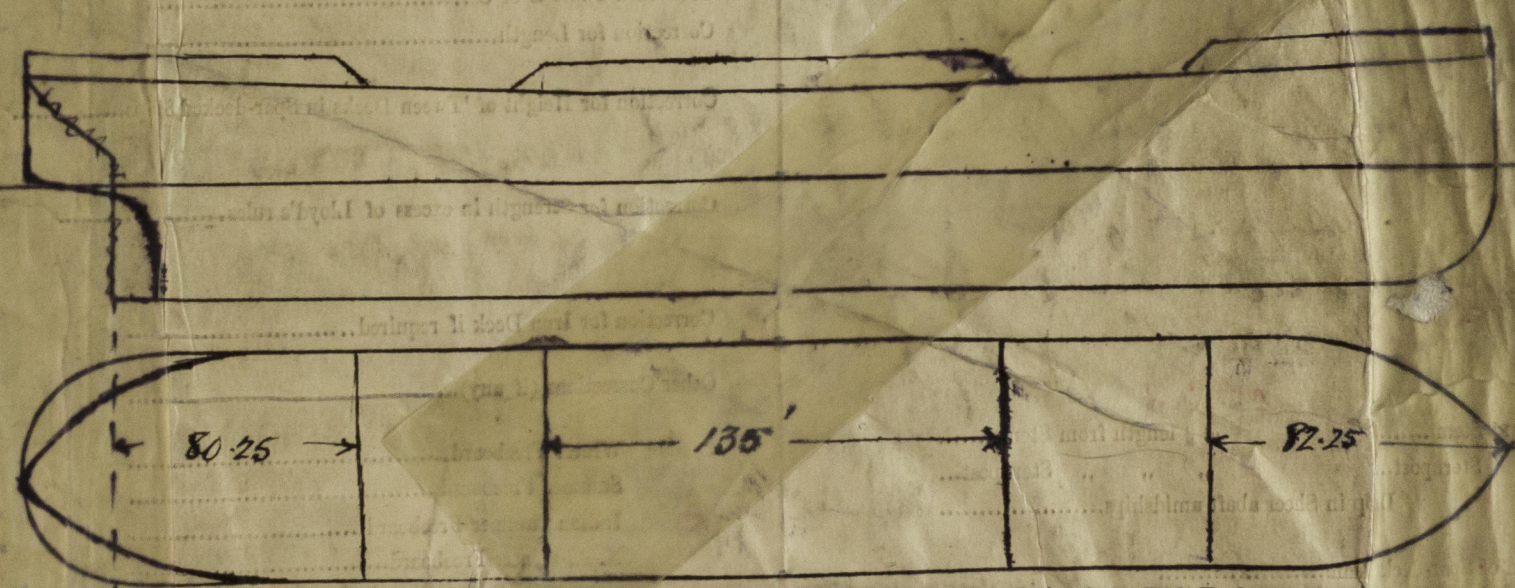

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel. *Copies of the approved plans are in the Office. The Request Form sent 30/9/19. See R.R. letter dated Oct 11th 1919.*
Plan showing location of scupper appd 23/10/19.
The owners desire a Fairboard corresponding to a draft of 28 ft plan.
See my letter dated 7/10/19.
See also Prelim. Rpt. P.N. N^o 3394.

Owners
Address
Fee £ 50⁰⁰ will be charged on F.R. Rpt