

as per Rule 408 mm ✓ Intermediate Shafts, diameter as per Rule 329 mm ✓ Thrust Shaft, diameter at
as fitted 430 mm ✓ as fitted 352 ✓
D.L. as per Rule ✓ Is the tube shaft fitted with a contr

Engine No. 4828 Made by Fried. Krupp


Rotterdam Dry Dock Co.'s Yard No. 189.

Ham. Report No. 21532

It is submitted that a copy of this Report be
forwarded ~~returned~~ to the Rot. Surveyors for their
guidance and for completion.

Cover sent
1/6/35

Date

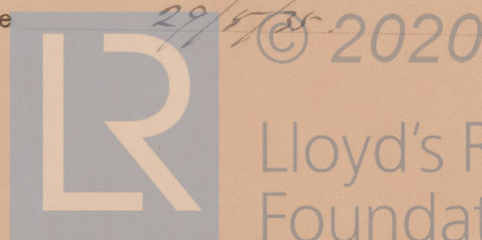

from easily accessible mud-boxes, placed above the level of the working floor, with straight tail pipes to the bilges

all Sea Connections fitted direct on the skin of the ship

Are they fitted with Valves or Cocks