

ARTICULARS OF WATER BALLAST.—

M/S "WASHINGTON EXPRESS"

GOT. REP. No 9514.

Please attach to back of first entry report

Where Fitted.

Double bottom, aft, _____

Double bottom, under Engines and Boilers, _____

Double bottom, if under Engines only, *O.F. & W.B.*

Double bottom, if under Boilers only, _____

Double bottom, forward, *O.F. & W.B.*

Coaming oil tank under Engines 19 feet, 24 tons oil.

Coaming oil tank " " 21 " 20 "

Sh water tank " " 14 " 22 " F.W.

*Length. Feet.	Water Capacity. Tons.
49	115
109	312
Total capacity of double bottom	427

* The wells are not to be included in the lengths of the tanks.

Where Fitted.

Fore peak tank, _____

After peak tank, _____

Deep tank *saft*, _____

Deep tank, forward, _____

Other tanks, if fitted, _____

(If necessary, furnish further information by sketch.)

O.F. & W.B.

*Length. Feet.	Water Capacity. Tons.
109	35
	60
	695

Lloyd's Register
Foundation

S. Townshend


5800-556200-446200

Committee's Minute

Character assigned

Gregors are requested not to write on or below the Committee's Minute.

9.1.34.

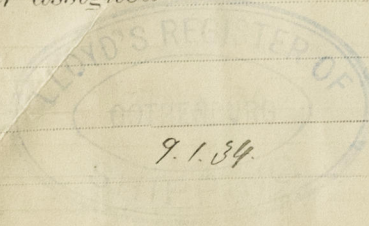

© 2020

Lloyd's Register
Foundation