

Lloyd's Register of Shipping.
SURVEYS FOR FREEBOARD.
(CONDITIONS OF ASSIGNMENT.)

Ship's Name "ELLIDÍ"

Port of Survey Hull.


Official Number

Surveyor's Signature J. Macleod

Nationality and Port of Registry Icelandic. SIGLUFJÖRDUR

Date of Survey During construction


Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

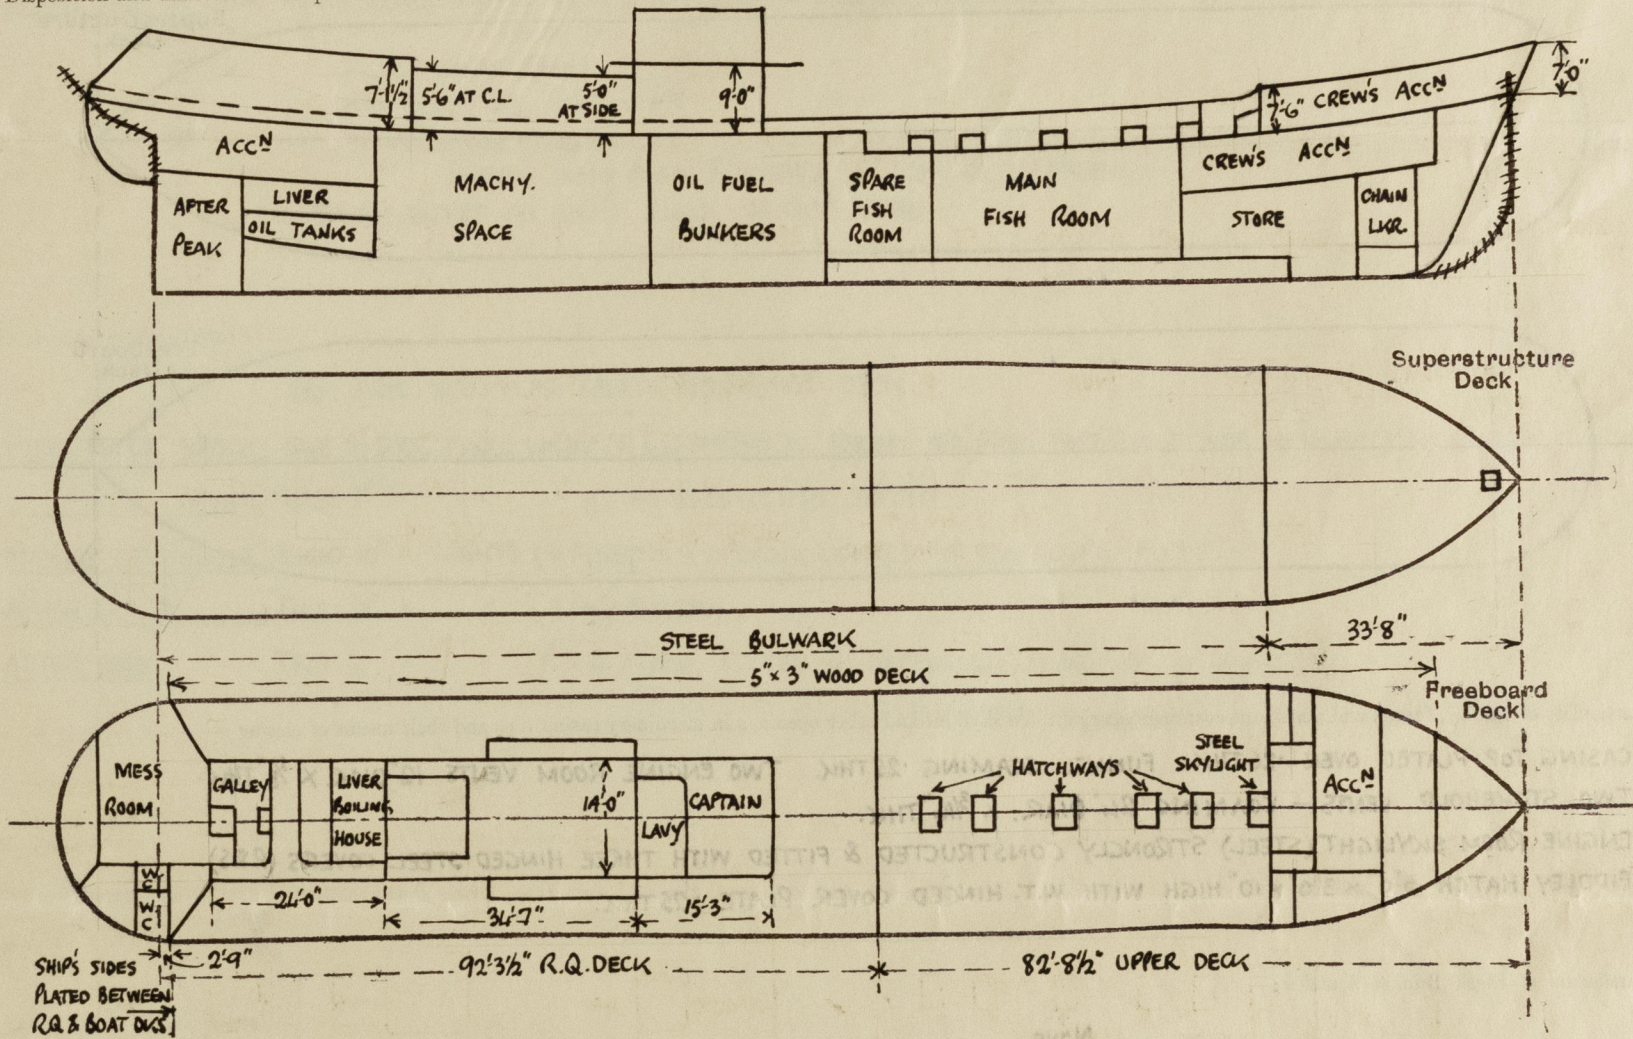

Particulars of Superstructures, Trunks, Casings, Deckhouses.								
	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead	✓	✓						
Raised Quarter Deck Bulkhead ...	15" x 375	✓	3 PL. BKTS.	ONE ON C.L. " 6'9" OFF CR (P. & S)	✓	✓	✓	12"
Bridge, After Bulkhead	✓	✓						
Bridge, Forward Bulkhead	✓	✓						
Forecastle Bulkhead	✓	25	2 1/2" x 2 1/2" x 25T	30"	NONE	4'6" x 1'10"	1'7" ABOVE WOOD DECK	7'0" TO 7'6"
Trunk, Aft	✓	✓						
Trunk, Forward	✓	✓						
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	31	31	3 1/2 x 2 1/2 x 30 T	29" TO 36"	BKTS. AT TOP	NONE	✓	5'0" ABOVE WOOD DECK
Exposed Machinery Casings on Superstructure Decks	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	✓							
Deckhouses on Flush Deck Ships ...	✓							
Particulars of Closing Appliances (state if capable of being manipulated from both sides).								
Poop Bulkhead	✓							
Raised Quarter Deck Bulkhead ...	NO OPENINGS							
Bridge, After Bulkhead	✓							
Bridge, Forward Bulkhead	✓							
Forecastle Bulkhead	THREE STEEL DOORS (HINGED). SILLS 1'7" ABOVE WOOD DECK. DOORS OPERATED FROM BOTH SIDES.							
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ..	NO OPENINGS							
Exposed Machinery Casings on Superstructure Decks	✓							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	✓							
Deckhouses on Flush Deck Ships ...	✓							



The following diagrams should be used to indicate the positions of cargo and coaling hatchways, gangway, cargo and coaling ports, ventilators, companionways, etc., which would affect the seaworthiness of the ship :—

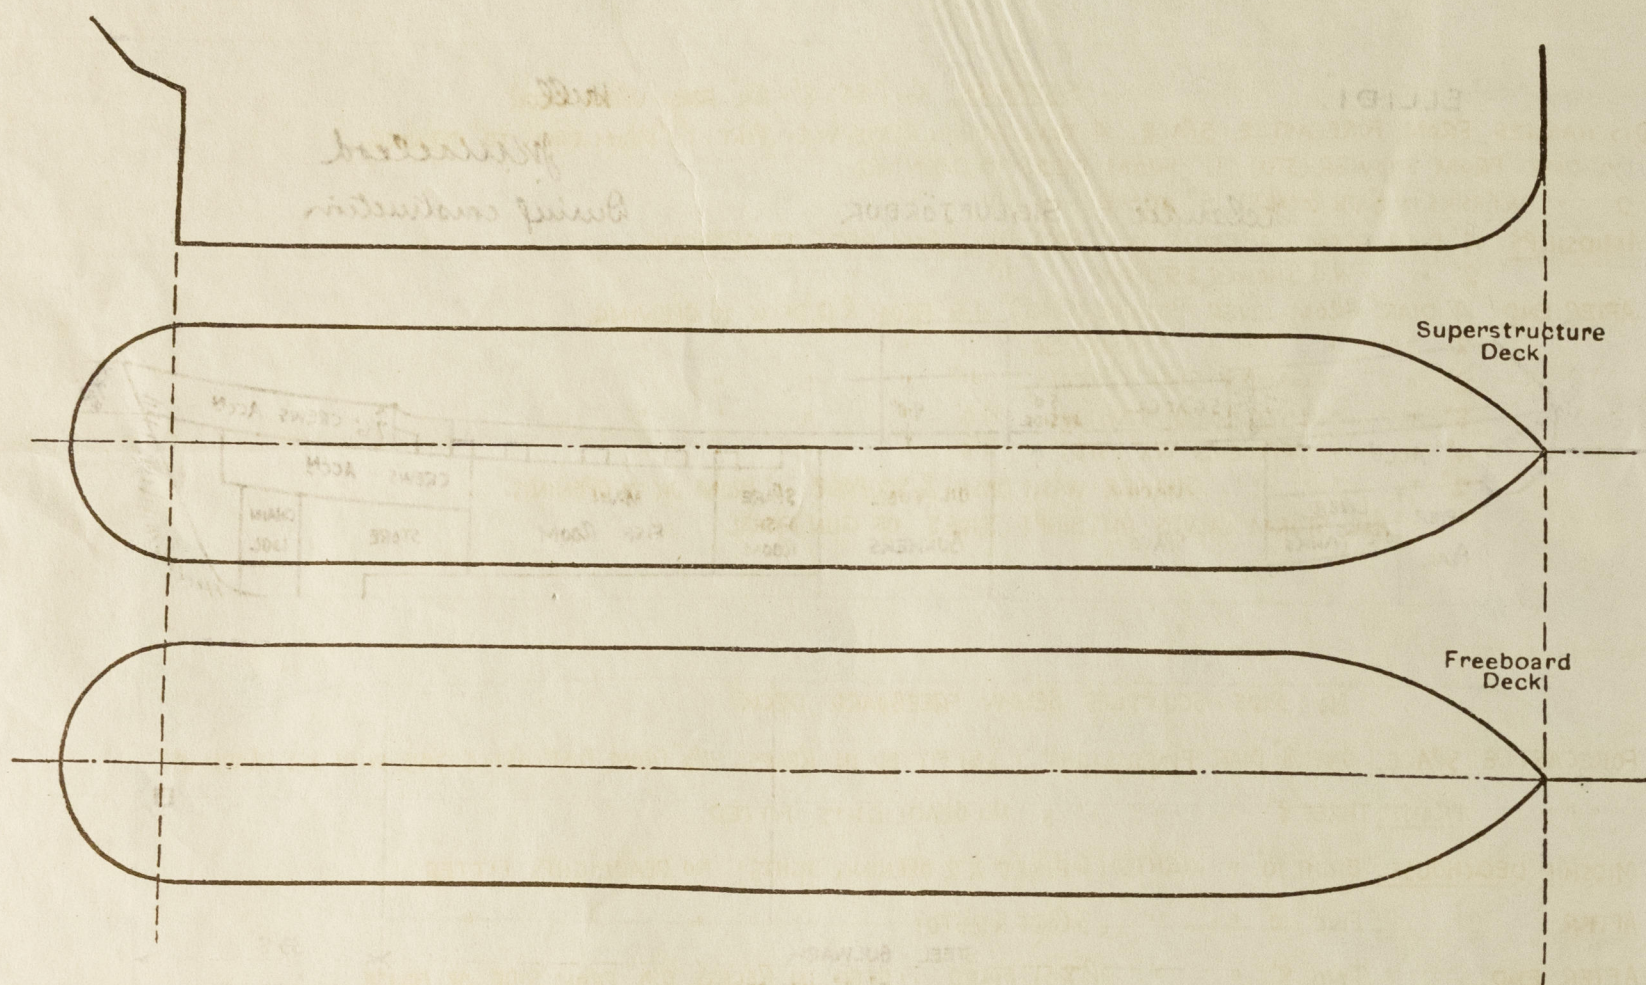

Particulars of Flush Bunker Scuttles :—

NONE

Particulars of Companionways :—

Particulars of Ventilators in exposed positions on freeboard and superstructure decks :— FORECASTLE DECK.

BOAT DECK					
13" DIAR.	FRENCH	HEAD	VENT. (EXHAUST)	COAMING	2'7" x .375
10" "	"	"	" (")	"	2'8" x .32
13" "	"	"	" (FAN INLET)	"	2'8" x .375
7" "	"	"	" (EXHAUST)	"	2'4" x .32

Particulars of Air Pipes in exposed positions on freeboard, raised quarter, or superstructure decks :— UPPER DECK.

PROTECTION OF DECK PLATING ON PROCEEDING, TAILST QUARTER, OR SUPERSTRUCTURE DECKS :-										UPPER DECK.
TO F.W.TANK - 2 1/2" DIAR. 3'-7" FROM DECK TO OPENING.										PROTECTED BY BULWARK.
FORWARD STORE - 3" " 3'-1" " " " " " " " " " " " "										
No 1 BOILER FEED TANK (P) 2 1/2" DIA. 3'-4" " " " " " " " " " " " "										EFFICIENT MEANS PROVIDED FOR CLOSING THE OPENINGS OF ALL AIR PIPES.
No 2 " " " (S) " " 3'-4" " " " " " " " " " " " "										
" 3 (5 (P), 4 (6 (STD) " " 3'-3" " " " " " " " " " " " "										
R.Q. DECK. TO COFFERDAM (P.S.) 2 1/2" DIAR. 2'-6" FROM DECK TO OPENING.										
" AIR SPACE (") 2 1/2" " 2'-6" " " " " " " " " " " " "										
CENTRE O.F. TANK " 3" " 7'-3" " " " " " " " " " " " "										ATTACHED TO DECKHOUSE FRONT.
FORWARD WING TANK " 4" " 6'-10" " " " " " " " " " " " "										
AFTER " " 4" " 6'-10" " " " " " " " " " " " "										
CASING TOP	DIESEL OIL TANK	" 2 1/2" "	6" "	" "	" "	" "	" "	" "	" "	
R.Q. DECK	LIVER OIL TANK	" 2" "	2'-9" "	" "	" "	" "	" "	" "	" "	PROTECTED BY BULWARK.
CASING TOP	CR	" " "	2" "	6" "	" "	" "	" "	" "	" "	

Particulars of Gangway Cargo and Coaling Ports :—

NONE

"ELLIDI"

Particulars of Scuppers and Sanitary Discharge Pipes :— SCUPPERS. 6 (P. 85) 8" x 2½" FROM UPPER DECK. ✓

DISCHARGES FROM FORECASTLE SPACE, 4" DIAM FROM CREW'S W.C.s (PORT) 1'-1" FROM DECK TO OPENING, 1 1/2" DIAM. FROM SHOWER (STD) 11" FROM DECK TO OPENING. *open value*

* 2" " W.BASINS IN BATH ROOM(S) 5' ABOVE " " " Storm-value.

AFTER END 2" " " W.B. SHOWER, & SLOPPER 11" " " " "
A" DIAR FROM LIVER BOILER (PORT) 4'6" FROM R.Q. DECK TO OPENING.

2"	"	"	"	"	"	HOUSE SC.	11"	"	"	"	"	"
2"	"	"	"	"	"	GALLEY SINK (PORT)	11"	"	"	"	"	"
3"	"	"	"	"	"	LIVER BOILER STM. EXH.	4'-0"	"	"	"	"	"
4"	"	"	"	"	"	OFFICERS W.C. (STD)	1'-0"	"	"	"	"	"
2"	"	"	"	"	"	SHOWER, WASH BASIN & SCUPPER			11"	FROM DK TO OPENING.		

ALL STORM VALVES ON SHIP'S SIDES OF GUN METAL.

Particulars of Side Scuttles :—

NO SIDE SCUTTLES BELOW FREEBOARD DECK.

FORECASTLE SPACE ONE 8" DIAR. FIXED LIGHT (P. & S) FITTED IN RECESS 2½" FROM FORECASTLE SIDE WITH M.S. DEADLIGHT.

" FRONT. THREE 8" " " " S. NO DEADLIGHTS FITTED.

MIDSHIP DECKHOUSE. EIGHT 10" " LIGHTS (6 FIXED & 2 OPENING LIGHTS). NO DEADLIGHTS FITTED.

AFTER " " " " FIVE 10" " " (3 PORT & 2 STD) " " " "

AFTER END. TWO 8" " " (P & S). FIXED. FITTED IN RECESS 2 1/2" FROM SIDE OF HOUSE.

WITH M.S. DEADLIGHTS.

Vertical distance of Sill of lowest Side Scuttle above top of keel.

Particulars of Guard Rails :—

FORECASTLE. GUARD RAILS 3'-3" HIGH. 3 RODS. STANCHIONS SPACED 3'-9" APART.

Particulars of Gangways, Lifelines, etc. :—

LIFELINES ARE PROVIDED FORWARD AND AFT.

Particulars of Freeing Arrangements.						
	Length of Bulwark	Height of Bulwark	Size of Freeing Ports	Number each side	Area each side	Rule area each side
After Well } ..	141'-4"	3'-6½" IN WAY OF R.Q. DECK.	5 - 24" x 16" 1 - 18" x 12"	6	144.85 sq. ft.	17.9 sq. ft.
Forward Well } ..		4'-6½" IN WAY OF UPPER DECK	2 - 24" x 12" 1 - 12" x 12"			
State position of each freeing port { After Well :— FROM A.P. 4'-0" - 17'-3" - 30'-6" - 51'-0" - 66'-6" - 78'-6" - 93'-0" - 108'-0" - 120'-0"						
(F. and A. position and height above deck edge) { Forward Well :— 5" ABOVE DECK EDGE IN WAY OF UPPER DECK. - 9" IN WAY OF R.Q. DECK. ✓						
State whether the freeing ports are fitted with shutters, bars, or rails, and give particulars of such :— 7 (P.&S) FITTED WITH STEEL GRATING. RODS ¾" DIAR.						
Additional area where sheer is less than standard. 1 (") " " SLIDING PLATE COVER.						
1 (") " " BALANCED TYPE COVER. ✓						

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.									
← UPPER DECK → FORECASTLE DECK									
Description of Hatchway			Nº1	Nº2	Nº3	Nº4	Nº5	HATCH TO STORE	
Dimensions of Hatchway			3'9" x 3'9"	3'6" x 3'9"	5'0" x 3'9"	5'0" x 3'9"	6'6" x 3'9"	1'9" x 1'9"	
COAMINGS	{	Height above Deck ...	1'4"	1'4"	1'7"	1'7"	1'7"	7"	
		Thickness35	.35	.35	.35	.35	.40	
		Sides Ends							
		Stiffeners ...							
Brackets, Stays ...			← NONE →					NONE	
HATCH BEAMS	{	Number ...							
		Spacing ...							
		Scantling and Sketch ...	← NONE →					NONE	
Bearing Surface ...									
FORE AND AFTERS	{	Number ...							
		Spacing ...							
		Unsupported Lengths ...							
		Scantling* and Sketch ...	← NONE →					NONE	
Bearing Surface ...									
HATCH COVERS	{	Material ...			PINE			STEEL	
		Thickness ...	3" ✓	3" ✓	3" ✓	3" ✓	3" ✓	.30	
		How fitted ...	2 5/8" ✓	2 5/8" ✓	THWARTSHIPS 2 5/8" ✓	2 5/8" ✓	2 5/8" ✓	WT. HINGED COVER PLATE WITH 4 TOGGLES	
Bearing Surface ...									
Spacing of Cleats ...			24" ✓	24" ✓	24" ✓	24" ✓	24" ✓		
Number of Tarpaulins ...			2 ✓	2 ✓	2 ✓	2 ✓	2 ✓		
*Are wood fore and afters steel shod at all bearing surfaces? None ✓									
Are battens and wedges efficient and in good condition? Yes ✓									
Are tarpaulins in good condition and in accordance with rule requirements? Yes ✓									
Are lashings provided in accordance with rule requirements? Yes ✓									

Particulars of any special features :—

Endorsement at first survey and at surveys for renewal of Certificate :—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

ML-D

