

GOVT. COPY ISSUED

OWNERS' C.11 ISSUED

Lloyd's Register of Shipping.

Index No. 39008
(For London Office only.)


SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)

3-AUG-1929

Ship's Name **BRITISH PROGRESS** Port of Survey **GLASGOW.**
 Official Number **182916** Surveyor's Signature **Geo. Lockhart**
 Nationality and Port of Registry **BRITISH. LONDON** Date of Survey **WHILST BUILDING.**

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

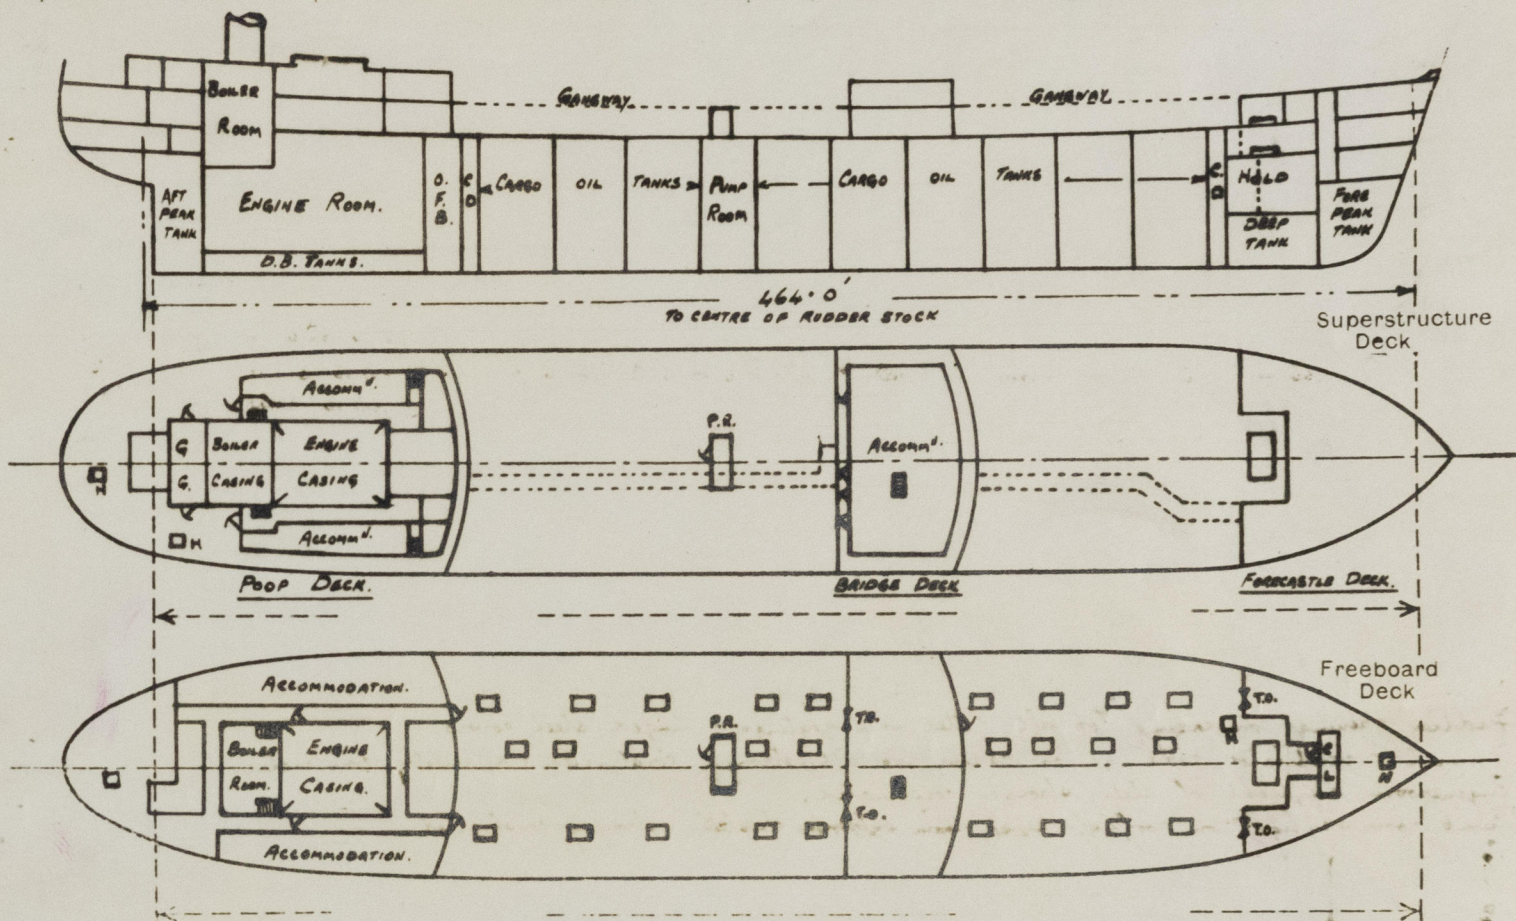

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead	44	44	9" x 3 1/2" = 46 O.A. E.W. TOE ON	30"	E.W. TOP & BOTTOM	2 AT 5'-0" x 3'-0"	18"	8'-0"
Bridge, After Bulkhead	30	30	4" x 9 1/2" PLAT. E.W.	30"	E.W. TOP & BOTTOM	2 AT 4'-1" x 3'-1"	19"	8'-0"
Bridge, Forward Bulkhead	44	44	9" x 3 1/2" = 46 O.A. E.W. TOE ON	30"	E.W. TOP & BOTTOM	1 AT 5'-0" x 3'-0"	18"	8'-0"
Forecastle Bulkhead	30	30	4" x 3" = 32 O.A. E.W. TOE ON	30"	E.W. TOP & BOTTOM	2 AT 4'-1" x 3'-1" 1 AT 4'-3" x 2'-3"	18"	8'-0"
Trunk, Forward								
Exposed Machinery Casings on Poop Deck or Raised Quarter Decks								
Exposed Machinery Casings on Superstructure Decks	30	30	8" x 5 1/2" FLAT E.W.	30"	BATS. TO BEAMS	2 AT 4'-3" x 2'-3"	18"	8'-3 1/2"
Machinery Casings within Superstructure not fitted with Closing Appliances								
PUMP ROOM ENTRANCE	40	40	4" x 3" = 36 O.A. E.W. TOE ON	24/30	E.W. TOP & BOTTOM	1 AT 4'-3" x 2'-3"	24"	7'-6"

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead	HINGED STEEL WATERTIGHT DOORS OPERATED BOTH SIDES
Bridge, After Bulkhead	STORMBOARDS IN WELDED CHANNELS & PORTABLE PLATES SECURED BY HOOK BOLTS.
Bridge, Forward Bulkhead	HINGED STEEL WATERTIGHT DOOR OPERATED BOTH SIDES.
Forecastle Bulkhead	1 HINGED STEEL WATERTIGHT DOOR OPERATED BOTH SIDES; STORMBOARDS IN E.W. CHANNELS & PORTABLE PLATES SECURED BY HOOK BOLTS.
Exposed Machinery Casings on Poop Deck or Raised Quarter Decks	
Exposed Machinery Casings on Superstructure Decks	HINGED STEEL WATERTIGHT DOORS OPERATED BOTH SIDES.
Machinery Casings within Superstructure not fitted with Closing Appliances	
PUMP ROOM ENTRANCE	HINGED STEEL WATERTIGHT DOOR OPERATED BOTH SIDES.

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.										POOP DECK	
UPPER DECK											
Description of Hatchway	Fore Hold.	Cargo Tanks	Fore Peak Store	Forward Tween Deck	Forward Pump Room	Oil Fuel Bunkers	Copper Bunkers	STEAM COMPARTMENT	POOP SPACE		
Dimensions of Hatchway	6'-9" x 10'-0"	8'0" x 4'-0"	3'-0" x 3'-0"	2'-6" x 2'-0"	3'-0" x 3'-0"	3'-0" x 3'-0"	28' x 18'	2'-6" x 2'-6"	2'-9" x 2'-9"		
COAMINGS	Height above Deck	30"	18"	9"	9"	36"	36"	18"	18"		
	Thickness	44	50	50	50	50	50	50	50		
	Stiffeners	44	50	50	50	50	50	50	50		
	Brackets, Stays										
HATCH BEAMS	Number										
	Spacing										
FORE AND AFTERS	Scantling and Sketch	← NONE →							← NONE →		
	Bearing Surface										
	Number	5'-0"									
	Spacing	6'-9"									
HATCH COVERS	Material	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	STEEL	WOOD	
	Thickness	60	64	50	50	50	50	40	50	2 1/2	
	How fitted	W.T.	O.T.	W.T.	W.T.	W.T.	O.T.	BOLTED O.T.	W.T.	P & A	
	Bearing Surface									2 1/2	
Spacing of Cleats	TOGGLES										
Number of Tarpaulins	14-16 APART. 14-16 APART. 17-18 APART. 15-18 APART. 18 APART. 17-20 APART. 3 1/2 APART. 12 APART. 2 PER SIDE.										

*Are wood fore and afters steel shod at all bearing surfaces? YES

Are battens and wedges efficient and in good condition? YES

Are tarpaulins in good condition and in accordance with rule requirements? YES

Are lashings provided in accordance with rule requirements?

Particulars of any special features:—



© 2020

Lloyd's Register Foundation