

## LLOYD'S REGISTER OF SHIPPING

UNITED WITH THE BRITISH CORPORATION REGISTER

Index No. \_\_\_\_\_  
(For London Office only.)

## SURVEYS FOR FREEBOARD.

(CONDITIONS OF ASSIGNMENT.)


CONVERSION TO OIL CARRIER.

Ship's Name "AVON JENTURER" Port of Survey CARDIFF.

Official Number 162646. Surveyor's Signature W. Henderson

Nationality and Port of Registry BRITISH. BRISTOL. Date of Survey 28th Oct 1955.

Disposition and dimensions of superstructures, trunks, deckhouses, machinery casings and wood sheathing to be inserted in the diagrams and tabular statement :-

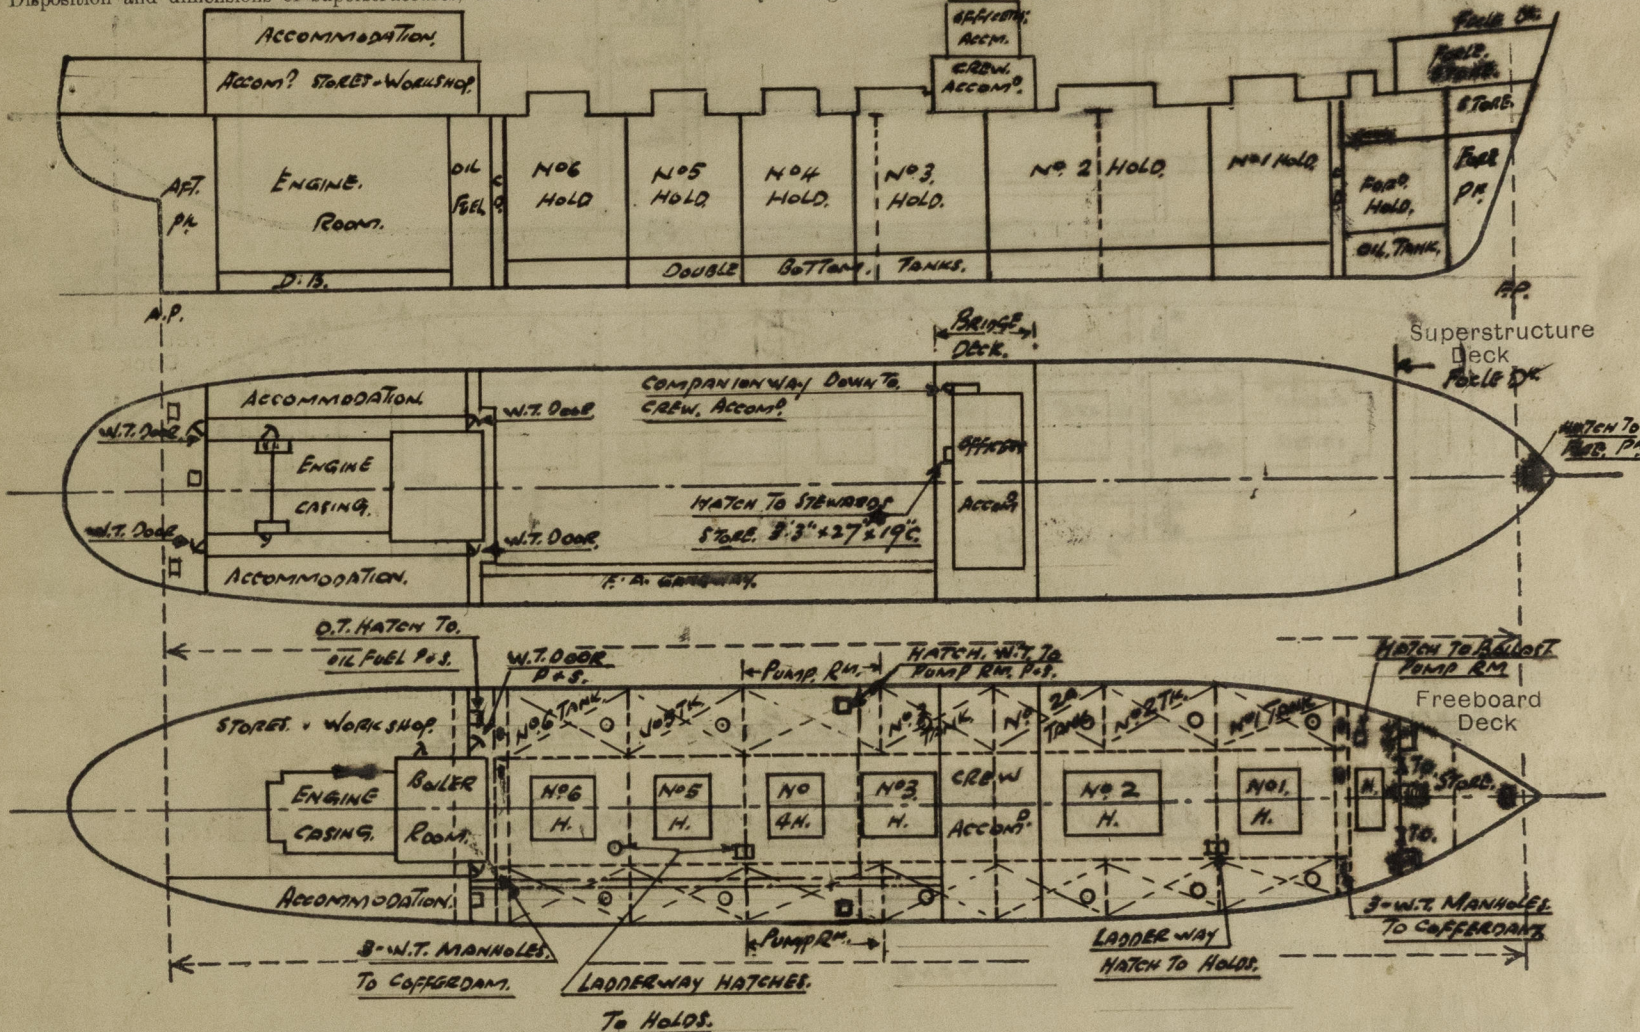

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height, Beam to Beam
Poop Bulkhead ...	.44. ✓	.44. ✓	9" x 2 3/4" x .50. B.A. ✓	2' 4"	LUGS.	2' 6" x 5' 0"	18"	7' 3"
Raised Quarter Deck Bulkhead ...	✓							
Bridge, After Bulkhead ...	.30 ✓	.30. ✓	3 1/2" x 2 1/2" x .30. ✓	2' 7"	NONE.	NONE.	✓	7' 3"
Bridge, Forward Bulkhead ...	.44. ✓	.40. ✓	9" x 3" B.A. ✓	2' 6" to 2' 9"	LUGS.	NONE.	✓	7' 3"
Forecastle Bulkhead ...	.25. ✓	.25. ✓	3" x 3" x .25. ✓	2' 3" x 2' 5"	NONE.	2' 9" x 2' 0"	15" x 24"	7' 3"
Trunk, Aft ...	✓							
Trunk, Forward ...	✓							
Machinery Casings on Freeboard or Raised Quarter Decks ...	.40. ✓	.30. ✓	3 1/2" x 2 1/2" x .40. ✓	2' 5"	IN WAOF BEAMS 2 RIVETS.	LARGE OPENING ACCESS TO WORKSHOP.	18.	7' 3"
Machinery Casings on Superstructure Decks ...	.40. ✓	.30. ✓	3 1/2" x 2 1/2" x .40. ✓	2' 5"	2 RIVETS.	2' 0" x 4' 9"	16"	7' 3"
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓ NOTE:- THE ABOVE ARE NOT EXPOSED WHEN W.T. DOORS IN POOP FRONT & HOUSE FRONT ARE CLOSED.							
Deckhouses and Pump Room Entrances	✓							

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	2. STEEL HINGED W.T. DOORS WITH 6 LEDGE CLIPS. OPERATED FROM BOTH SIDES. ✓
Raised Quarter Deck Bulkhead ...	✓
Bridge, After Bulkhead ...	NO OPENINGS. ✓
Bridge, Forward Bulkhead ...	NO OPENINGS. ✓
Forecastle Bulkhead ...	✓
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	TONNAGE OPENING. PANO 5. 5' 1" x 14' 1" 15" SILL WITH SLIP LUGS BARRIED. IN CHANNEL. ENTRANCE TO MAIN DECK SPACE. 4' 9" x 2' 0". 2 1/4" SILL. HINGED STEEL DOOR. OPERATED FROM BOTH SIDES. ✓
Machinery Casings on Superstructure Decks ...	2 WOOD DOORS. P.S. TO LAMP. PAINT. RNS. OPENINGS. 10' 11" x 2' 1". 15" SILL. DOORS OPERATED FROM BOTH SIDES. ✓
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	1 3/4" SOLID TEAK DOORS. OPERATED FROM BOTH SIDES. ✓
Deckhouses and Pump Room Entrances	✓







# PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.											
Description of Hatchway	...	...	...	...	...	...	...	...	...	...	...
Dimensions of Hatchway	...	...	...	...	...	...	...	...	...	...	...
COAMINGS	Height above Deck	...	...	...	...	...	...	...	...	...	...
	Thickness	...	...	...	...	...	...	...	...	...	...
	Sides	...	...	...	...	...	...	...	...	...	...
	Ends	...	...	...	...	...	...	...	...	...	...
HATCH BEAMS	Number	...	...	...	...	...	...	...	...	...	...
	Spacing	...	...	...	...	...	...	...	...	...	...
	Scantling and Sketch	...	...	...	...	...	...	...	...	...	...
	Bearing Surface	...	...	...	...	...	...	...	...	...	...
FORE AND AFTERS	Number	...	...	...	...	...	...	...	...	...	...
	Spacing	...	...	...	...	...	...	...	...	...	...
	Unsupported Lengths	...	...	...	...	...	...	...	...	...	...
	Scantling* and Sketch	...	...	...	...	...	...	...	...	...	...
HATCH COVERS	Material	...	...	...	...	...	...	...	...	...	...
	Thickness	...	...	...	...	...	...	...	...	...	...
	How fitted	...	...	...	...	...	...	...	...	...	...
	Bearing Surface	...	...	...	...	...	...	...	...	...	...
Spacing of Cleats	...	...	...	...	...	...	...	...	...	...	...
Number of Tarpaulins	...	...	...	...	...	...	...	...	...	...	...

\*Are wood fore and afters steel shod at all bearing surfaces? ☒

Are battens and wedges efficient and in good condition? ☒

Are tarpaulins in good condition and in accordance with rule requirements? ☒

Are lashings provided in accordance with rule requirements? ☒

Are wood covers fitted with galvanised end bands? ☒

ALL HATCHES, COVERS ON FREEBOARD, D<sup>4</sup>, STEEL, W.T. AND TURN BUCKLES.

Particulars of any special features:— (Timber Deck-cargo Fittings, Skylights, Sewage Systems, Ash Ejectors, Rubbish Shoots, etc.)

