

Provisional

21 MAR 1927

Index No. 32314
(For London Office only)

Lloyd's Register of Shipping

SURVEYS FOR FREEBOARD - STEAM SHIPS.

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Port of Survey Rotterdam
Date of Survey 21-3-27
Name of Surveyor

19/3/27

Ship's Name. Stoom Maatschappij "Nederland"
Port of Registry and Nationality. 490 ft Vessels.
Official Number.

Gross Tonnage. Date of Build. Particulars of Classification. To Class + 100 A1

Registered dimensions from Ship's Register.	LENGTH.	BREADTH.	DEPTH.	UNDER DECK TONNAGE.
Length on LOADLINE.		Frame Depth Rule	Ceiling Sheer	Peak Tanks
CORRECTED DIMENSIONS.	<u>490</u>	<u>61</u>		

Moulded Depth as measured..... 36'-9"
Addition for Keel below base line for draught record..... inches.

NOTE. - If the depth is measured when vessel is afloat, the details of measurement should be reported.

CORRECTION FOR LENGTH

Length of Ship on Loadline.....	<u>490.00</u>
Length in Table	<u>441</u>
Difference	<u>49</u>
Correction for 10ft., Table A.	<u>1.7</u>
× Difference divided by 10	<u>8.33</u> (if required.)
If 1/10ths length covered divide by 2	<u>+ 8 1/4</u>
Table C.	<u>8</u>
(if required.)	<u>3.92</u>
	<u>+ 4</u>

CORRECTION FOR IRON DECK.

Proportion covered, if less than 1/10ths length covered5546

Thickness of usual wood deck, less stringer 3 1/4"

2 3/4" Teak wood sheathing where exposed = 3" mean

3 1/4" sheathing assumed in erection

3 1/4"
3"
1/4 x .55

CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships..... 60-6

Round of Beam 15"

Normal round..... 15.15

Difference 15 ÷ 2 = .07

Proportion of Deck uncovered (Para. 19)45

NOTE. - The round of beam should be reported on the full breadth of vessel at the gunwale.

Freeboard, Table A	<u>10'-2 1/2"</u>
Correction for Sheer	<u>- 9 1/4"</u>
Correction for Length	<u>+ 8 1/4"</u>
Allowance for Deck Erections	<u>10'-1 1/2"</u>
Correction for Round of Beam.....	<u>- 1'-0"</u>
Correction for fall in Sheer (if any).....	<u>9'-1 1/2"</u>
Correction for Steel Deck (if required)	<u>✓</u>
Additions for non-compliance with provisions of Para. 11 (d) and (e) †	<u>✓</u>
Other Corrections (if any) <u>for 2 1/2" teak sheathing in lieu of 3" mean thickness</u>	<u>- 0 1/2"</u>
Winter Freeboard	<u>9'-1"</u>
Summer Freeboard	<u>8'-6"</u>
Indian Summer Freeboard	<u>7'-11"</u>
N. A. Winter Freeboard	<u>✓</u>

Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or steel deck with side. 1 3/4"

Winter Freeboard from deck line	<u>9'-2 3/4"</u>
Summer " " " "	<u>8'-7 3/4"</u>
Indian Summer " " " "	<u>8'-0 3/4"</u>
N. A. Winter " " " "	<u>✓</u>
Fresh Water Line above centre of Disc	<u>8'-8"</u>
Indian Summer Line " " " "	<u>7"</u>
Winter Line below " " " "	<u>7"</u>
Winter North Atlantic Line " " " "	<u>7"</u>

Co-efficient of fineness..... ± .75 Under Deck
Any modification necessary [Para. 4 (a) to (e)]*
Co-efficient as corrected swin .75

Sheer { Stem..... 129 }
at { Sternpost ... 57 } 186 ÷ 2 = 93 ... Mean

Sheer at 1/2 of the length from { Stem 76 }
{ Sternpost 34 } 110 ÷ 2 = 55 ... Mean

Gradual mean Sheer allowed 96.5 ÷ .55 = 100.0

Standard mean Sheer [Table, Para. 18] 59.00

Difference..... 37.5 ÷ 4 = 9.37

§ If limited as Para. 18 (f) - 9 1/4"

Rise in Sheer from amidships [Para. 18 (e)] { At front of bridge house..... 23" }
{ At after end of forecastle 88" }

Fall in Sheer Para. 18 (d) } ✓ ÷ 2 =

Length uncovered Correction

ALLOWANCE FOR DECK ERECTIONS :-

Freeboard, Table C.....	<u>10'-2 1/2" - 3'-2"</u>	<u>7'-0 1/2"</u>
Correction for Length, if required (Para. 12, 13, and 14)		<u>+ 4"</u>
Freeboard by Table A, corrected for sheer, and for length, if required (Para. 12, 13, and 14)		<u>7'-4 1/2"</u>
Difference		<u>10'-1 1/2"</u>
Percentage as below		<u>2'-9"</u>
		<u>36.37%</u>
		<u>12.00</u>

Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11) ✓

Allowance for Deck Erections 12"

Length.	Length allowed.	Height.
Forecastle.....	<u>54'</u>	<u>54.00</u>
Bridge House	<u>176'</u>	<u>176.00</u>
Raised Qr. Dk.....		<u>8.3</u>
Poop.....	<u>43'</u>	<u>41.74</u>
Total	<u>271.74</u>	<u>8-0</u>
Length of Ship	<u>490.00</u>	<u>5546</u>
Corresponding percentage (Para. 11, 12, 13, or 14) }	<u>36.37%</u>	

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Steel) Deck :-

If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible. In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R. Q. D. is to be taken from the level of the top of the amidship beam. In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and stern-post. In vessels having poops and forecastles, it means the sheer measured at points distant one-eighth of the vessel's length from stem and stern-post.

† State dimensions of freeing port area on back of this form.
‡ The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the usual load draft forward and aft should be reported.

Draft as desired = 28'-0" B.K. winter
= 28'-4 1/2" summer (M.C.)

© 2020 Lloyd's Register Foundation

003763-003768-0140

Do all the Frames extend to the top height in the Poop? Yes Raised Quarter Deck? Yes Bridge House? Yes Forecastle? Yes

To what height do the Reverse Frames extend? Yes

Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? Yes

Give particulars of the means for closing the openings in Bulkhead Hinged steel doors

Is the Poop or Raised Quarter Deck connected with the Bridge House? No Has the Bridge House an efficient Bulkhead at the fore end? Yes

Give particulars of the means for closing the openings in Bulkhead Hinged steel w.t. doors

What is the thickness of the Bridge Front plating? - and Coaming plate? -

Give scantlings and spacing of the Stiffeners

Are bracket plates fitted at each end of the Stiffeners? - Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? -

Has the Bridge House an efficient Iron Bulkhead at the after end? Yes

How are the openings closed? Hinged wood doors

Is the Forecastle at least as high as the main or top-gallant rail? Yes Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? No

Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? by bridge

If the openings are not so protected are the exposed parts of the Casings efficiently constructed?

Give thickness of plating; scantlings and spacing of Stiffeners

What is the height of the exposed Casings? - Are suitable means provided for closing all openings in them in bad weather? -

Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:—

Position and Size.		Ship.		Rule.		Ship.		Rule.		Ship.		Rule.	
Item.		Ship.	Rule.										
COAMING	Height above top of DECK												
	Thickness												
	Sides.....												
	Ends.....												
SHIFTING BEAMS OR WEB PLATES.	Number.....												
	Section and Scantlings.....												
	Material.....												
* FORE AND AFTERS.	Number.....												
	Section and Scantlings.....												
	Material.....												
HATCHES	Thickness.....												
Remarks.....													

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? - Strake between Main and Bridge Sheerstrakes? -

Delete the words that do not apply } The Crew are, are not, berthed in the bridge house.
 that do not apply } The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.

Length of Bulwarks in well

Area of Freeing Ports required by Para. 11 (e) each side of vessel = - Sq. ft.

Ft. Tenths. Ft. Tenths. No.


x x

Freeing Ports (each side of vessel) = - Sq. ft.

x x

Total deficiency or excess = - Sq. ft.

Poop
 closed
 $43.0 - 10.67 = 32.33$
 Sideways
 $10.67 \times 12.0 = 128.04$
 $\frac{128.04}{25.0} = 5.12$
 Centre house
 $8.0 \times 9.5 = 76.0$
 $\frac{76.0}{25.0} = 3.04$
 Total
 $32.33 + 5.12 + 3.04 = 40.49$
 overhang
 $40.49 + 1.25 = 41.74$
allowed

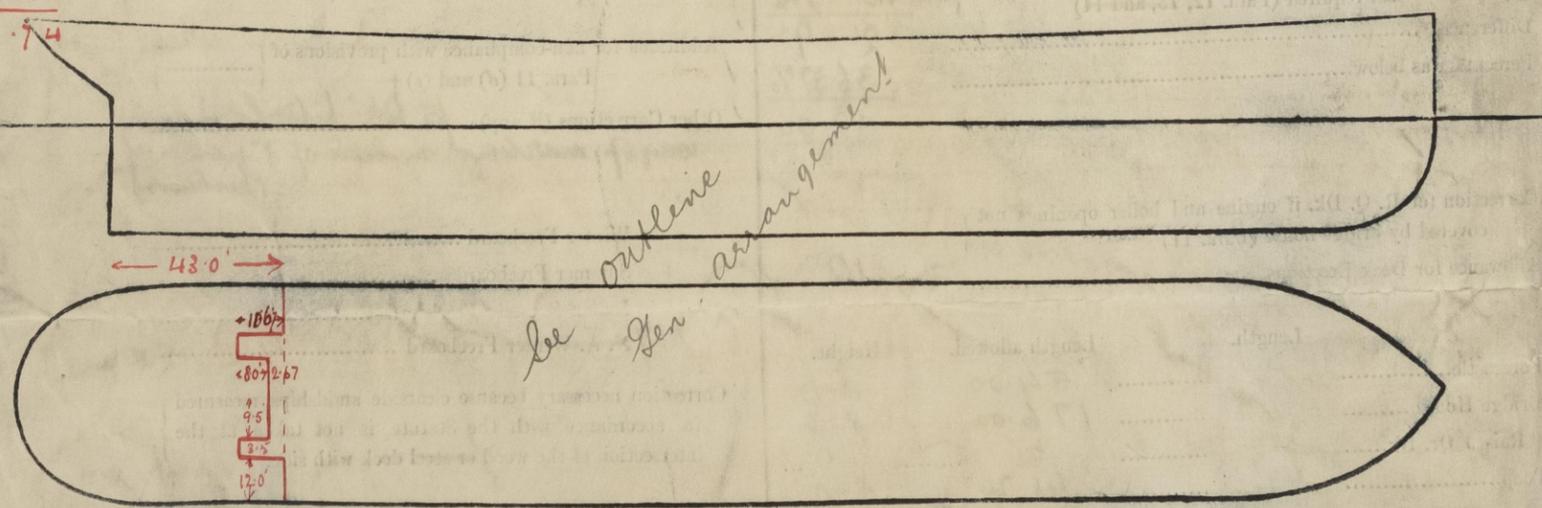

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel

Builder's name and yard number

Names of sister vessels

Owners

Address

Fee £ : : Received by me

