

37349

# Lloyd's Register of Shipping.

Ship's Name *S.S. "VALACIA"*Official No. *169124*

Memorandum of alterations reported since ship was surveyed for assignment of Load Lines in

The following alterations have been effected at this time:-

## VENTILATORS

3 Ventilators 18" in diameter fitted on Upper Deck in the following positions, in accordance with approved plan dated 21/3/50.

Fore. end of No. 2 hatch (S.S.)

After " " " (P+S)

Fore. " " No. 3 " (P.S.)

After " " " (P+S)

Fore. " " No. 3 " (P.S.)

After " " " (P+S)

Coaming of vent at fore. end of No. 2 hatch (S.S.) 7'-6" high, 7/16" thick.

" " " " " " No. 3 " (P.S.) 10'-6" " 7/16" - 3/8" thick.


The above vent coamings are specially stayed.

Remainder of coamings are 3'-0" high, 7/16" thick.

Wood plugs and canvas covers supplied to all vents.

2 Existing ventilators at after end of No. 2 hatch (1 P.S. + 1 S.S.) have been removed and openings in upper deck closed by means of welded spigot plates.

On completion of above alterations the deck was satisfactorily hose-tested.

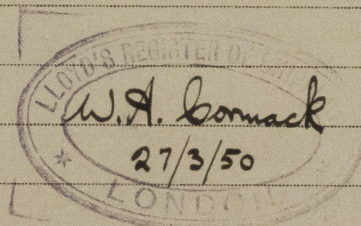

A copy of this report has been placed on board the ship.

G.H.W.

30 MAR 1950