

Glasgow Rpt No 70260

Index No. 3833  
(For London Office only).


# Lloyd's Register of Shipping.

## SURVEYS FOR FREEBOARD.

### (CONDITIONS OF ASSIGNMENT.)

Ship's Name **"EMPIRE KENT" EX "LEVANTE"**Port of Survey **GLASGOW.**Official Number **180796**Surveyor's Signature **Frederick V. Bell**Nationality and Port of Registry **LIVERPOOL**Date of Survey **10th December 1945.**

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

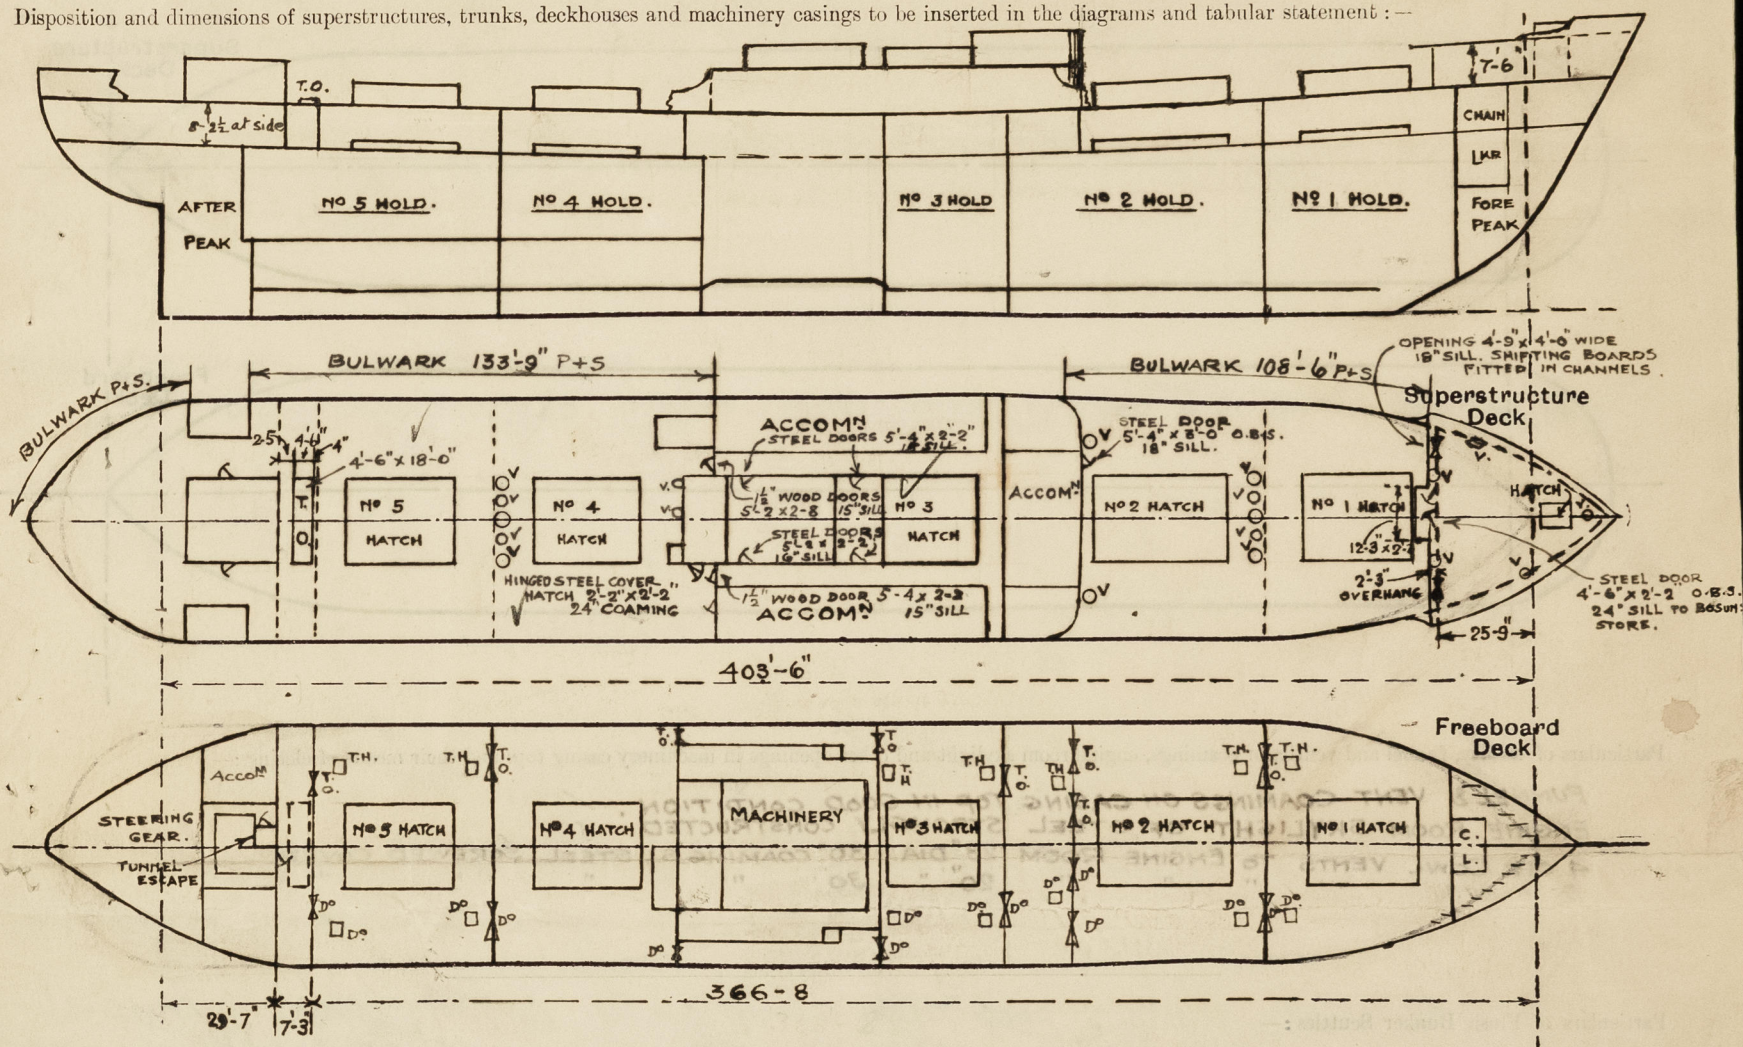

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead ...	.32	.32	3" x 3" x 30 ANGLE	2'-6"	E.W. TOP & BOTTOM.	4'-6" x 2'-0"	18"	9'-2 1/2" AT CENTRE.
Raised Quarter Deck Bulkhead ...								
Bridge, After Bulkhead ...	.36	.32	4" x 3" x 30 ANGLE	2'-4"	E.W. TOP & BOTTOM.	4'-3" x 3'-0"	24"	9'-2 1/2" AT CENTRE.
AND Bridge, Forward Bulkhead ...								
Forecastle Bulkhead ...								
Trunk, Aft ...								
Trunk, Forward ...								
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...								
Exposed Machinery Casings on Superstructure Decks ...								
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...								
Deckhouses on Flush Deck Ships ...								

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead ...	STEEL HINGED W.T. DOOR MANIPULATED BOTH SIDES 3 HANDLES EACH SIDE 1'-9" APART. ✓
Raised Quarter Deck Bulkhead ...	
Bridge, After Bulkhead ...	2 PORTABLE STEEL PLATES WITH HOOKED BOLTS. ✓
AND Bridge, Forward Bulkhead ...	
Forecastle Bulkhead ...	
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	
Exposed Machinery Casings on Superstructure Decks ...	
Machinery Casings within Superstructures not fitted with Class I Closing Appliances ...	✓
Deckhouses on Flush Deck Ships ...	



© 2020

Lloyd's Register  
Foundation

219930-9471100-3971100







### PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.												
FREEBOARD DECK												
SUPERSTRUCTURE DECK												
Description of Hatchway			No 1	No 2	No 3.	No 4	No 5.	No 1	No 2	No 3	No 4	No 5.
Dimensions of Hatchway			32'-0" x 18'-0"	39'-5" x 18'-0"	27'-0" x 18'-0"	32'-0" x 18'-0"	32'-0" x 18'-0"	32'-0" x 18'-0"	39'-5" x 18'-0"	27'-0" x 18'-0"	32'-0" x 18'-0"	32'-0" x 18'-0"
COAMINGS	{	Height above Deck						44"	44"	32"	32"	32"
		Thickness	9" x 3 1/2" x 9/20					48	48	48	48	48
		Sides						44	44	44	44	44
		Ends										
		Stiffeners						9 x 3 1/2 x 9/20 B.A.	9 x 3 1/2 x 9/20 B.A.	8 x 3 x 9/20 B.A.	9 x 3 1/2 x 9/20 B.A.	9 x 3 1/2 x 9/20 B.A.
HATCH BEAMS	{	Brackets, Stays						5	5	NIL	5	5
		Number	5-33'	7-8	4-9	5	5	5-33'	7-8	4-9	5-5	6-5
		Spacing	5-33'	4-93'	5-4'	6-5	6-5	5-33'	4-93'	5-4'	6-5	6-5
		Scantling and Sketch										
		Bearing Surface	3"	3"	3"	3"	3"	3"	3"	3"	3"	3"
FORE AND AFTERS	{	Number										
		Spacing										
		Unsupported Lengths										
		Scantling* and Sketch										
		Bearing Surface										
HATCH COVERS	{	Material	WOOD	WOOD	WOOD	WOOD	WOOD	WOOD	WOOD	WOOD	WOOD	WOOD
		Thickness	3"	3"	3"	3"	3"	3"	3"	3"	3"	3"
		How fitted	F+A	F+A	F+A	F+A	F+A	F+A	F+A	F+A	F+A	F+A
		Bearing Surface	3"	3"	3"	3"	3"	3"	3"	3"	3"	3"
Spacing of Cleats			23"	23"	23"	23"	23"	23"	23"	23"	23"	23"
Number of Tarpaulins			1	1	1	1	1	2	2	2	2	2

\*Are wood fore and afters steel shod at all bearing surfaces? ☒

Are battens and wedges efficient and in good condition? YES.

Are tarpaulins in good condition and in accordance with rule requirements? YES

Are lashings provided in accordance with rule requirements? YES.

TONNAGE OPENING IN SUPERSTRUCTURE DECK.		FORE PEAK HATCH ON FICLE DECK		TRIMMING HATCHES ON FREEBOARD DECK	
SIZE 4-6 x 18-0		4-0 x 3-6		2'-6" x 2'-6"	
HEIGHT OF COAMING 10 x 4 x 9/20 B.A.		30"		2" WOOD COVER	
HATCH COVERS		THICKNESS 44		OVER/ BOLTED. W.T	
MATERIAL WOOD		WOOD		PLATE	
THICKNESS 3"		3"		3 1/2" FLAT EL:	
HOW FITTED F+A		F+A		WELDED TO	
BEARING SURFACE 2 1/2"		2 1/2"		DK AS	
		SPACING CLEATS 24"		COAMING	
		NO OF TARPS 2			
		SECURING BAR FITTED.			

Endorsement at first survey and at surveys for renewal of Certificate :—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

