

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.


(CONDITIONS OF ASSIGNMENT.)

F.11

15 OCT 1946

Ship's Name **"PATELLA"** Port of Survey **BELFAST**
 Official Number **181531** Surveyor's Signature **A.S. Fletcher**
 Nationality and Port of Registry **BRITISH - LONDON.** Date of Survey **during construction.**

Disposition and dimensions of superstructures, trunks, deckhouses and machinery casings to be inserted in the diagrams and tabular statement:—

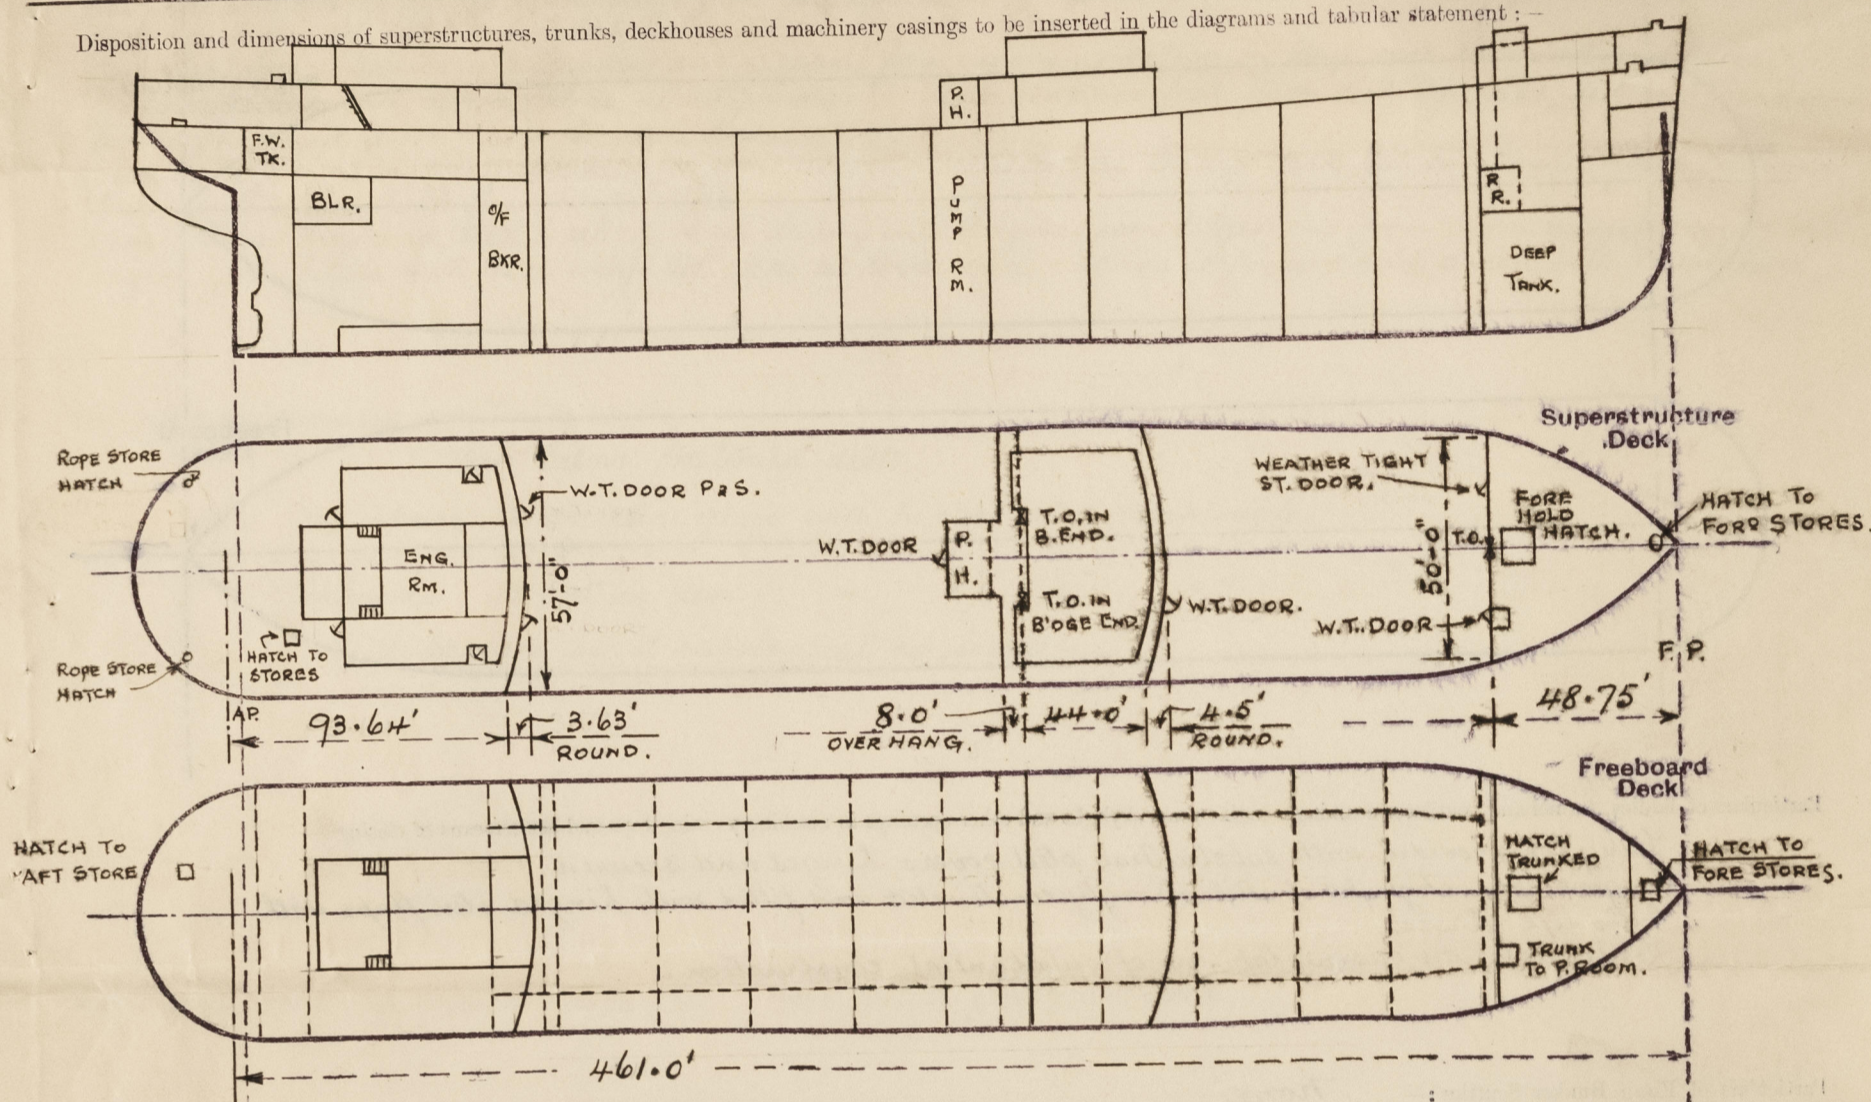

Particulars of Superstructures, Trunks, Casings, Deckhouses.

	Coaming	Plating	Stiffeners	Spacing	End Attachments of Stiffeners	Size of Openings	Height of Sills	Height of Casings
Poop Bulkhead44	.44	9"x4"x.50" O.A. welded toe on	26" to 33"	Welded top and bottom	2@5'-6"x30"	19 1/2"	7'-6"
Raised Quarter Deck Bulkhead ...	✓	✓						
Bridge, After Bulkhead32"	.32"	5"x.32" FLAT Welded	27" to 34"	Welded top and bottom	2@5'-3"x36"	18"	7'-6"
Bridge, Forward Bulkhead44	.44	9"x4"x.50" O.A. welded toe on	24" to 30"	-do-	1@5'-0"x30"	18"	7'-6"
Forecastle Bulkhead34"	.34"	5"x3/8" FLAT Welded	32"	-do-	1@5'-0"x48" 1@5'-0"x30" 1@5'-0"x24"	12" 18" 18"	7'-6"
Trunk, Aft	✓	✓						
Trunk, Forward	✓	✓						
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	✓	✓						
Exposed Machinery Casings on Superstructure Decks	not Exposed							
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	✓	✓						
Deckhouses on Flush Deck Ships ...	✓	✓						

Particulars of Closing Appliances (state if capable of being manipulated from both sides).

Poop Bulkhead	Two Watertight steel hinged doors operated from both sides
Raised Quarter Deck Bulkhead ...	✓
Bridge, After Bulkhead	Two portable steel plates secured by hooked bolts.
Bridge, Forward Bulkhead	One Watertight steel hinged door operated from both sides
Forecastle Bulkhead	one watertight steel hinged door operated from both sides.
Exposed Machinery Casings on Freeboard or Raised Quarter Decks ...	one Weatherlight
Exposed Machinery Casings on Superstructure Decks	one Portable stiffened steel plate secured by hooked bolts
Machinery Casings within Superstructures not fitted with Class I Closing Appliances	✓
Deckhouses on Flush Deck Ships ...	✓

PARTICULARS OF PROTECTION TO OPENINGS, ETC.

HATCHWAYS ON FREEBOARD AND SUPERSTRUCTURE DECKS.											
	Freeboard Deck					Roof deck		Forehold		Fore Store	
Description of Hatchway	9 Cargo Tanks	18 side Tanks	8 Coff'dams & Bunkers	Fore'd Stores	after Stores	Refrig Stores	2 Rope Scuttles	Fore Hold	Fore Store		
Dimensions of Hatchway	4'-0" dia	25" dia	23" x 18"	30" x 30"	3'-3" x 3'-3"	27" x 27"	12" dia	8' x 8'	19" x 14"		
COAMINGS	Height above Deck	2'-7"	6"	7"	9" BA	3"	6 1/2"	9" BA	2'-6 1/2"	9" BA	
	Thickness	40"	6 x 3 1/2" x 40"	7 x 3 1/2" x 42"	44"	44"	9 x 3 1/2" x 44"	44"	44"	44"	
	Sides										
	Ends										
HATCH BEAMS	Number										
	Spacing										
	Scantling and Sketch										
	Bearing Surface										
FORE AND AFTERS	Number										
	Spacing										
	Unsupported Lengths										
	Scantling* and Sketch										
HATCH COVERS	Material	Steel	Steel	Steel	Steel	W.P.	Steel	Steel	Steel	Steel	
	Thickness	50"	40"	44"	40"	3"	44"	38"	44"	46"	
	How fitted	Hinged	Bolted	Bolted	Hinged	plug.	Hinged	Strongback with Hook	6 x 3 x 32 B.A.	Hinged	
	Bearing Surface	O.T.	O.T.	O.T.	W.T.	3"	W.T.	toggle & joined W.T.	Hinged W.T.	W.T.	
Spacing of Cleats	18"	3 7/8"	3 7/8"	16"		15"					
Number of Tarpaulins											
*Are wood fore and afters steel shod at all bearing surfaces? ✓											
Are battens and wedges efficient and in good condition? ✓											
Are tarpaulins in good condition and in accordance with rule requirements? ✓											
Are lashings provided in accordance with rule requirements? ✓											

Particulars of any special features:—

Endorsement at first survey and at surveys for renewal of Certificate:—

The fittings and appliances are in accordance with the particulars shown on this form (or as now modified) and are in good condition.

ML-10



© 2020

Lloyd's Register Foundation