

LLOYD'S REGISTER OF SHIPPING

UNITED WITH THE BRITISH CORPORATION REGISTER

BOSE. 1963

48904

ALTERATIONS TO CONDITIONS OF ASSIGNMENT OF LOADLINES

Ship's Name "PADEREWSKI" Official No. -

Port of Registry GDYNIA


This ship has been under survey at SINGAPORE

on 13th July 1963 ~~195x~~ and the following alterations to the conditions of assignment of loadlines have now been effected/found:—

The Vessel has been converted to an open shelter decker and the following alterations verified:—

1. The tonnage hatch is provided with wood covers secured from below by hemp lashings.
2. The tonnage well is drained overboard by a 5" diameter S.D.N.R. Valve fitted (p & s) and geared to the shelter deck and fitted with indicators to show whether the valve is open or shut.
3. All other scupper valves and extended spindles found free and in good working order.
4. The Load Lines appropriate to the open shelter deck condition and set off from the second deck marked and verified correct. The previous load lines have been obliterated.

Noted
at
8-X-63

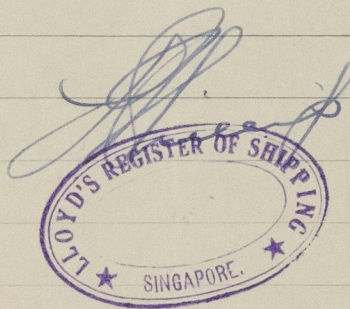

A copy of this Report has been placed on board.