

REPORT ON ELECTRICAL EQUIPMENT.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

6-DEC-1944

Received at London Office

Date of writing Report 25-11-44 When handed in at Local Office 2/12/44 Port of West Hartlepool

No. in Survey held at West Hartlepool Date, First Survey 19-10-44 Last Survey 24-11-44
Reg. Book. 89402 on the S/S "EMPIRE BERMUDA" (Number of Visits 6)

Tons Gross 3538.56 Net 2257.09

Built at West Hartlepool By whom built Wm. Gray & Co. Ltd Yard No. 1173 When built 1944

Owners The Ministry of War Transport Port belonging to West Hartlepool

Electrical Installation fitted by Wm Gray & Co. Ltd Contract No. 1173 When fitted 1944

Is vessel fitted for carrying Petroleum in bulk No. Is vessel equipped with D.F. Yes E.S.D. No Gy.C. No Sub.Sig. No

Have plans been submitted and approved Yes System of Distribution Two-Wire insulated Voltage of supply for Lighting 110

Heating Power 110 Direct or Alternating Current, Lighting Yes Power Yes If Alternating Current state periodicity Prime Movers,

has the governing been tested and found as per Rule when full load is suddenly thrown on and off Yes Are turbine emergency governors fitted with a

trip switch as per Rule Generators, are they compound wound Yes, are they level compounded under working conditions Yes

if not compound wound state distance between generators and from switchboard Where more than one generator is fitted are they

arranged to run in parallel No, are shunt field regulators provided Yes Is the compound winding connected to the negative or positive pole

negative Have machines over 100 kw. been inspected by the Surveyors during manufacture and testing Have certificates of

test for machines under 100 kw. been supplied Yes and the results found as per rule Yes Are the lubricating arrangements and the construction

of the generators as per rule Yes Position of Generators on raised flat aft of main engine

is the ventilation in way of generators satisfactory Yes are they clear of inflammable material Yes, if situated

near unprotected combustible material state distance from same horizontally and vertically are the generators protected from mechanical

injury and damage from water, steam and oil Yes, are the bedplates and frames earthed Yes and the prime movers and generators in metallic

contact Yes Switchboards, where are main switchboards placed on single frame work adjacent to generators

are they in accessible positions, free from inflammable gases and acid fumes Yes, are they protected from mechanical injury and damage from water, steam

and oil Yes, if situated near unprotected combustible material state distance from same horizontally and vertically, what insulation

material is used for the panels Heavy "Sindamip" if of synthetic insulating material is it an Approved Type Yes, if of

semi-insulating material (slate or marble) are all conducting parts insulated therefrom as per Rule Is the frame effectually earthed Yes

Is the construction as per Rule Yes, including accessibility of parts Yes, absence of fuses on the back of the board Yes, individual fuses

to pilot and earth lamps, voltmeters, etc. Yes locking of screws and nuts Yes, labelling of apparatus and fuses Yes, fuses on the "dead"

side of switches Yes Description of Main Switchgear for each generator and arrangement of equaliser switches a double-pole

single-throw quick-break knife switch and double-pole fuse; a double-pole

double-throw knife switch for supplying D.C. from either generator.

and for each outgoing circuit a double-pole, double-throw quick-break knife switch and

double-pole fuse.

Are compartments containing switchboards composed of fire-resisting material or lined as per Rule Yes Instruments on main switchboard Two

ammeters Two voltmeters synchronising devices For compound machines in parallel is the ammeter connected on the pole opposite to the

equaliser connection Earth Testing, state means provided 5 lamps connected in E through 500 ft fused.

Switches, Circuit Breakers and Fuses, are they as per Rule Yes, are the fuses an approved type Yes, are all fuses labelled as

per Rule Yes If circuit breakers are provided for the generators, at what overload current did they open when tested, are the reversed current


protection devices connected on the pole opposite to the equaliser connection, have they been tested under working conditions, and at what current

did they operate Joint Boxes, Section Boards and Distribution Boards, is the construction and position as per Rule Yes

Cables, are they insulated and protected as per the appropriate Tables of the Rules Yes, if otherwise than as per Rule are they of an approved type

state maximum fall of pressure between bus bars and any point under maximum load 7.66V, are the ends of all cables having a sectional area of 0.0

square inch and above provided with soldering sockets Yes Are paper insulated and varnished cambric insulated cables sealed at the ends Yes

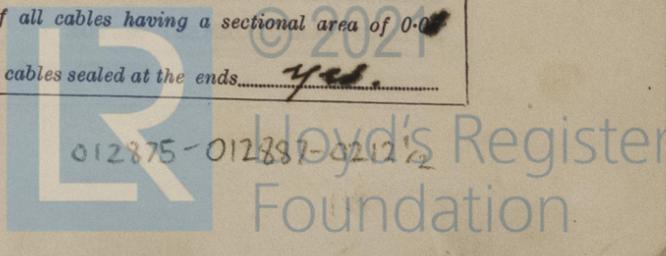

with insulating compound plastic tape - Damp proofing or waterproof insulating tape. Are all the cable runs in accessible positions, not exposed to drip or accumulation of water or oil, high temperatures or risk of mechanical damage. yes, are cables laid under machines or floorplates to, if so, are they adequately protected. —. Are cables in machinery spaces, galleys, laundries, etc., lead covered yes or run in conduit. —. State how the cables are supported and protected. In machinery spaces, along hatch coverings etc. V.C.L.C.A.B. cables clipped to steel trussing or perforated metal tray fastened to the surface. In accommodation L.C. cables clipped to the surface and protected as required by metal guards.

Are all lead sheaths, armoring and conduits effectually bonded and earthed. yes. Refrigerated chambers, are the cables and fittings as per Rule. yes. Are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands. yes, where unarmoured cables pass through beams, etc., are the holes effectively bushed. yes and with what material. lead. Alternative Lighting, are the groups of lights in the engine and boiler rooms arranged as per Rule. yes. Emergency Supply, state position. — and method of control. —

Navigation Lamps, are they separately wired. yes controlled by separate double pole switches. yes and fuses. yes. Are the switches and fuses in a position accessible only to the officers on watch. yes, is an automatic indicator fitted. yes. Secondary Batteries, are they constructed and fitted as per Rule. —, are they adequately ventilated. — what is the battery capacity in ampere hours. —

Fittings, are all fittings on weather decks, in stokeholds and engine rooms and wherever exposed to drip or condensed moisture, weatherproof. yes. Are fittings installed where readily combustible materials or inflammable or explosive dust or gases are likely to be present. yes, if so, how are they protected. D.P.S. "Disruption" flameproof lighting fittings as approved installed in permeable stoke and where are the controlling switches fitted. in forepeak, are all fittings suitably ventilated. yes, are all fittings and accessories constructed and installed as per Rule. yes. Searchlight Lamps, No. of. —, whether fixed or portable. —, are their fittings as per Rule. —. Heating and Cooking, is the general construction as per Rule. —, are the frames effectually earthed. —, are heaters in the accommodation of the convection type. —. Motors, are all motors constructed and installed as per Rule. yes and placed in well-ventilated compartments in which inflammable gases cannot accumulate and free from damage from water, steam and oil. yes, if situated near unprotected combustible material state minimum distance from same horizontally. — and vertically. —. Are motors coupled to oil fuel transfer and unit pressure pumps capable of being stopped from a position accessible in the event of fire in the pump compartment. —

Have motors of 100 BHP and over been inspected by the Surveyors during manufacture and testing. —. Have certificates of test for motors under 100 BHP intended for essential services been supplied and the results found as per Rule. —. Control Gear and Resistances, are they constructed and fitted as per Rule. yes. Lightning Conductors, where required are they fitted as per Rule. —. Ships carrying Oil having a Flash Point less than 150° F. Have all the special requirements of the Rules for such ships been complied with. yes, are all fuses of the cartridge type. yes are they of an approved type. yes. Are the fittings for pump rooms, 'tween deck spaces, etc., in accordance with the special requirements for such ships. yes. Are the cables lead covered as per Rule. yes. Spare Gear, if the vessel is for open sea service have spares been provided as per Rule. yes, are they suitably stored in dry situations. yes. Insulation Tests, has the insulation resistance of all circuits and apparatus been tested and found satisfactory. yes.

PARTICULARS OF GENERATING PLANT.

DESCRIPTION OF GENERATOR.	No. of	RATED AT				DRIVEN BY	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE.	
		Kilowatts.	Volts.	Ampères.	Revs. per Min.		Fuel Used.	Flash Point of Fuel.
MAIN	2	15	110	136.5	850	Single Cylinder Vertical Main Engines		
EMERGENCY								
ROTARY TRANSFORMER								

GENERATOR CABLES.

DESCRIPTION.	KILOWATTS.	CONDUCTORS.		MAXIMUM CURRENT IN AMPERES.		APPROX. LENGTH (lead plus return feet).	INSULATED WITH.	HOW PROTECTED.
		No. in Parallel Per Pole.	Sectional Area or No. and Dia. of Strands. Sq. ins. or sq. mm.	In the Circuit.	Rule.			
MAIN GENERATOR	15	1	19/064	136.5	136.5	214	V.C.	L.C.A.B.
" EQUALISER	15	1	19/064	136.5	136.5	40	V.C.	L.C.A.B.
EMERGENCY GENERATOR								
ROTARY TRANSFORMER: MOTOR								
" " GENERATOR								

MAIN DISTRIBUTION CABLES.

DESCRIPTION.	CONDUCTORS.		MAXIMUM CURRENT IN AMPERES.		APPROX. LENGTH (lead plus return feet).	INSULATED WITH.	HOW PROTECTED.
	No. in Parallel Per Pole.	Sectional Area or No. and Dia. of Strands. Sq. ins. or sq. mm.	In the Circuit.	Rule.			
AUX. SWITCHBOARDS AND SECTION BOARDS ... <u>Middle 5.B.</u>	1	19/064	57	135	468	V.C.	L.C.A.B.

LIGHTING AND HEATING, ETC., CABLES.

DESCRIPTION.	No.	Sectional Area or No. and Dia. of Strands. Sq. ins. or sq. mm.	In the Circuit.	Rule.	APPROX. LENGTH (lead plus return feet).	INSULATED WITH.	HOW PROTECTED.
WIRELESS	1	19/064	18	87	449	V.C.	L.C.A.B.
NAVIGATION LIGHTS	1	7/029	9	15	45	"	"
LIGHTING AND HEATING	<u>(Alternative supply from P.D. Switch in Wheelhouse)</u>						
Saloon DB.	1	7/064	18	75	21	V.C.	L.C.A.B.
Cargo DB.	1	7/064	14.6	75	21	"	"
Coal Cabin Fuel DB (off Main Aux. (P.D.))	1	7/064	12	75	60	"	"
Coal Store Fuel DB S.	1	7/064	8	75	42	"	"
" " " P."	1	7/064	35	75	84	"	"
Pump Room DB.	1	7/064	29	75	42	"	"
Eng. & Aux. Space DB	1	7/036	15	25	9	"	"
Eng. W.P. Supply	1	7/036	-	25	84	"	"

MOTOR CABLES.

ALL IMPORTANT MOTORS TO BE ENUMERATED.	No.	B.H.P.	Sectional Area or No. and Dia. of Strands. Sq. ins. or sq. mm.	In the Circuit.	Rule.	APPROX. LENGTH (lead plus return feet).	INSULATED WITH.	HOW PROTECTED.
Refrigerating Motor	1	2.5	4/052	22	57	498	V.C.	L.C.A.B.
No. 1 Thrust Pump	1	1.5	7/029	12	15	60	"	"
" 2	1	1.25	7/029	12	15	96	"	"
" 3	1	1.25	7/029	12	15	96	"	"

The Electrical Equipment is installed in accordance with the approved plans and the requirements of the Rules.

All Insulated Conductors are guaranteed to have been tested at the maker's works as specified in the Rules.

The foregoing is a correct description.

Ros. S. Simpson

Electrical Engineers.

Date 28th Nov. 1944.

COMPASSES.

Minimum distance between electric generators or motors and standard compass 176'

Minimum distance between electric generators or motors and steering compass 175'

The nearest cables to the compasses are as follows:—

A cable carrying 14 Ampères 7 feet from standard compass on the feet from steering compass.

A cable carrying 14 Ampères on the feet from standard compass 7 feet from steering compass.

A cable carrying Ampères feet from standard compass feet from steering compass.

Have the compasses been adjusted with and without the electric installation at work at full power yes

Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted yes

The maximum deviation due to electric currents was found to be nil degrees on every course in the case of the standard compass, and nil degrees on every course in the case of the steering compass.

Ros. S. Simpson

Builder's Signature.

Date 28th Nov. 1944.

Is this installation a duplicate of a previous case yes If so, state name of vessel S/S "Empire Walla"

Plans. Are approved plans forwarded herewith no If not, state date of approval 28.10.43

Certificates. Are certificates of test for ~~motors engaged on essential services and~~ generators forwarded herewith yes

General Remarks (State quality of workmanship, whether insulation tests, etc., have been made, opinions as to class, etc.)

The electrical equipment of this vessel has been installed under special survey in accordance with the approved plans and the Ministry of Shipping Specification and amendments thereto: The materials used are of good quality and design and the workmanship is good: On completion the equipment was operated under load with satisfactory results and the insulation resistance of each circuit was measured and found good: This equipment is in my opinion suitable for a classed vessel.

Noted

J.R.

12.12.44

Total Capacity of Generators. (2x15) 30 Kilowatts.

The amount of Fee... £22. 10. 0. When applied for, 5/12/1944
Specification 5.12.6
Travelling Expenses (if any) £ : : When received, 19.....

D. S. Ward
Surveyor to Lloyd's Register of Shipping.

Committee's Minute FRI. 15 DEC 1944

Assigned See fe machy rpt

5m.4.38.—Transfer. (MADE AND PRINTED IN ENGLAND.)
(The Surveyors are requested not to write on or below the space for Committee's Minute.)



© 2021

Lloyd's Register Foundation