


No. of bilge injections sizes 412 Connected to condenser, to circulating pump yes Is a separate donkey suction fitted in
the services on Engine room

Yinara.

Sir 6422

It is submitted that the Surveyor be informed that he should state in detail all the various articles of spare gear that are supplied

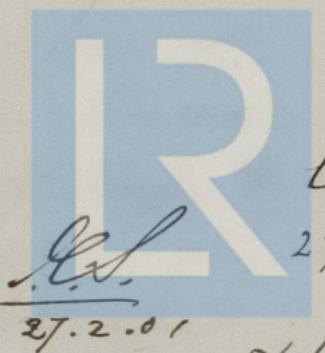

© 2020

BD
24.2.07
Lloyd's Register
Foundation

066831-06844-0252

Smallest distance between boilers or uptakes and bunkers or wooden

Thickness 1 1/2" Range of tensile strength 28-32 Are they welded or flanged not

Descrip. of riveting; cir. seams Laf. & stb.