


Sh. "D A R P O M O R Z E".

List of Spare Gear.

- 1 cylinder cover complete with valves, ready for use.
- 1 air inlet valve complete.
- 6 packing rings for do.
- 1 exhaust valve complete.
- 6 packing rings for do.
- 1 cooled oil fuel atomizer with joint pressure pipe.
- 9 atomizer caps.
- 1 starting air valve complete.
- 1 cylinder escape valve complete.
- 1 piston complete with studs & rings.
- 1 set piston rings for one piston.
- 1 connecting rod top end bushing.
- 1 set (6) piston rings.)
- 1 suction valve complete.) for each stage of manoeuvring
- 1 delivery valve complete.) air compressor.
- 1 main stop valve spindle with seat.)
- 1 shut off valve spindle with seat.) for the starting air
- 1 drain valve spindle with seat.) receivers.
- 1 piston with liner and spring.)
- 1 overflow valve with liner and spring.)
- 1 suction valve.) for the oil fuel
- 1 delivery valve.) pressure pump.
- 1 non-return valve.
- 1 cam with bush and bolts.

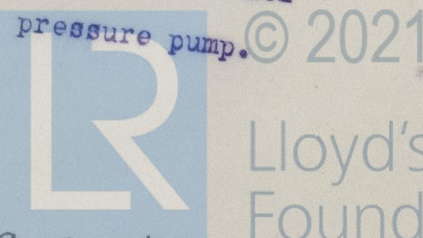

Lloyd's Register
Foundation

007324-007333-0116½

2.

- 1 set valves for the cooling water & bilge pumps.
- 1 set bolts & studs with nuts for one cylinder, including main bearing and crank pin bolts.
- 1 pipe connection of each type with cones.
- 1 fuel oil filter basket.
- 1 set of filter sieves for one lubricating oil filter.
- 1 set of bolts for one intermediate shaft coupling.
- 1 set of bolts for one crank shaft coupling.
- 1 set of gear wheels for the cam shaft drive.
- 1 set proportionate packings for crank case, cylinder cover, main valves, exhaust pipes, fuel oil pressure pump, cooling water and lubricating oil pumps and covers for starting air receivers, and packing material for all joints requiring special packing.



© 2021

Lloyd's Register
Foundation

007324-007333-0116#2

1 set of gears wheels for the cam shaft drive.
 1 set of bolts for one crank shaft coupling.
 1 set of bolts for one intermediate shaft coupling.
 1 set of bolts for one indicating oil filter.
 1 set of filter sleeves for one indicating oil filter.
 1 set of oil filter bracket.
 1 pipe connection of each type with cones.
 1 pipe bearing and crank pin roller.
 1 set bolts & studs with nuts for one cylinder, including
 1 set sleeves for the cooling water & pipe pumps.

they Bailey's make
the Horse Power
or Horse Power
ade for which re
ENGINESES
annum pressure in ci
on of bearings, adjust
olutions per minute
nt shaft, dia of

Revolutions per minute.

ank Shaft, dia. of

Wheel Shaft, dia

Shaft, diameter

prize Liners, thick

seller boss

he liner does not fit
so liners are fitted

Mr. If so
peller, dia 226

Method of reversal
red. Thick

Sucking water
ig Water Pu

Pumps work

st Pumps, A

No. and siz

ident Po

the Bridge
easily acc

red suffici

pas pass th

Pipes, Coc

ment to an

Air Compt

Small Auxiliary

Auxiliary Engine