

G.R. 130.

38284 SP
Class Contingent

(LLOYD'S REGISTER.)

VESSELS OF 100 TONS AND UPWARDS.

These particulars are supplied by the Registrar General of Shipping and Seamen for the sole use of Lloyd's Register of Shipping.
Signal Letters (if any) G.D.M.M.



Official Number.	Name of Ship.	No., Date, and Port of Registry.
167385	BEECHWOOD	7 in 1940, London.

No., Date, and Port of previous Registry (if any).				
Whether British or Foreign Built.	Whether a Sailing, Steam, or Motor Ship, if Steam or Motor Ship how propelled.	Where Built.	When Built.	Name and Address of Builders.
British	Steam Ship Single Screw	Sunderland	1940	Sir James Laing & Sons Ltd., Sunderland.

Number of Decks	One and Shelter Deck	Length from fore part of stem, to the aft side of the head of the stern post	Feet.	Tenths.
Number of Masts	Two		415	1
Rigged	Not	Main breadth to outside of plank	58	2.5
Stem	Straight	Depth in hold from tonnage deck to ceiling amidships	24	8.5
Stern	Cruiser	Depth in hold from upper deck to ceiling amidships, in the case of three decks and upwards	-	-
Build	Clencher	Depth from top of deck at side amidships to bottom of keel	28	0.5
Framework and description of vessel	Steel Cargo	Round of beam	-	5
Number of Bulkheads	Watertight Seven	Length of engine room, if any	47	5

Particulars of propelling Engines, etc. (if any), and Water Ballast Tanks, as supplied by Builders, Owners, or Engine Makers.

No. of sets of Engines.	Description of Engines.	Whether British or Foreign Made.	When made.	Name and address of makers.	Reciprocating Engines.		Rotary Engines.	N.H.P. B.H.P. I.H.P. Estimated Speed of Ship.
					No. and Diameter of Cylinders in each set.	Length of Stroke.		
One	Triple Expansion Direct Acting Vertical	British	1940	The North Eastern Marine Engineering Co. (1938) Ltd.,	Three	23"	42"	365
One	Particulars of Boilers: Cylindrical Multitubular Two Main One Auxiliary Iron or Steel Steel Loaded Pressure 220 lbs. per sq. in.	British	1940	Wallsend-on-Tyne.		38"	65"	1450
							10 1/2 Knots	

Number of water ballast tanks, and their capacity in tons:— Nine = 1665 Tons.

PARTICULARS OF TONNAGE.


GROSS TONNAGE.		No. of Tons.	DEDUCTIONS ALLOWED.		No. of Tons.
Under Tonnage Deck		4355.28	On account of space required for propelling power		1567.02
Space or spaces between Decks			On account of spaces occupied by Seamen or Apprentices, and appropriated to their use, and kept free from Goods or Stores of every kind, not being the personal property of the Crew		309.58
Turret or Trunk			These spaces are the following, viz. :—		
Forecastle	(Lower - Houses in Shelter)	55.26	In Shelter Tween Deck, Poop and Roundhouses.		
Bridge space	(Upper - Houses in Shelter)	12.74	(Number of Seamen or Apprentices for whom accommodation is certified 41)		
Poop or Break	Tween Decks	42.95	Deductions under Section 79 of the Merchant Shipping Act, 1894, and Section 54 of the Merchant Shipping Act, 1906, as follows :—		
Side Houses		131.76	Cubic Metres.		
Deck Houses		261.68	Masters Accom. 21.18		
Chart House			Chart Space 7.04		
Spaces for Machinery, and light, and air, under Section 78 (2) of the Merchant Shipping Act, 1894		37.26	Wireless Telegraphy Space 4.55		263.08
Excess of Hatchways			Boatswains Store-room 48.97		
Gross Tonnage		4896.93	Water Ballast Spaces 181.34		2139.68
Deductions, as per contra		2139.68			
Register Tonnage		2757.25			

NOTE 1.—The tonnage of the engine room spaces below the Upper Deck is 602.53 tons, and the tonnage of the total spaces framed in above the Upper Deck for propelling machinery and for light and air is 130.63 tons.

NOTE 2.—The undermentioned spaces above the Upper Deck are not included in the cubical contents forming the ship's register tonnage.

Shelter Tween Decks (Part I Length 338.5 Ft. = 1617.19 Tons.)	(Part II " 5.0 " = 18.86 "
Open Forecastle	" 36.8 " = 52.95 "

Name of Master	Certificate of	Service No.	Competency No.
No. of Owners			
Name, Residence, and Description of Managing Owner if there are more owners than one.			
John I. Jacobs & Co. Ltd., 15, St. Helens Place, London, E.C.3.		Manager: Joseph Henry Jacobs of same address.	
Shares:— Sixtyfour.			
Dated 10th January, 1940.			

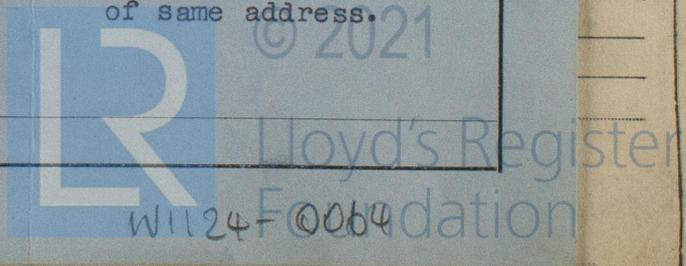

Handwritten notes on the left margin: '36.25 ft.', '155', '145', '390', '169', '15.16.19', 'p. 4.6.12', 'ou. 1.6.7', '98'

Handwritten notes on the right margin: '40', '40', '7.5', 'in the', 'tube', 'q. feet', 'liary', 'Bilges', 'from one', 'W1124-0066'