

# REPORT ON ELECTRIC FITTINGS.

(OTHER THAN FOR THE PROPULSION OF THE VESSEL)

Received at London Office **NEWCASTLE-ON-TYNE** 8 SEP 1927

Date of writing Report 19 1927 When handed in at Local Office 7/9/27 Port of NEWCASTLE-ON-TYNE

No. in Survey held at Newcastle Date, First Survey 18 Aug Last Survey 22 Aug 19 27  
Reg. Book. Supp (Number of Visits 2)

41766 on the Monagao Tons { Gross  
Not

Built at Newcastle By whom built Palmer & Co Ltd. Yard No. 974 When built 1927

Owners Venezuelan Gulf Oil Co. Port belonging to

Electric Light Installation fitted by Palmer & Co Ltd. Contract No. 974 When fitted 1927.

System of Distribution Double wire ✓

Pressure of supply for Lighting 110 volts, Heating — volts, Power — volts.

Direct or Alternating Current, Lighting Direct ✓ Power —

If alternating current system, state frequency of periods per second —

Has the Automatic Governor been tested and found efficient when the whole load is suddenly thrown on or off Yes

Generators, do they comply with the requirements regarding overload Yes, are they compound wound Yes

are they over compounded 5 per cent. Yes, if not compound wound state distance between each generator —

Where more than one generator is fitted are they arranged to run in parallel —, is an adjustable regulating resistance fitted in series with each shunt field Yes

Are all terminals accessible and clearly marked Yes, are they so spaced or shielded that they cannot be accidentally earthed, or short circuited Yes

Are the lubricating arrangements of the generators as per Rule Yes

Position of Generators Engine room

is the ventilation in way of the generators satisfactory Yes, are they clear of all inflammable material Yes

if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the generators — and —, are the generators protected from mechanical injury and damage from water, steam or oil Yes

are their axis of rotation fore and aft Yes

Earthing, are the bedplates and frames of the generating plant efficiently earthed Yes are the prime movers and their respective generators in metallic contact Yes

Main Switch Boards, where placed Engine room

If the generators and main switchboard are not placed in the same compartment, is each generator provided with a fuse on each insulated pole as near as possible to the terminals of the generator, additional to that provided on the main switchboard —

Switchboards, are they placed in accessible positions, free from inflammable gases and acid fumes Yes

are they protected from mechanical injury and damage from water, steam or oil Yes, if situated near unprotected woodwork or other combustible material, state distance of same horizontally from or vertically above the switchboards — and —

are they constructed wholly of durable, incombustible non-absorbent materials Yes, is all insulation of high dielectric strength and of permanently high insulation resistance Yes

if semi-insulating material is used, are all conducting parts connected to one pole insulated from the slab with mica or micanite and the slab similarly insulated from its framework Yes, and is the frame effectively earthed Yes

Are the following fittings as per Rule, viz.:— spacing or shielding of live parts Yes, accessibility of all parts Yes, absence of fuses on back of board Yes, proportion of omnibus bars Yes

individual fuses to voltmeter, pilot or earth lamp Yes, connections of switches Yes


Main Switchgear, description of switchgear for each generator and each outgoing circuit, and arrangement of equalizer switches Double pole switch & double pole fuses on dynamo mains & on each outgoing circuit

Instruments on main switchboard 1 ammeters 1 voltmeters — synchronising device for paralleling purposes.

Earth Testing, state what means are provided at the main switchboard for indicating the state of the insulation of the system earth lamps coupled to earth through switches & fuses.

Switches, Circuit Breakers and Fusible Cut-outs, do these comply with the requirements of the Rules Yes

Section and Distribution Boards, is the construction, protection, insulation, material, and position of these as per rule Yes.

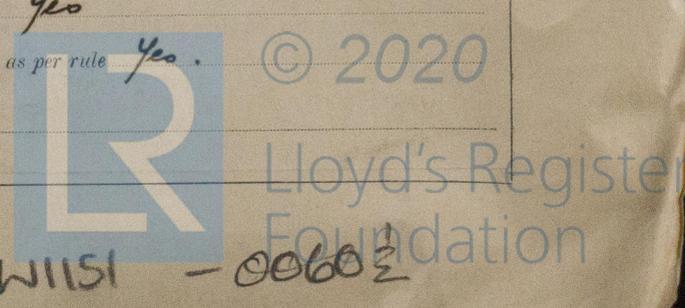

**Insulation of Cables**, state type of cables, single or twin *single* are the cables insulated and protected as per Tables III or IV of the Rules *yes*

**Fall of Pressure**, state maximum between bus bars and any point of the installation under maximum load *5 volts*

**Cable Sockets and other connections**, are the ends of all cables having a sectional area of 0.007 square inch and above provided with soldering sockets *yes*

**Paper Insulated Cables**, If cables are paper covered, is the dielectric at the exposed ends of the conductor protected from moisture by being suitably sealed with insulating compound *yes*

**Cable Runs**, are the cables fixed as far as possible in accessible positions not exposed to drip or accumulation of water or oil, or to high temperature from boilers, steam pipes, uptakes or other hot objects, or to avoidable risk of mechanical damage *yes*

**Support and Protection of Cables**, state how the cables are supported and protected *lead covered & braided cables supported by iron clips. Main cables carried in pipes along expansion trunk*

If cables are run in wood casings, are the casings and caps secured by screws *yes*, are the cap screws of brass *yes*, are the cables run in separate grooves *yes*. If armoured and lead covered cables are secured by metal clips, are the clips spaced as per Table VI *yes*

**Refrigerated Chambers**, if lights are fitted, are the cables and fittings in accordance with the special requirements *yes*

**Joints in Cables**, state if any, and how made, insulated, and protected *none made*

**Watertight Glands and Deck Tubes**, are all cables passing through decks and watertight bulkheads provided with deck tubes or watertight glands *yes*

**Bushes in Beams and Non-watertight Positions**, where unarmoured cables pass through beams and non-watertight partitions, are the holes efficiently bushed *yes* state the material of which the bushes are made *lead*

**Earthing Connections**, state what earthing connections are fitted and their respective sectional areas *are their connections made as per Rule*

**Alternative Lighting**, are the groups of lights in the propelling machinery space arranged as per Rule *yes*

**Emergency Supply**, state position and method of control of the emergency supply and how the generator is driven *none fitted*

**Navigation Lamps**, are these separately wired *yes*, controlled by separate switch and separate fuses *yes*

are the fuses double pole *yes*, are the switches and fuses grouped in a position accessible only to the officers on watch *yes*

has each navigation lamp an automatic indicator as per Rule *yes*, are separate screens provided for the use of oil and electric side lights *yes*

are separate oil lanterns provided for the mast head lights and side lights *yes*

**Fittings**, are all fittings on weather decks, in stakeholds and engine rooms and wherever exposed to drip or condensed moisture, watertight *yes*

are any fittings placed in spaces in which goods are liable to be stacked in close proximity to them; if so, how are they protected *yes in pump room*

are any fittings placed in spaces where inflammable or explosive dust or gases are liable to be present, if so, how are they protected *yes in pump room*

*gaslight fittings having well glasses & metal guards* how are the cables led *outside pump room entrance*

**Searchlight Lamps**, No. of *one*, whether fixed or portable *fixed*, are their fittings as per Rule *yes*

**Arc Lamps**, other than searchlight lamps, No. of *one*, are their live parts insulated from the frame or case *yes*, are their fittings as per Rule *yes*

**Motors**, are their working parts readily accessible *yes*, are the coils self-contained and readily removable for replacement *yes*

are the brushes, brush holders, terminals and lubricating arrangements as per Rule *yes*, are the motors placed in well-ventilated compartments in which inflammable gases cannot accumulate and clear of all inflammable material *yes*

are they protected from mechanical injury and damage from water, steam or oil *yes*, are their axis of rotation face and aft *yes*

if situated near unprotected woodwork or other combustible material, are the motors of the totally enclosed, pipe ventilated, forced draught, drip or flame proof type *yes*

if not of this type, state distance of the combustible material horizontally or vertically above the motors *yes* and *yes*

**Control Gear and Resistances**, are the generator field and motor speed regulators, starters and controllers constructed as per Rule *yes*

**Lightning Conductors**, where lightning conductors are required, are these fitted as per Rule *yes*

**Ships carrying Oil having a Flash Point less than 150° F.** Have the special requirements of the Rules been complied with regarding switches, joint boxes, section and distribution boards, protection of cables, method of distribution, lead of cables, lights and fittings *yes*

If portable lamps for use in dangerous spaces are supplied, are they of a type approved by the Home Office *yes*

DESCRIPTION OF GENERATOR	No. of	RATED AT				DRIVEN BY	WHERE DRIVEN BY AN INTERNAL COMBUSTION ENGINE	
		Kilowatts	Volts	Ampères	Revs. per Min.		Fuel Used	Flash Point of Fuel
MAIN	1	12	110	109	360	single cylinder		
AUXILIARY						steam engine		
EMERGENCY								
ROTARY TRANSFORMER								

Ref. No.	DESCRIPTION	No. of Conductors	Effective Area of each Conductor Sq. Ins.	COMPOSITION OF STRAND		Total Maximum Current Ampères	Approximate Length (Lead and Return) Feet	Insulated with	HOW PROTECTED
				No.	Diameter				
	MAIN GENERATOR	2	.1168	37	.064	109	73	V. I. R.	Lead cov. arm braided
	AUXILIARY GENERATOR								
	EMERGENCY GENERATOR								
	ROTARY TRANSFORMER								
	AUXILIARY SWITCHBOARDS								
	ENGINE ROOM								
	BOILER ROOM	2	.00458	7	.029	9.29	132	50	Lead cov. braided
	Aft acc <sup>n</sup>	2	.01462	7	.052	32.96	96	50	50
	Mid acc <sup>n</sup> & searchlt	2	.06	19	.064	23.3	490	50	50
	Navigation	2	.00701	7	.036	6.0	520	50	50
	WIRELESS	2	.01462	7	.052	13.5	520	50	50
	SEARCHLIGHT	2	.00299	3	.036	5.0	90	50	50
	MASTHEAD LIGHT	2	.00299	3	.036	.9	300	50	50
	SIDE LIGHTS	2	.00194	3	.029	.9	114	50	50
	COMPASS LIGHTS	2	.00194	3	.029	.25	86	50	50
	STERN LIGHTS	2	.00299	3	.036	.9	555	50	50
	CARGO LIGHTS	2	.003	40	.0076	3.0	80	50	Specialty arm'd & braided
	ARC LAMPS								
	HEATERS								

Ref. No.	DESCRIPTION	No. of Motors	Effective Area of each Conductor Sq. Ins.	COMPOSITION OF STRAND		Total Maximum Current Ampères	Approximate Length (Lead and Return) Feet	Insulated with	HOW PROTECTED
				No.	Diameter				
	BALLAST PUMP								
	MAIN BILGE LINE PUMPS								
	GENERAL SERVICE PUMP								
	EMERGENCY BILGE PUMP								
	SANITARY PUMP								
	CIRC. SEA WATER PUMPS								
	CIRC. FRESH WATER PUMPS								
	AIR COMPRESSOR								
	FRESH WATER PUMP								
	ENGINE TURNING GEAR								
	ENGINE REVERSING GEAR								
	LUBRICATING OIL PUMPS								
	OIL FUEL TRANSFER PUMP								
	WINDLASS								
	WINCHES, FORWARD								
	WINCHES, AFT								
	STEERING GEAR								
	WORKSHOP MOTOR								
	VENTILATING FANS								

All Conductors are of annealed copper conforming to British Standard Specification No. 7.  
 The Insulated Conductors are guaranteed to withstand the immersion and resistance tests specified in the Rules.  
 The foregoing is a correct description.

*W. R. Palmer*

Electrical Engineers.

Date *3/9/27*

*Palmer S + J Co.*

COMPASSES.

Distance between electric generators or motors and standard compass *120 feet*  
 Distance between electric generators or motors and steering compass *110 feet.*  
 The nearest cables to the compasses are as follows:—  
 A cable carrying *.25* Ampères *on the* feet from standard compass *8* feet from steering compass.  
 A cable carrying *.25* Ampères *8* feet from standard compass *on the* feet from steering compass.  
 A cable carrying Ampères feet from standard compass feet from steering compass.  
 Have the compasses been adjusted with and without the electric installation at work at full power *yes*  
 Has the effect of switching on and off circuits, motors and other electro-magnetic apparatus within the vicinity of the compasses been noted *yes*  
 The maximum deviation due to electric currents was found to be *nil* degrees on *all* course in the case of the standard compass, and *nil* degrees on *all* course in the case of the steering compass.

PALMERS SHIPBUILDING & IRON Co., Ltd.,

*W. R. Macdonald* Builder's Signature. Date *3/9/27.*

SHIPYARD MANAGER.

Is this installation a duplicate of a previous case *yes* If so, state name of vessel *Madaneta.*

General Remarks (State quality of workmanship, opinions as to class, &c.)

*The above installation is in accordance with the Societies Rules. The vessel is eligible in my opinion forotation elec light wireless*

*It is submitted that this vessel is eligible for THE RECORD. Elec. Light.*

*W. T. Badger*

Total Capacity of Generators *12* Kilowatts

The amount of Fee ... £ *12* : - : When applied for, *2/9/1927*

Travelling Expenses (if any) £ : : When received, *14.9.27*

*W. T. Badger*  
 Surveyor to Lloyd's Register of Shipping.

Committee's Minute

Assigned *Elec Light*

Im. 24. — Transfer. (The Surveyors are requested not to write on or below the space for Committee's Minute.)



© 2020

Lloyd's Register Foundation