

smallest distance between boilers or uptakes and bunkers or woodwork

Is oil fuel carried in the

manufactured

52

WESTMINSTER

GLASGOW REPORT No 61123

(Received at London Office

19

2863

Port

GLASGOW

Date

17th Oct

1938

WE

request that the

MARINE

Boilers numbered as below to be made

LOBNITZ & CO LTD

by

BARCLAY CURLE & CO LTD

be Specially Surveyed while building.

WE hereby engage to pay Special Survey Fees as follows, viz:—

For boilers up to 250 Nominal Horse Power, two shillings per Horse Power. For boilers over 250 Nominal Horse Power, two shillings per Horse Power for the first 250 Horse Power and one shilling per Horse Power above 250. The Nominal Horse Power to be reckoned at 15 square feet of heating surface. No fee to be less than £4 4s.

MEM.—In exceptional cases an additional charge will be made according to the services performed, and in all cases where travelling expenses are incurred by the Surveyors in connexion with the above services, they are to be defrayed by the parties interested.

er No.

38/11

This request is made upon the terms of the Rules and Regulations of Lloyd's Register of Shipping, which provide that:—


"While the Committees of the Society use their best endeavours to ensure that the functions of the Society are properly executed, to be understood that neither the Society nor any Member of any of its Committees is under any circumstances whatever to be responsible for any inaccuracy in any report or certificate issued by the Society or its Surveyors, or in any entry in the Register or other publication of the Society, or for any error of judgment, default or negligence of any of its Committees or any Member of, or the Surveyors, or other Officers or Agents of the Society."

Signature

the Secretary,

Lloyd's Register of Shipping,


71, Fenchurch Street, London, E.C.3.

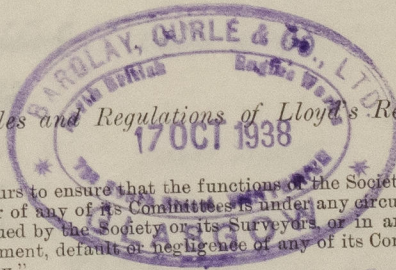

FOR BARCLAY, CURLE & CO., LTD.

Alwards Maclellan

Chief Draughtsman



Lloyd's Register
Foundation

007553-007562-0327

Thickness

Lower back plate: Material

Tensile strength