

Length uncovered

Correction

Position and Size.		ON FCS'L E, 8'-0" x 10'-0"		ON POOP 10'-10" x 16'-0"		All for Deck Functions		- 1023 -	
Item.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	
COAMING. Height above top of DECK	24" ✓		24" ✓		M. S. "MAULY."				
Thickness { Sides..... Ends.....	'40 ✓ '40 ✓		'40 ✓ '40 ✓						
SHIFTING BEAMS OR WEB PLATES.	Number Section and Scantlings Material		ONE. ✓ 10x367 7/F 3x3x'40		ONE. ✓ 14x38 7/F 4x3x'40		TRIESTE REPT. 116 no 6638		
* FORE AND AFTERS.	Number Section and Scantlings Material		✓						
HATCHES Thickness	3" ✓		3" ✓						
Remarks.....									

* When the Fore and Afters are of wood the depth should be stated from the underside of the hatches.

007722-007730 - 0302 1/2

CORRECTION necessary because the measurement
in accordance with the Statute is not taken at the

174 ✓

Forecastle

134-65✓

134-65

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.—STEAM SHIPS.

Index No. 31723
(For London Office only)

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Ship's Name.	Port of Registry and Nationality.	Official Number.	Gross Tonnage.	Date of Build.	Particulars of Classification.
S. S. MAULY.	Griest Italian	-	5942.67	Budding	8100 A. I. Contemplated
Number in Register Book					
Registered dimensions from Ship's Register.	LENGTH. 407.5	BREADTH. 53.93	DEPTH. 27.05	UNDER DECK TONNAGE. 4958.05	
Length on LOADLINE.	Frame Depth 10 Rule „ 6 X	Ceiling fitted Sheer 6.2	Peak 3' Dnel Tanks 7' 2" panes 1.25 intervens		
CORRECTED DIMENSIONS.	389.42 Ext. Breadth 53.96	12. 15.64	Bottom under 29.48	4958.05 4956.8	
Co-efficient of fineness.....	·793 -				
Any modification necessary [Para. 4 (a) to (e)]*	6 all DB. -				
Co-efficient as corrected	·773.				

Sheer { Stem.. 10.8 at Sternpost 50.5	$\{ 158.5 \div 2 = 79.25$ Mean
Sheer at $\frac{1}{2}$ of the length from { Stem 56.5 Sternpost 22	$\{ 78.5 \div 2 = 39.25$ Mean 55. 71.436
Gradual mean Sheer	71.436
Standard mean Sheer [Table, Para. 18]	42.048.94
Difference.....	22.42
§ If limited as Para. 18 (f)	$\div 4 = 5.6$ ✓ - 5½" ✓
Rise in Sheer { At front of bridge house from amidships [Para. 18 (e)] { At after end of forecastle	
¶ Fall in Sheer { Para. 18 (d) {	$\div 2 =$
Length uncovered	Correction

ALLOWANCE FOR DECK ERECTIONS :

Freeboard, Table C.....

Correction for Length, if required (Para. 12, 13, and 14)

Freeboard by Table A. corrected for sheer, and for length, if required (Para. 12, 13, and 14) { and for length.

Difference

Percentage as below.....

Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11) {

Allowance for Deck Erections

Length.....

Forecastle.....

Bridge House

† Raised Qr. Dk.....

Poop.....

Total

Length of Ship

Corresponding percentage {

(Para. 11, 12, 13, or 14) {

35.2%.

Length allowed.....

38.0

134.65

37.00

209.65

389.42

- 53.8%

83

Height.....

38.0

134.65

37.00

209.65

389.42

- 53.8%

83

11.48

10.81

- 11½"

2 - 8 3/4

.06

35.2%

Winter Freeboard

Summer Freeboard

Indian Summer Freeboard

N. A. Winter Freeboard

Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or steel deck with side.

Winter Freeboard from deck line

Summer " " " "

Indian Summer " " " "

N. A. Winter " " " "

State dimensions of freeing port area on back of this form.

The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight

line of keel or to the water line. If measured relatively to water line the vessel's draft at time of

survey, and also the usual load draft forward and aft should be

MARKING FORM

RECEIVED

AUG 1925

FRESH WATER LINE above centre of Disc ..
 INDIAN SUMMER LINE " " " ..
 WINTER LINE below " " ..
 WINTER NORTH ATLANTIC LINE " " ..

If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside
 In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abeam amid-
 ships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.
 In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and stern-
 post. In vessels having poops and forecastles it means the sheer measured at points distant
 one-eighth of the vessel's length from stem and stern-post.

6 - 11 1/2 10 1/2"
 6 - 5 3/4 4 3/4"
 6 - 8" 5' 11"

7 - 1 1/2 0 1/4"
 6 - 7 1/2 6 1/2"
 6 - 5 3/4 6 - 0 3/4"

6 - 7 1/2 6 1/2"
 6 1/2 "
 5 1/2 6 "
 6 5 1/2 "

6 - 6 1/2 " 6 1/2 "
 6 1/2 "
 5 1/2 6 "
 6 5 1/2 "

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

2020

Do all the Frames extend to the top height in the Poop? Yes ✓ Raised Quarter Deck? ✓ Bridge House? All frames ✓ Forecastle? Yes
 To what height do the Reverse Frames extend? front edge to 20' and at all frames.
 Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? Yes ✓
 Give particulars of the means for closing the openings in Bulkhead closed ✓
 Is the Poop or Raised Quarter Deck connected with the Bridge House? No ✓ Has the Bridge House an efficient Bulkhead at the fore end? Yes ✓
 Give particulars of the means for closing the openings in Bulkhead closed ✓
 What is the thickness of the Bridge Front plating? '36 ✓ and Coaming plate? '40 ✓
 Give scantlings and spacing of the Stiffeners 7 9 x 3 1/2 x .55 O.A. at 30° ✓
 Are bracket plates fitted at each end of the Stiffeners? Sugs. ✓ Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks? Yes ✓
 Has the Bridge House an efficient Iron Bulkhead at the after end? Yes ✓
 How are the openings closed? 3 hinged steel W.T. doors. ✓
 Is the Forecastle at least as high as the main or top-gallant rail? Yes ✓ Has the Forecastle an efficient Iron or Wood Bulk'd. at after end? Yes ✓
 Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? Covered by bridge ✓
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed? ✓
 Give thickness of plating; scantlings and spacing of Stiffeners ✓
 What is the height of the exposed Casings? ✓ Are suitable means provided for closing all openings in them in bad weather? Yes ✓
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— Yes ✓

Position and Size.	No 1 22' 0" x 20' 0"	No 2 30' 0" x 20' 0"	No 3 25' 0" x 20' 0" ON BRIDGE DECK	No 4 17' 6" x 20' 0" ON BRIDGE DECK	No 5 27' 6" x 20' 0"
Item.	Ship. No 6 25' 0" x 20' 0"	Rule.	Ship.	Rule.	Ship.
COAMING Thickness Sides.....	42 ✓		42 ✓	36 ✓	36 ✓
Thickness Ends.....	.44 ✓		.44 ✓	.44 ✓	.44 ✓
SHUFTING BEAMS OR WEB PLATES.	4 ✓	5 ✓	4 ✓	3 ✓	5 ✓
Number Section and Scantlings Material.....			7 1/2 18 x .36		
* FORE AND AFTERS.	Number Section and Scantlings Material.....				
HATCHES Thickness.....	3" ✓	3" ✓	3" ✓	3" ✓	3" ✓
Remarks.....					

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

No arrangements to fit portion of an
The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.



What is the thickness of the Bridge Sheerstrake? Strake between Main and Bridge Sheerstrakes?

Delete the words { The Crew are, are not, berthed in the bridge house.
that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, are not satisfactory.

Length of Bulwarks in well

Area of Freeing Ports required by Para. 11 (e) each side of vessel = Sq. ft.

Ft. Tenth.	Ft. Tenth.	No.	Freeing Ports (each side of vessel)	=	Sq. ft.
x	x				
x	x				
			Total deficiency or excess	=	Sq. ft.

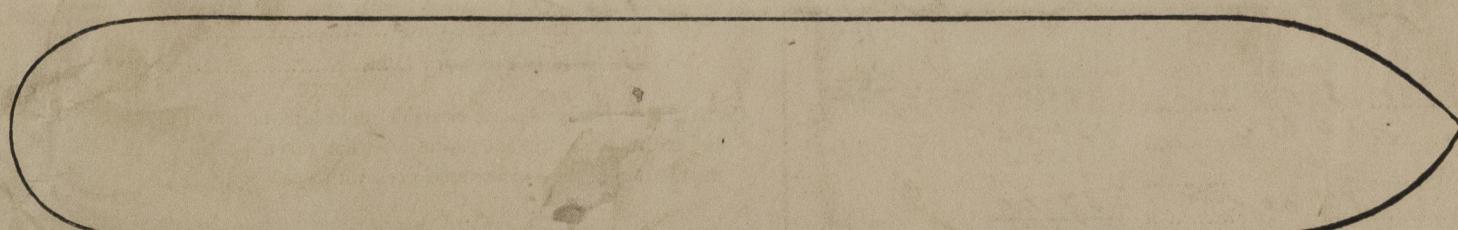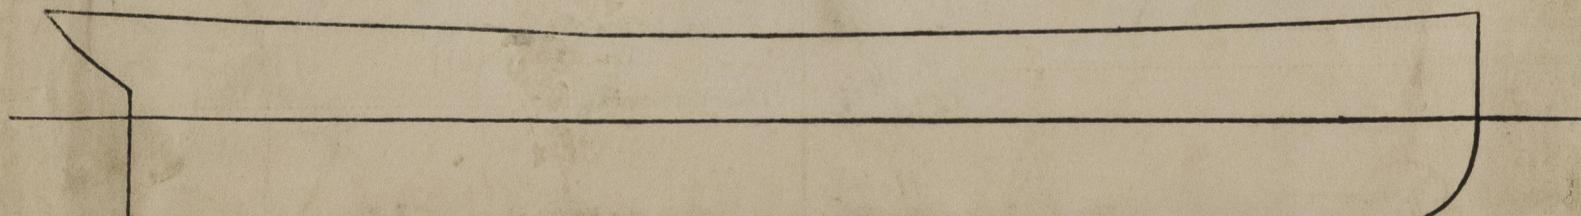

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel

Builder's name and yard number Lautine Novare Triestino No 137. (Tunis own)

Names of sister vessels S.S. "GILIA" C.N.T. No 138 (Sister ship).

Owners Lautine Novare Triestino

" Address

Fee £ 1350.—

Received by me

See S.C. Rpt.

© 2020



Lloyd's Register
Foundation