

TELEPHONE: SEYMOUR 2022

TELEGRAPHIC ADDRESS:
"REGISTER" VANCOUVER
CODE: A B C 5TH EDITION**Lloyd's Register of Shipping**LLOYD'S REGISTER
LONDON, BRITISH COLUMBIA

REQD 27 OCT 1919 802-3 YORKSHIRE BUILDING

ANSD VANCOUVER, B. C., October 6th, 1919.

The Secretary,
Lloyd's Register of Shipping,
71 Fenchurch Street,
London, E. C.

Initial "S"

Dear Sir:-

We are in receipt of your letter of
the 16th. ultimo, in connection with Report No. 751
"CANADIAN TROOPER"

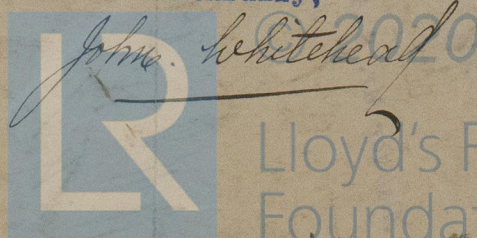
In reply we wish to state that the
centre girder bottom angles are .625 in vessel and not
.525 as stated in report, and semi box beams of 3 x 3 x
.40 angle to bulkhead 24" x .38 plate, and 6 x 3½ x .40
bulb beam bracketed to stringer plate on port and starboard
sides fitted on fore side of collision bulkhead in way
of second panting stringer, the collision bulkhead plating
including floor plate is fitted as per approved plan, and
as herein stated .40 floor plate, bulkhead plating .34, .32,
.30, .28, and .26 at main deck.

Trusting same will be in order.

I am, Dear Sir,

Yours faithfully,

JW/JH

Lloyd's Register
Foundation

W1245-0083

Referred to the Chief Ship Surveyor.

JRM.

OCT 27 9.5

Also for Mr. S. A. Hill to note.

19
11.11.19



© 2020

Lloyd's Register
Foundation

NAME

marks of the

"The endorsement to bring out a presented in th

verse N

ing: Tab

itudinal

ridge De

This v
s and the
lassed

the Rest
buckhead
date of 1

This Certifi
"While the
understood that n
in any report or c
Society, for an