

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.—STEAM SHIPS.

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Port of Survey Leith
Date of Survey During Construction
Name of Surveyor Robt. Sheetham

Ship's Name
WILLIAM MESSINA

Port of Registry and Nationality.
London
U.K.

Official Number.
148573
Not yet assigned.

Gross Tonnage.
App.
130.

Date of Build.
1925.

Particulars of Classification.
+100A1. For towing purposes.
(Contemplated.)

Registered dimensions from Ship's Register.	LENGTH. <u>90-20</u>	BREADTH. <u>20-00</u>	DEPTH. <u>9-90</u>	UNDER DECK TONNAGE. <u>117-96</u>
Length on LOADLINE.	<u>89-50</u>	Frame Depth Rule <u>4-3-1</u> <u>2x1 = -0.16</u> <u>No sheering</u> <u>+0.33</u>	Ceiling <u>None</u> except in bunkers Sheer <u>+1.21</u> Ceiling <u>+0.16</u>	Peak Tanks } incl. Deeper floor + 4 Tons.
CORRECTED DIMENSIONS.	<u>89-50</u>	<u>20-17</u>	<u>11-27</u>	<u>121-96</u>

Moulded Depth as measured 11-0
 Rule Wood dk. 3 1/2" x 28 Sts. = 3-28 inches
 Teak Sheathing 2 1/2" x 28 Sts. = 2-48504
 Addition for Keel below base line .22
 for draught record..... 1 inches
 Diff. 2 1/2"
10-11 3/4 used.

NOTE.—If the depth is measured when vessel is afloat, the details of measurement should be reported.

Co-efficient of fineness..... .60
 Any modification necessary [Para. 4 (a) to (e)]*
 Co-efficient as corrected68 lowest in Tables.

CORRECTION FOR LENGTH.

Length of Ship on Loadline.....	<u>89-50</u>
Length in Table	<u>131-5075</u>
Difference	<u>42-0025</u>
Correction for 10ft., Table A.	<u>.9</u>
× Difference divided by 10	<u>3.78</u>
If 1/10ths length covered divide by 2	<u>-3 3/4</u>

Table C. (if required.) ✓

Sheer { Stem..... 49 } 81 ÷ 2 = 40.5 Mean 36 1/2 43.63
 at { Sternpost ... 32 } 1.21

Sheer at 1/2 of the length from { Stem 29 }
 Sternpost 19 } 48 ÷ 2 = 24 Mean
 Gradual mean Sheer S = 40.5 effective 42.06 ÷ .55 = 43.63
 Standard mean Sheer [Table, Para. 18] 18.95 Correction
 Difference..... 23.11 ÷ 4 =
 If limited as Para. 18 (f) 1/2 Stand. mean allowed 9.47 ÷ 4 = 2.36
Sheers are relative to rule line of flat keel. -2 1/4

CORRECTION FOR IRON DECK.
 Proportion covered, if less than 1/10ths length covered
 Thickness of usual wood deck, less stringer

CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships.....	<u>20-0</u>
Round of Beam	<u>5</u>
Normal round.....	<u>5</u>
Difference	✓
Proportion of Deck uncovered (Para. 19)	<u>No erections.</u>

NOTE.—The round of beam should be reported on the full breadth of vessel at the gunwale.

Rise in Sheer { At front of bridge house.....
 from amidships [Para. 18 (e)] { At after end of forecastle

Fall in Sheer {
 Para. 18 (d) } ✓ ÷ 2 = None.
 Length uncovered No erections. Correction ✓

Freeboard, Table A	<u>4-9 inches.</u> <u>See 1-6</u>
Correction for Sheer	<u>2 1/4</u>
Correction for Length	<u>1-3 3/4</u>
Allowance for Deck Erections	<u>3 3/4</u>
Correction for Round of Beam.....	<u>1-0</u>
Correction for fall in Sheer (if any).....	✓
Correction for Iron Deck (if required)	✓
2 1/2" Teak Sheathing on Steel Dk. See above.	✓
Additions for non-compliance with provisions of Para. 11 (d) and (e) †	✓
Other Corrections (if any) <u>Trim by Stern + 2</u>	<u>1-2</u>
Winter Freeboard	<u>1-2</u>
Summer Freeboard	<u>1-1</u>
Indian Summer Freeboard	✓
N. A. Winter Freeboard	✓

ALLOWANCE FOR DECK ERECTIONS:—

Freeboard, Table C.....	✓
Correction for Length, if required (Para. 12, 13, and 14)	✓
Freeboard by Table A, corrected for sheer, and for length, if required (Para. 12, 13, and 14)	✓
Difference	✓
Percentage as below.....	✓
Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11)	✓
Allowance for Deck Erections	✓

	Length.	Length allowed.	Height.
Forecastle.....			
Bridge House			
† Raised Qr. Dk.....			
Poop.....			
Total			
Length of Ship			
Corresponding percentage (Para. 11, 12, 13, or 14)			

Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or iron deck with side. 1

Winter Freeboard from deck line	<u>1-3</u>
Summer " " " "	<u>1-2</u>
Indian Summer " " " "	✓
N. A. Winter " " " "	✓

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck:—

Fresh Water Line above centre of Disc	✓
Indian Summer Line " " " "	✓
Winter Line below " " " "	✓
Winter North Atlantic Line " " " "	✓

25 FEB 1925

© If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible.
 † In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.
 § In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and sternpost. In vessels having poops and forecastles, it means the sheer measured at points distant one-eighth of the vessel's length from stem and sternpost.

Do all the Frames extend to the top height in the Poop? Raised Quarter Deck? Bridge House? Forecastle?

To what height do the Reverse Frames extend? *Single Ang. frames.*

Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end?

Give particulars of the means for closing the openings in Bulkhead

Is the Poop or Raised Quarter Deck connected with the Bridge House? Has the Bridge House an efficient Bulkhead at the fore end?

Give particulars of the means for closing the openings in Bulkhead

What is the thickness of the Bridge Front plating? and Coaming plate?

Give scantlings and spacing of the Stiffeners

Are bracket plates fitted at each end of the Stiffeners? Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks?

Has the Bridge House an efficient Iron Bulkhead at the after end?

How are the openings closed?

Is the Forecastle at least as high as the main or top-gallant rail? Has the Forecastle an efficient Iron or Wood Bulk'd. at after end?

Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? *No.*

If the openings are not so protected are the exposed parts of the Casings efficiently constructed? *Yes.*

Give thickness of plating; scantlings and spacing of Stiffeners *Plating .30 - Stiffeners 3 x 2 1/2 x .25 - Spacing 27 1/2" esp. -*

What is the height of the exposed Casings? *3'-0" E&B* Are suitable means provided for closing all openings in them in bad weather? *Yes.*

Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— *None.*

Position and Size.		Ship.		Rule.		Ship.		Rule.		Ship.		Rule.	
Item.		Ship.	Rule.										
COAMING.	Height above top of DECK												
	Thickness { Sides..... Ends.....												
SHIFTING BEAMS OR WEB PLATES.	Number												
	Section and Scantlings												
	Material												
* FORE AND AFTERS.	Number												
	Section and Scantlings												
	Material												
HATCHES	Thickness												
Remarks.....													

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.

(If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.

What is the thickness of the Bridge Sheerstrake? Strake between Main and Bridge Sheerstrakes?


Delete the words *The Crew are, ~~berthed~~ in the bridge house. forward, and officers aft.*
 that do not apply *The arrangements to enable them to get backwards and forwards from their quarters are, ~~unsatisfactory~~ satisfactory.*

Length of Bulwarks ~~in feet~~ *Low bulwarks 22" in height from top of wood deck sheathing to top of Teak rail. Fore*

Area of Freeing Ports required by Para. 11 (e) each side of vessel = Sq. ft.

Ft.	Tenths.	Ft.	Tenths.	No.	} 3 Freeing Ports (each side of vessel)	= 7.5	Sq. ft.
2.5	x	1.0	x	3			

Total deficiency or excess = *?* Sq. ft.

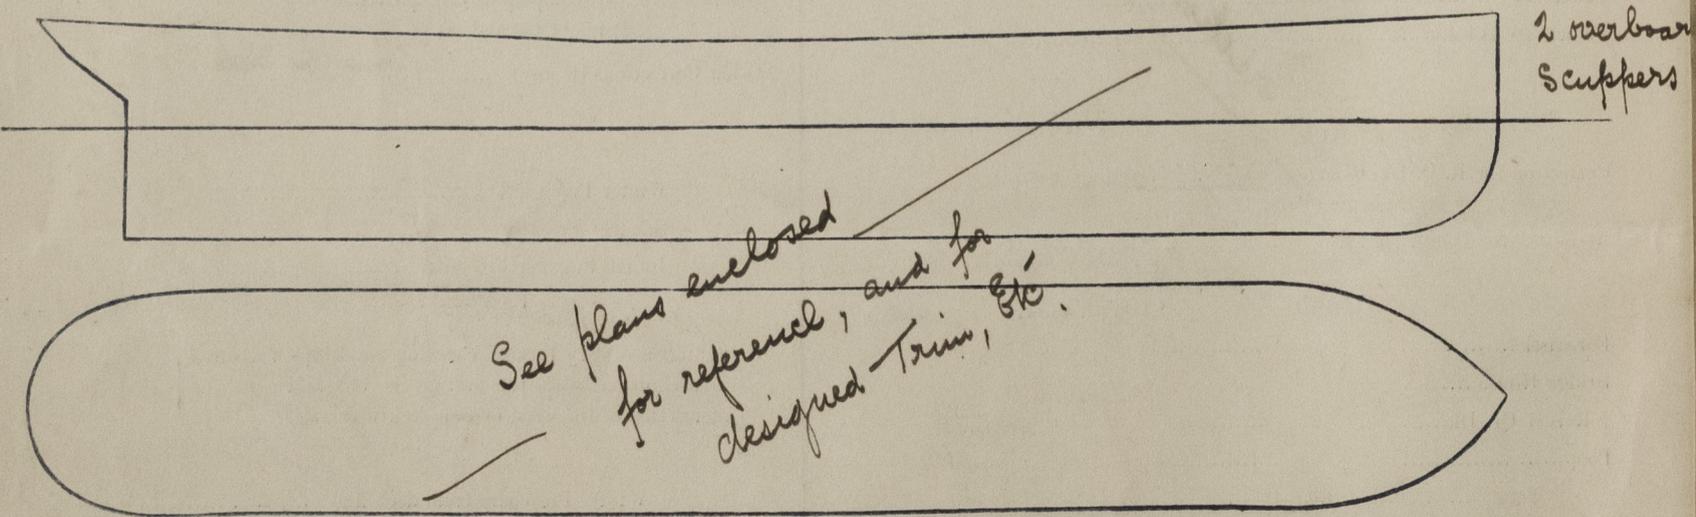

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel *Req. for towing purposes. Freeboard to enable vessel to proceed to Port Elizabeth, South Africa, to be assigned subject to being suitably prepared in accordance with app. plans, and such preparations being carried out to the satisfaction of the Senior Surveyor at Glasgow and the local Surveyor Owners Union Castle Mail S.S. Co. Ltd. The Verification form to be endorsed accordingly and signed by each Surveyor. Pld. request form enclosed.*

Address *3. Fenchurch St. E.C.3.*

Fee £ *2 - 0 - 0* To be charged with *1st. Entry.*

