

REC'D NEW YORK APR 27 1921

Index No. 29944
(For London Office only)

Rpt. 11b.

Lloyd's Register of Shipping.

SURVEYS FOR FREEBOARD.—STEAM SHIPS.

PARTICULARS RELATING TO ALL STEAM SHIPS EITHER FLUSH DECKED, OR WITH TOP GALLANT FORECASTLES, SHORT POOPS AND BRIDGE HOUSES DISCONNECTED, OR WITH TOP GALLANT FORECASTLES HAVING LONG POOPS, OR RAISED QUARTER DECKS CONNECTED WITH BRIDGE HOUSES, OR OTHERWISE.

Port of Survey Philadelphia
Date of Survey While Building
Name of Surveyor W. Booth

458

Ship's Name. S.S. "YANKEE ARROW" <i>New York S.B. Corp Hull. 260</i> Number in Register Book	Port of Registry and Nationality. NEW YORK. <i>U.S.A.</i>	Official Number. ✓	Gross Tonnage. ✓	Date of Build. 1921.	Particulars of Classification. +100 A.1. Shelter Dk With Fbd (Contemplated)
--	--	------------------------------	----------------------------	--------------------------------	---

Registered dimensions from Ship's Register.	LENGTH. 467.6	BREADTH. 62.72	DEPTH. 32.0	UNDER DECK TONNAGE. 7503.53
Length on LOADLINE.	468	Frame Depth Rule 7	Ceiling Sheer +1.20 +1.59	Peak Tanks } <i>Incl</i>
CORRECTED DIMENSIONS.	468	62.55	32.59	7503.53

Moulded Depth as measured..... **32.0** ✓
 Addition for Keel below base line for draught record... **2.22** inches.

NOTE.—If the depth is measured when vessel is afloat, the details of measurement should be reported.

Co-efficient of fineness..... **.78** ✓
 Any modification necessary {
 [Para. 4 (a) to (e)]* }
 Co-efficient as corrected

CORRECTION FOR LENGTH.

Length of Ship on Loadline.....	468 ✓
Length in Table	384 ✓
Difference	84 ✓
Correction for 10ft., Table A.	1.6 ✓ Table C. ✓
× Difference divided by 10	13.44 ✓ (if required.)
If $\frac{1}{10}$ ths length covered divide by 2	6.7 ✓ +6.74 ✓

Sheer { Stem..... **108** }
 at { Sternpost ... **48** } **156 ÷ 2 = 78** ... Mean

Sheer at $\frac{1}{2}$ of the length from { Stem **59.5** }
 { Sternpost **26.5** } **86.0 ÷ 2 = 42.9** Mean

Gradual mean Sheer **78.03** $\div 55 = 1.418106$

Standard mean Sheer [Table, Para. 18] **56.8** Correction

Difference..... **21.23** $\div 4 = 5.31$ ✓

§ If limited as Para. 18 (f) **-5.71** ✓

CORRECTION FOR IRON DECK.

Proportion covered, if less than $\frac{1}{10}$ ths length covered

Thickness of usual wood deck, less stringer **3.2** ✓

Rise in Sheer { At front of bridge house..... }
 from amidships { At after end of forecastle

CORRECTION FOR ROUND OF BEAM.

Breadth at Gunwale amidships.....	62.0 ✓
Round of Beam	14.91 ✓
Normal round.....	15.5 ✓
Difference6 ✓ $\div 2 = .3$ ✓
Proportion of Deck uncovered (Para. 19)	✓

NOTE.—The round of beam should be reported on the full breadth of vessel at the gunwale.

¶ Fall in Sheer {
 Para. 18 (d) } $\div 2 =$
 Length uncovered Correction

Freeboard, Table A	8.5 1/2 ✓
Correction for Sheer	-5.4 ✓
Correction for Length	8.0 1/2 ✓
Allowance for Deck Erections	2.7 ✓
Correction for Round of Beam.....	6.0 ✓
Correction for fall in Sheer (if any).....	✓
Correction for Iron Deck (if required)	-3.2 ✓
Additions for non-compliance with provisions of Para. 11 (d) and (e) †	5.8 1/2 ✓
Other Corrections (if any)	✓

ALLOWANCE FOR DECK ERECTIONS:—

Freeboard, Table C.....	5.3 ✓
Correction for Length, if required (Para. 12, 13, and 14)	✓
Freeboard by Table A, corrected for sheer, and for length, if required (Para. 12, 13, and 14) }	8.0 1/2 ✓
Difference	2.9 1/2 ✓
Percentage as below.....	93.5 ✓
	31.08 ✓

Correction for R. Q. Dk. if engine and boiler openings not covered by bridge house (Para. 11) }

Allowance for Deck Erections

Winter Freeboard	5.8 1/2 ✓
Summer Freeboard	5.2 ✓
Indian Summer Freeboard	4.7 1/2 ✓
N. A. Winter Freeboard	✓
Correction necessary because clearside amidships, measured in accordance with the Statute is not taken at the intersection of the wood or iron deck with side.	1.34 ✓

	Length.	Length allowed.	Height.
Forecastle.....	352.33	351.46 ✓	7.6
Bridge House.....	8.00		
↑ Raised Qr. Dk.....			
Poop.....	197.67	196.84 ✓	7.6
Total.....	468.00	464.30 ✓	
Length of Ship	$\frac{1}{2}$ diff	6.85	
Corresponding percentage {		461.15 ✓	= 98.5 ✓
(Para. 11, 12, 13, or 14) }		468	= 98.5 % ✓

Winter Freeboard from deck line	5.10 1/2 ✓
Summer " " " "	5.3 1/2 ✓
Indian Summer " " " "	4.9 1/4 ✓
N. A. Winter " " " "	✓
5" 3/2	5.4 1/2 ✓
7/2	5.1 1/2 ✓
6/2	5.0 1/2 ✓
6/2	5.0 1/2 ✓

FREEBOARD recommended amidships from centre of Disc to top of Statutory Deck Line, Wood (Iron) Deck:—

Fresh Water Line	above centre of Disc	...
Indian Summer Line	" " "	...
Winter Line	below " " "	...
Winter North Atlantic Line	" " "	...

† If the frames, skin planking, or ceiling are of unusual thickness the breadth of vessel to inside of ceiling should be reported if possible.
 ‡ In vessels obtaining an allowance for deck erections under Para. 11 where the sheer drops abaft amidships the height of the R.Q.D. is to be taken from the level of the top of the amidship beam.
 § In flush-decked vessels the total standard mean sheer means the sheer measured at the stem and sternpost. In vessels having poops and forecastles, it means the sheer measured at points distant one-eighth of the vessel's length from stem and sternpost.

† State dimensions of freeing port area on back of this form.
 ‡ The Surveyor should state whether the fall in sheer as reported is measured relatively to the straight line of keel or to the water line. If measured relatively to water line the vessel's draft at time of survey, and also the usual load draft forward and aft, should be reported.

Do all the Frames extend to the top height in the Poop? *Yes* Raised Quarter Deck? *✓* Bridge House? *Yes* Forecastle? *Yes*
 To what height do the Reverse Frames extend? *Longitudinal Framing*
 Has the Poop or Raised Quarter Deck an efficient Iron Bulkhead at the fore end? *Yes*
 Give particulars of the means for closing the openings in Bulkhead *No openings*
 Is the Poop or Raised Quarter Deck connected with the Bridge House? *Yes* Has the Bridge House an efficient Bulkhead at the fore end?
 Give particulars of the means for closing the openings in Bulkhead *Complete Shelter Deck*
 What is the thickness of the Bridge Front plating? and Coaming plate
 Give scantlings and spacing of the Stiffeners
 Are bracket plates fitted at each end of the Stiffeners? Are hor'l. brackets fitted connecting Bridge Bulk'd. with Bulwarks?
 Has the Bridge House an efficient Iron Bulkhead at the after end? *Yes*
 How are the openings closed? *Storm Boards in riveted channels to full height*
 Is the Forecastle at least as high as the main or top-gallant rail? Has the Forecastle an efficient Iron or Wood Bulk'd. at after end?
 Are the Engine and Boiler openings covered by a Bridge, Poop, Raised Quarter Deck, or enclosed by a Strong Iron or Steel Deckhouse? *by Shelter Deck*
 If the openings are not so protected are the exposed parts of the Casings efficiently constructed? *✓*
 Give thickness of plating; scantlings and spacing of Stiffeners
 What is the height of the exposed Casings? Are suitable means provided for closing all openings in them in bad weather? *✓*
 Are the Weather Deck Hatchways efficiently constructed and at least equal to the requirements of Section 28 of the Rules for 1904-5? Give particulars below:— *Yes.*


Position and Size.	No. 1. 12x16		No. 2+8. 9'-3" x 20'-0"		No. 3+4. 8'-2" x 20'-0"		No. 5+7. 18'-8" x 20'-0"		No. 6. 7' x 18'	
	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.	Ship.	Rule.
COAMING: Height above top of DECK	27	24	24	24	24	24	2.4	2.4	2.4	2.4
COAMING: Thickness	Sides.....	18"	18" for all hatches.							
	Ends.....									
SHIFTING BEAMS OR WEB PLATES.	Number.....	Three	one	15" x 18"	Three	15" (1) 20 1/2" + (2) 18"	Three	same as No. 4.	one	13" x 10"
	Section and Scantlings.....	PL 10 (1) 14 1/2" x (2) 12"	LS 4 x 3 x 9.8	(1) 18" (2) 10 1/2"	LS 4 x 3 x 9.8.	LS 3 x 3 x 8.3				
	Material.....	Steel								
* FORE AND AFTERS.	Number.....									
	Section and Scantlings.....	None								
	Material.....									
HATCHES Thickness.....	* Pitch pine									
Remarks.....										

* The depth of Fore and Afters should be stated from the underside of the hatches in all cases.
 (If the sill of the lowest side scuttle will be less than 6 inches above the Indian Summer Load Line if assigned under the tables, state vertical distance from top of deck at side amidships to lower edge of lowest side scuttle.)

The following information is to be given in all Cases of vessels dealt with under Paras. 11, 12 (under 15 feet Moulded depth) and under Shelter Deck Rules.
 What is the thickness of the Bridge Sheerstrake? *.82* Strake between Main and Bridge Sheerstrakes? *.76*

Delete the words { The Crew ~~are~~, are not, berthed in the bridge house.
 that do not apply { The arrangements to enable them to get backwards and forwards from their quarters are, ~~are not~~ satisfactory.

Length of Bulwarks in well *45'-2"*
 Area of Freeing Ports required by Para. 11 (e) each side of vessel = Sq. ft.
 Ft. Tenths. Ft. Tenths. No. } Freeing Ports = *6.3* Sq. ft.
3.5 x *1.8* x *1*
 (each side of vessel)
 Total deficiency or excess = Sq. ft.

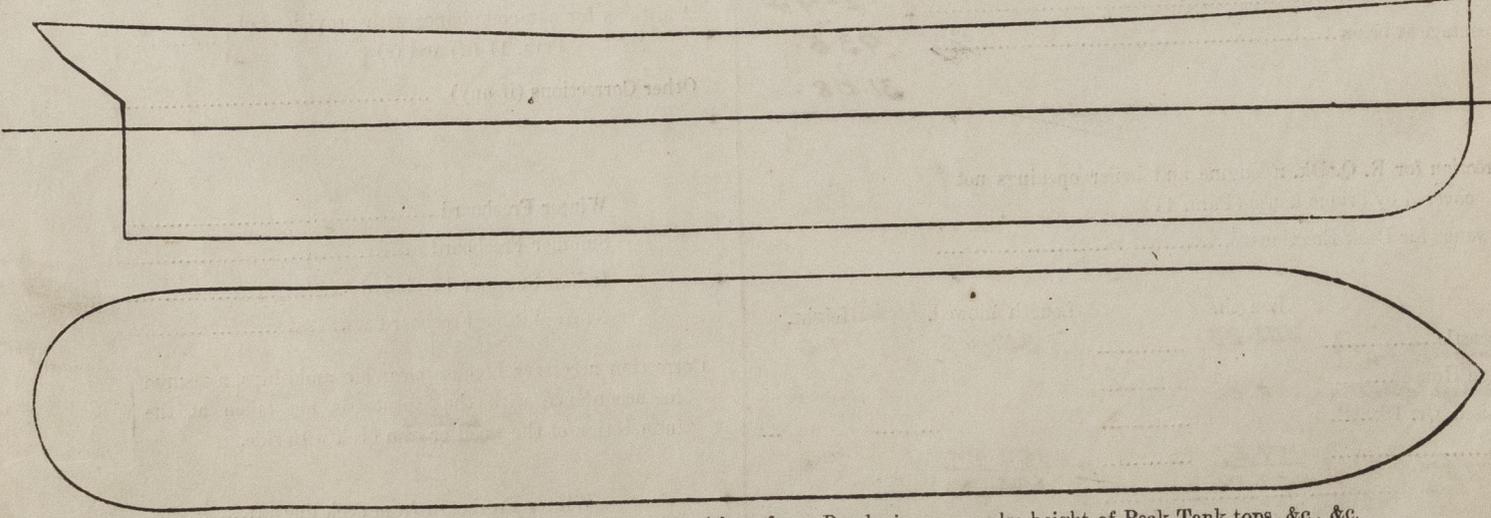

Show hereon line of Floors or Tank Top with position of any Breaks in same; also height of Peak Tank tops, &c., &c.

State any special features in the construction of the Vessel *This vessel is a sister ship to the S.S. "Standard Arrow" Phila Rpt 2412. The same builders hull, 167. Copy of freeboard diagram is forwarded with showing change of location of Poop bulk. Copies of approved plans are in London. Fbd Request form attached herewith, also curves of displacement etc.*
 Owners *New York S. S. Corp.*

Address *Camden, N. J.*

Fee £ : : Received by me *Wm Booth* will be charged with *Fast Entry Report*

Lloyd's Register
 26th April 21
 Foundation