

REPORT ON MACHINERY.

No. 16404

WED. MAR. 19. 1913

Date of writing Report 1913 When handed in at Local Office 16/3/1913 Port of Greenock
 No. in Survey held at Port Glasgow Date, First Survey 10th Jan'y Last Survey 18th Jan'y 1913
 Reg. Book. on the S.S. LINDMERE (Number of Visits 2) Tons ^{Gross} 1579 _{Net} 853
 Master Built at Port Glasgow By whom built Murdoch & Mansfield When built 1913
 Engines made at Glasgow By whom made Price & Houston Ltd when made 1913
 Boilers made at _____ By whom made _____ when made _____
 Registered Horse Power _____ Owners Herbert Watson & Co Port belonging to Manchester
 Nom. Horse Power as per Section 28 _____ Is Refrigerating Machinery fitted for cargo purposes _____ Is Electric Light fitted _____

ENGINES, &c.—Description of Engines

No. of Cylinders _____ No. of Cranks _____

Dia. of Cylinders _____ Length of Stroke _____ Revs. per minute _____ Dia. of Screw shaft ^{as per rule} _____ _{as fitted} _____ Material of screw shaft _____

Is the screw shaft fitted with a continuous liner the whole length of the stern tube _____ Is the after end of the liner made water tight in the propeller boss _____ If the liner is in more than one length are the joints burned _____ If the liner does not fit tightly at the part between the bearings in the stern tube, is the space charged with a plastic material insoluble in water and non-corrosive _____ If two liners are fitted, is the shaft lapped or protected between the liners _____ Length of stern bush _____

Dia. of Tunnel shaft ^{as per rule} _____ _{as fitted} _____ Dia. of Crank shaft journals ^{as per rule} _____ _{as fitted} _____ Dia. of Crank pin _____ Size of Crank webs _____ Dia. of thrust shaft under collars _____ Dia. of screw _____ Pitch of Screw _____ No. of Blades _____ State whether moveable _____ Total surface _____

No. of Feed pumps _____ Diameter of ditto _____ Stroke _____ Can one be overhauled while the other is at work _____
 No. of Bilge pumps _____ Diameter of ditto _____ Stroke _____ Can one be overhauled while the other is at work _____
 No. of Donkey Engines _____ Sizes of Pumps _____ No. and size of Suctions connected to both Bilge and Donkey pumps _____
 In Engine Room _____ In Holds, &c. _____

No. of Bilge Injections _____ sizes _____ Connected to condenser, or to circulating pump _____ Is a separate Donkey Suction fitted in Engine room & size _____
 Are all the bilge suction pipes fitted with roses _____ Are the roses in Engine room always accessible _____ Are the sluices on Engine room bulkheads always accessible _____
 Are all connections with the sea direct on the skin of the ship Yes Are they Valves or Cocks Both
 Are they fixed sufficiently high on the ship's side to be seen without lifting the stokehold plates _____ Are the Discharge Pipes above or below the deep water line _____
 Are they each fitted with a Discharge Valve always accessible on the plating of the vessel Yes Are the Blow Off Cocks fitted with a spigot and brass covering plate Yes
 What pipes are carried through the bunkers _____ How are they protected _____
 Are all Pipes, Cocks, Valves, and Pumps in connection with the machinery and all boiler mountings accessible at all times _____
 Are the Bilge Suction Pipes, Cocks, and Valves arranged so as to prevent any communication between the sea and the bilges _____
 Dates of examination of completion of fitting of Sea Connections 18/1/13 of Stern Tube 10/1/13 Screw shaft and Propeller 18/1/13
 Is the Screw Shaft Tunnel watertight _____ Is it fitted with a watertight door _____ worked from _____

BOILERS, &c.—(Letter for record _____) Manufacturers of Steel _____

Total Heating Surface of Boilers _____ Is Forced Draft fitted _____ No. and Description of Boilers _____

Working Pressure _____ Tested by hydraulic pressure to _____ Date of test _____ No. of Certificate _____

Can each boiler be worked separately _____ Area of fire grate in each boiler _____ No. and Description of Safety Valves to each boiler _____ Area of each valve _____ Pressure to which they are adjusted _____ Are they fitted with easing gear _____

Smallest distance between boilers or uptakes and bunkers or woodwork _____ Mean dia. of boilers _____ Length _____ Material of shell plates _____ Thickness _____ Range of tensile strength _____ Are the shell plates welded or flanged _____ Descrip. of riveting: cir. seams _____ long. seams _____ Diameter of rivet holes in long. seams _____ Pitch of rivets _____ Lap of plates or width of butt straps _____

Per centages of strength of longitudinal joint ^{rivets} _____ _{plate} _____ Working pressure of shell by rules _____ Size of manhole in shell _____

Size of compensating ring _____ No. and Description of Furnaces in each boiler _____ Material _____ Outside diameter _____

Length of plain part ^{top} _____ _{bottom} _____ Thickness of plates ^{crown} _____ _{bottom} _____ Description of longitudinal joint _____ No. of strengthening rings _____

Working pressure of furnace by the rules _____ Combustion chamber plates: Material _____ Thickness: Sides _____ Back _____ Top _____ Bottom _____

Pitch of stays to ditto: Sides _____ Back _____ Top _____ If stays are fitted with nuts or riveted heads _____ Working pressure by rules _____

Material of stays _____ Diameter at smallest part _____ Area supported by each stay _____ Working pressure by rules _____ End plates in steam space: _____

Material _____ Thickness _____ Pitch of stays _____ How are stays secured _____ Working pressure by rules _____ Material of stays _____

Diameter at smallest part _____ Area supported by each stay _____ Working pressure by rules _____ Material of Front plates at bottom _____

Thickness _____ Material of Lower back plate _____ Thickness _____ Greatest pitch of stays _____ Working pressure of plate by rules _____


Diameter of tubes _____ Pitch of tubes _____ Material of tube plates _____ Thickness: Front _____ Back _____ Mean pitch of stays _____

Pitch across wide water spaces _____ Working pressures by rules _____ Girders to Chamber tops: Material _____ Depth and thickness of girder at centre _____ Length as per rule _____ Distance apart _____ Number and pitch of stays in each _____

Working pressure by rules _____ Superheater or Steam chest; how connected to boiler _____ Can the superheater be shut off and the boiler worked separately _____ Diameter _____ Length _____ Thickness of shell plates _____ Material _____ Description of longitudinal joint _____ Diam. of rivet holes _____ Pitch of rivets _____ Working pressure of shell by rules _____ Diameter of flue _____ Material of flue plates _____ Thickness _____

If stiffened with rings _____ Distance between rings _____ Working pressure by rules _____ End plates: Thickness _____ How stayed _____

Working pressure of end plates _____ Area of safety valves to superheater _____ Are they fitted with easing gear _____

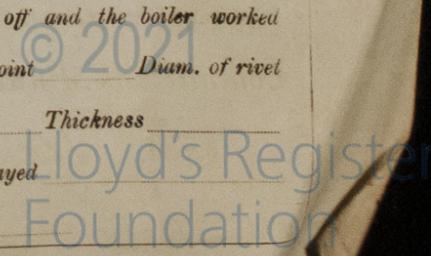

VERTICAL DONKEY BOILER— *Manufacturers of Steel*

No. _____ Description _____

Made at _____ By whom made _____ When made _____ Where fixed _____

Working pressure _____ tested by hydraulic pressure to _____ Date of test _____ No. of Certificate _____ Fire grate area _____ Description of Safety _____

Valves _____ No. of Safety Valves _____ Area of each _____ Pressure to which they are adjusted _____ Date of adjustment _____

If fitted with casing gear _____ If steam from main boilers can enter the donkey boiler _____ Dia. of donkey boiler _____ Length _____

Material of shell plates _____ Thickness _____ Range of tensile strength _____ Descrip. of riveting long. seams _____

Dia. of rivet holes _____ Whether punched or drilled _____ Pitch of rivets _____ Lap of plating _____ Per centage of strength of joint _____ Rivets _____ Plates _____

Working pressure of shell by rules _____ Thickness of shell crown plates _____ Radius of do. _____ No. of stays to do. _____ Dia. of stays _____

Diameter of furnace Top _____ Bottom _____ Length of furnace _____ Thickness of furnace plates _____ Description of joint _____

Working pressure of furnace by rules _____ Thickness of furnace crown plates _____ Radius of do. _____ Stayed by _____

Diameter of uptake _____ Thickness of uptake plates _____ Thickness of water tubes _____ Dates of survey _____

SPARE GEAR. State the articles supplied:—

The foregoing is a correct description,

Manufacturer.

Dates of Survey while building { During progress of work in shops - - - }
 { During erection on board vessel - - - }
 Total No. of visits *two.*

1913. Janry 10-18.

Is the approved plan of main boiler forwarded herewith

" " " donkey " " "

Dates of Examination of principal parts—Cylinders _____ Slides _____ Covers _____ Pistons _____ Rods _____

Connecting rods _____ Crank shaft _____ Thrust shaft _____ Tunnel shafts _____ Screw shaft _____ Propeller _____

Stern tube _____ Steam pipes tested _____ Engine and boiler seatings *10/1/13.* Engines holding down bolts _____

Completion of pumping arrangements _____ Boilers fixed _____ Engines tried under steam _____

Main boiler safety valves adjusted _____ Thickness of adjusting washers _____

Material of Crank shaft _____ Identification Mark on Do. _____ Material of Thrust shaft _____ Identification Mark on Do. _____

Material of Tunnel shafts _____ Identification Marks on Do. _____ Material of Screw shafts _____ Identification Marks on Do. _____

Material of Steam Pipes _____ Test pressure _____

General Remarks (State quality of workmanship, opinions as to class, &c. *The propeller, stem tube, & fastenings of sea connections examined before launching & found in order.*)

Certificate (if required) to be sent to
 (The Surveyors are requested not to write on or below the space for Committee's Minute.)

The amount of Entry Fee .. £ : : When applied for, _____

Special .. £ : :19.....

Donkey Boiler Fee .. £ : : When received, _____

Travelling Expenses (if any) £ : :19.....

Harbottle.
 Engineer Surveyor to Lloyd's Register of British & Foreign Shipping.

Committee's Minute **GLASGOW** 18 MAR. 1913

Assigned *See minute on G.S. R.M. 32462*

